

Atlantic Ocean influence on a shift in European climate in the 1990s

Article

Accepted Version

Sutton, R. ORCID: <https://orcid.org/0000-0001-8345-8583> and
Dong, B. ORCID: <https://orcid.org/0000-0003-0809-7911>
(2012) Atlantic Ocean influence on a shift in European climate
in the 1990s. Nature Geoscience, 5. pp. 788-792. ISSN 1752-
0908 doi: 10.1038/ngeo1595 Available at
<https://centaur.reading.ac.uk/30109/>

It is advisable to refer to the publisher's version if you intend to cite from the
work. See [Guidance on citing](#).

Published version at: <http://www.nature.com/ngeo/journal/v5/n11/full/ngeo1595.html>

To link to this article DOI: <http://dx.doi.org/10.1038/ngeo1595>

Publisher: Nature Publishing

All outputs in CentAUR are protected by Intellectual Property Rights law,
including copyright law. Copyright and IPR is retained by the creators or other
copyright holders. Terms and conditions for use of this material are defined in
the [End User Agreement](#).

www.reading.ac.uk/centaur

CentAUR

Central Archive at the University of Reading

Reading's research outputs online

Supporting Information

The epitaxial growth of ultra-thin palladium films on Re{0001}

Haitham A. Etman, Zhasmina V. Zheleva, Georg Held and Roger A. Bennett^a

School of Chemistry, University of Reading, Reading, RG6 6AD, UK

LEED-IV Calculations

Bulk diffraction was calculated using Pendry's layer doubling method for Re bulk inter-layer spacings of 2.23Å. Scattering phase shifts for Re and Pd atoms were calculated as a function of energy using the program package provided by Barbieri and Van Hove¹. The maximum angular momentum quantum number was set to 9. The imaginary and real parts of the inner potential were set to 4.4eV and -11.4eV (4.1 and -12.8eV), respectively for the clean surface (Pd film). Initially, the radial root mean square displacement for Re and Pd were assumed to be 0.084Å and 0.09Å, respectively. In the final stage of the searches the displacements were optimized together with the inner potential to obtain the best fit between theory and experiment. The

^a E-mail: r.a.bennett@reading.ac.uk, Telephone: +44 (0)118 378 8559


downhill simplex method was used for the structure optimization ². RR is the reliability of the R-

factor (R_p), $RR = \sqrt{\frac{8V_i}{\Delta E}}$, where V_i is the optical potential and ΔE is the total energy range analysed.


LEED-IV Figures

The full set of LEED-IV data and best fit curves are given in the following sets of images. For each the title is self explanatory and the black curves the data and the red curves the best fits.


Individual R_p values are indicated for each fit.

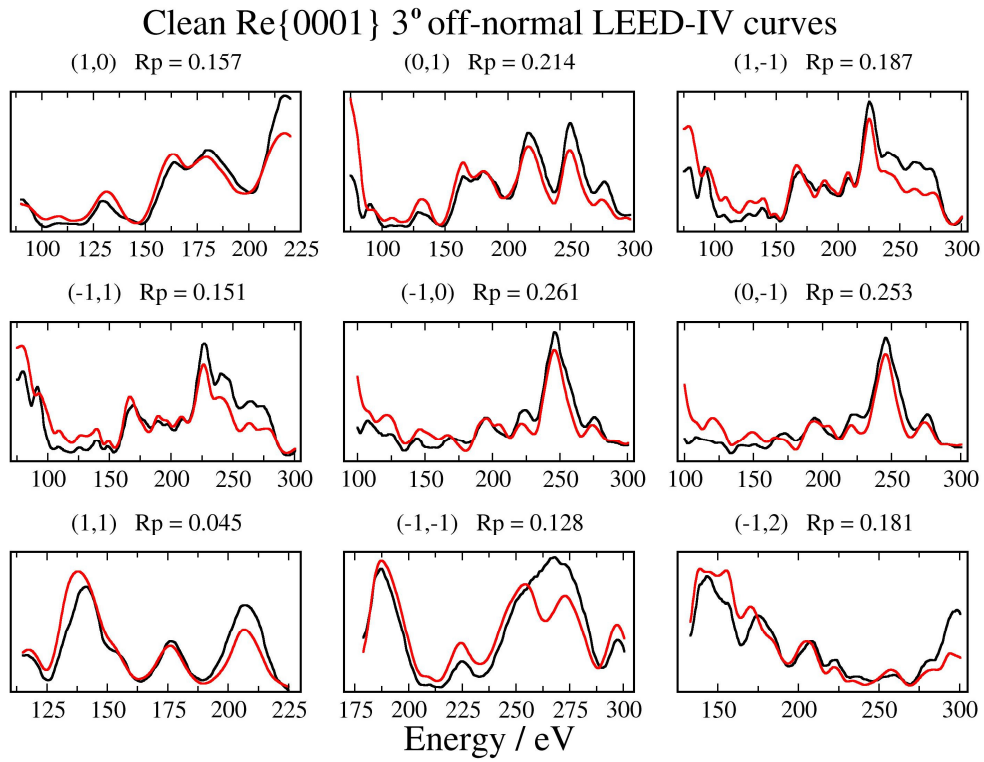


Clean Re{0001} 3° off-normal LEED-IV curves

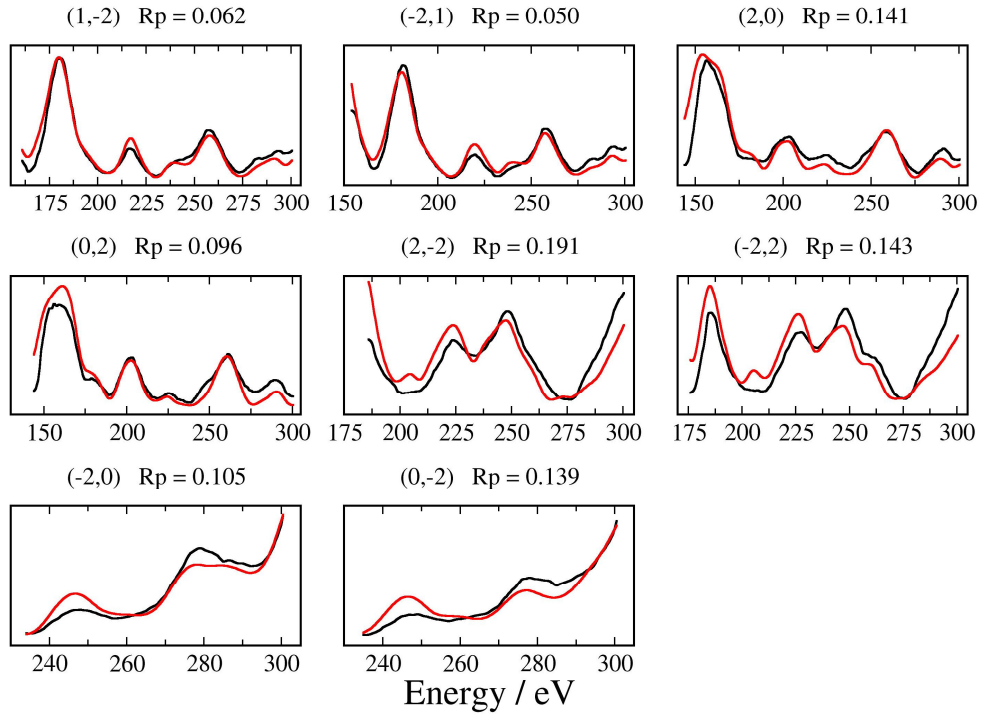


Clean Re{0001} -7° off-normal LEED-IV curves

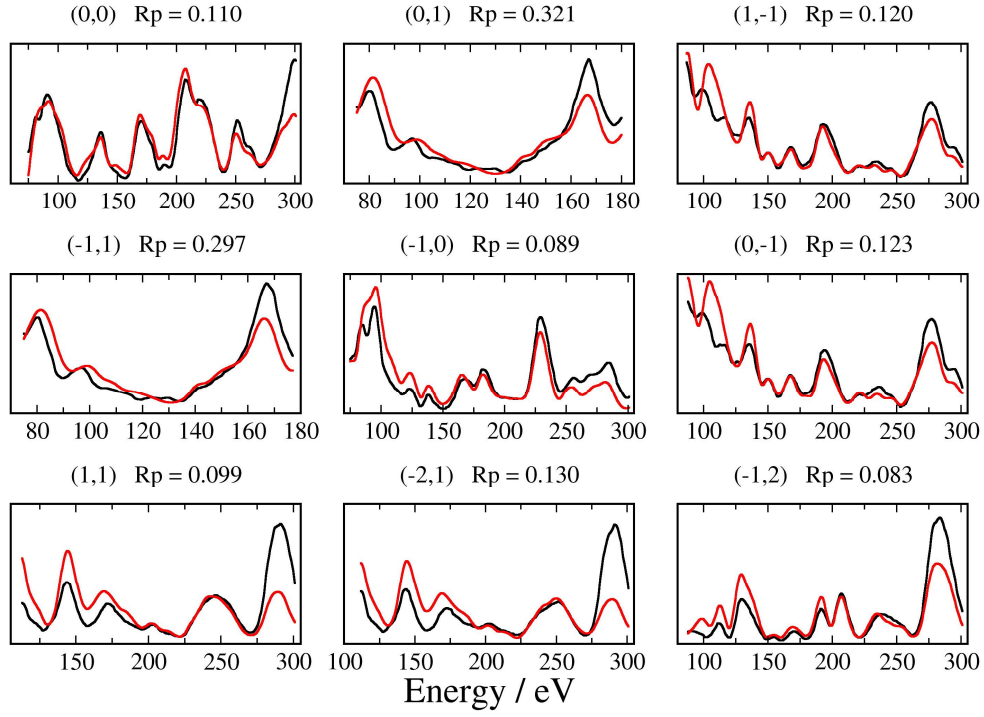


Clean Re{0001} -7° off-normal LEED-IV curves

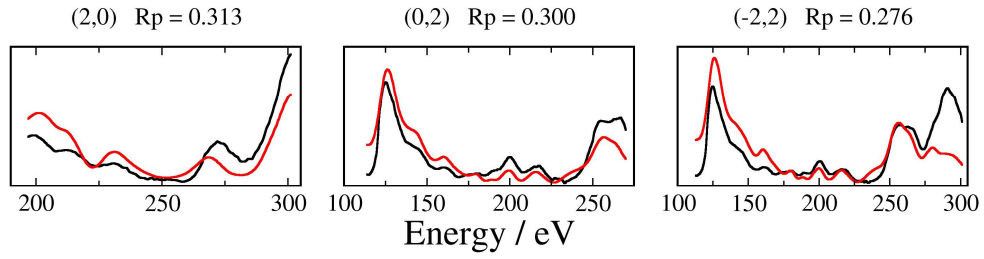


Clean Re{0001} 10° off-normal LEED-IV curves

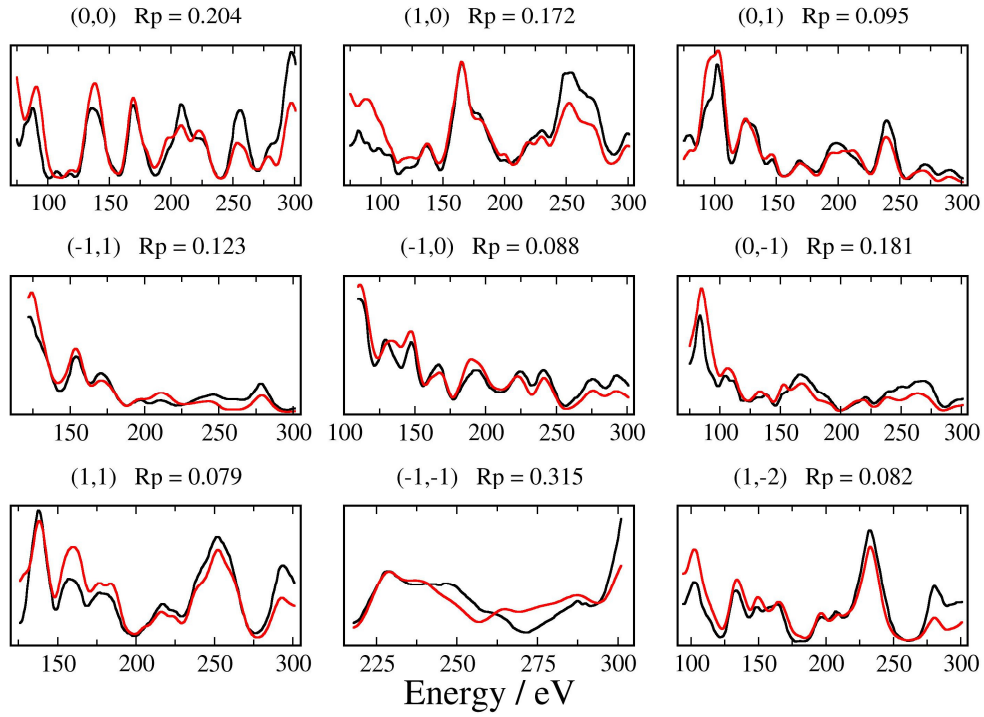


Clean Re{0001} 10° off-normal LEED-IV curves

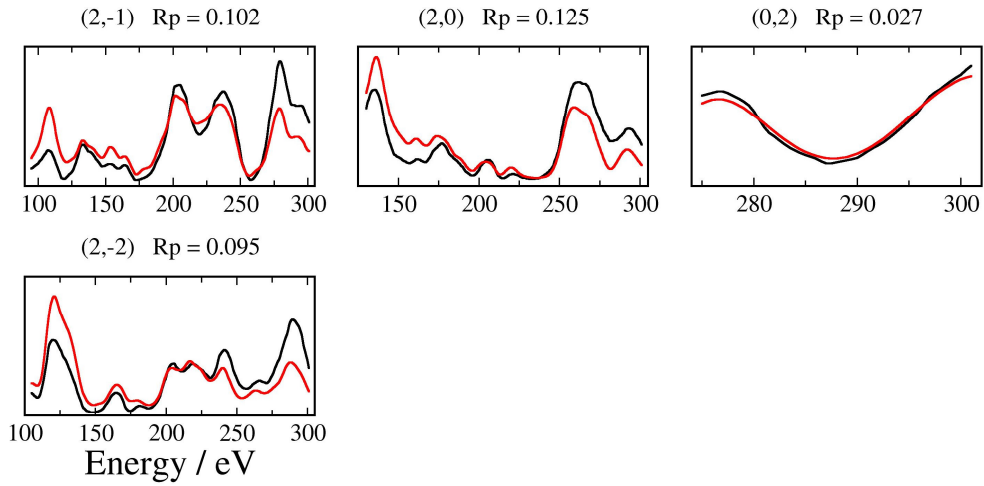


1MLPd/Re{0001} normal incidence LEED-IV curves

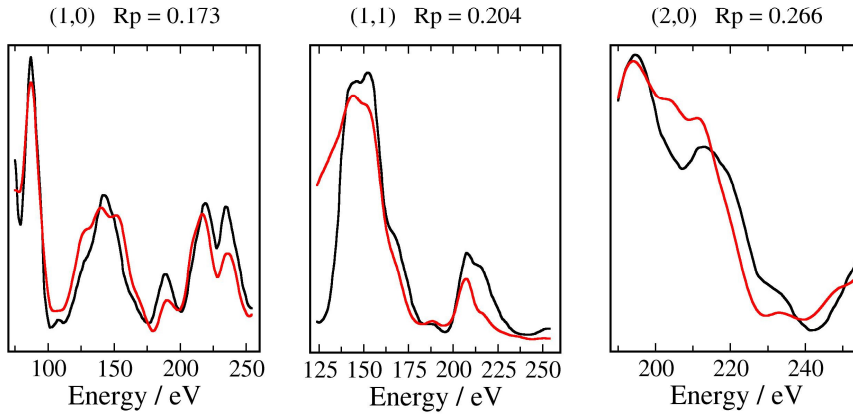


1MLPd/Re{0001} off-normal incidence LEED-IV curves

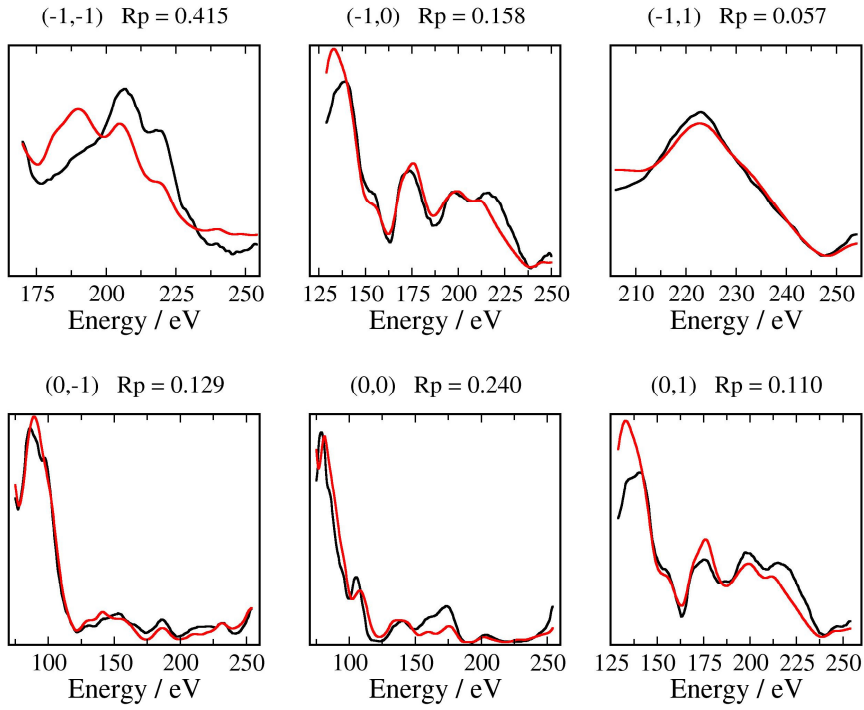


1MLPd/Re{0001} off-normal incidence LEED-IV curves

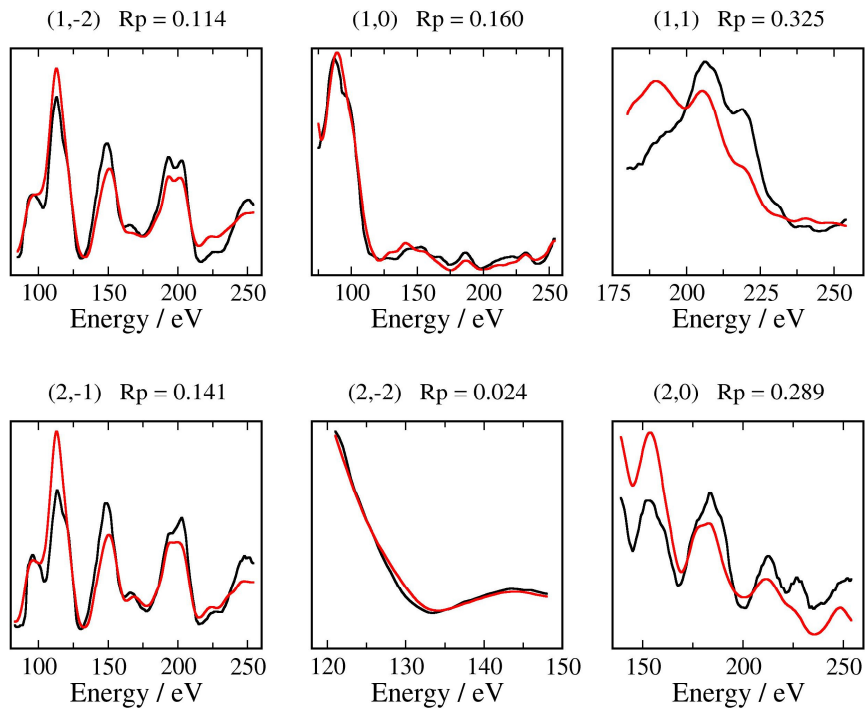


2MLPd/Re{0001} normal incidence LEED-IV curves

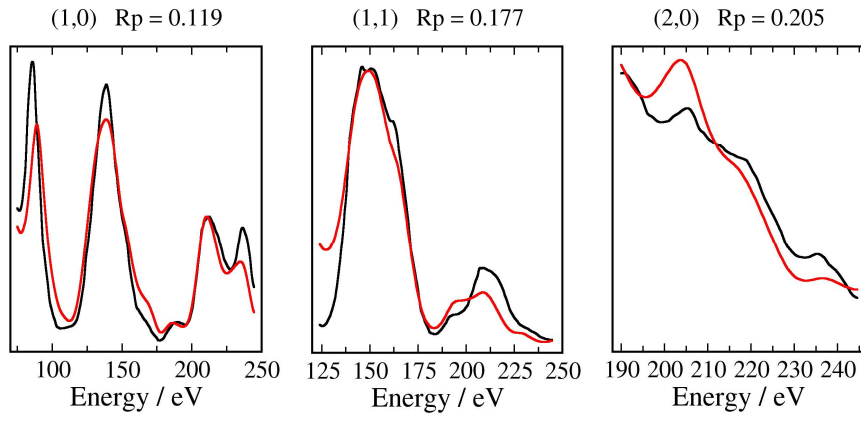


2MLPd/Re{0001} off-normal incidence LEED-IV curves

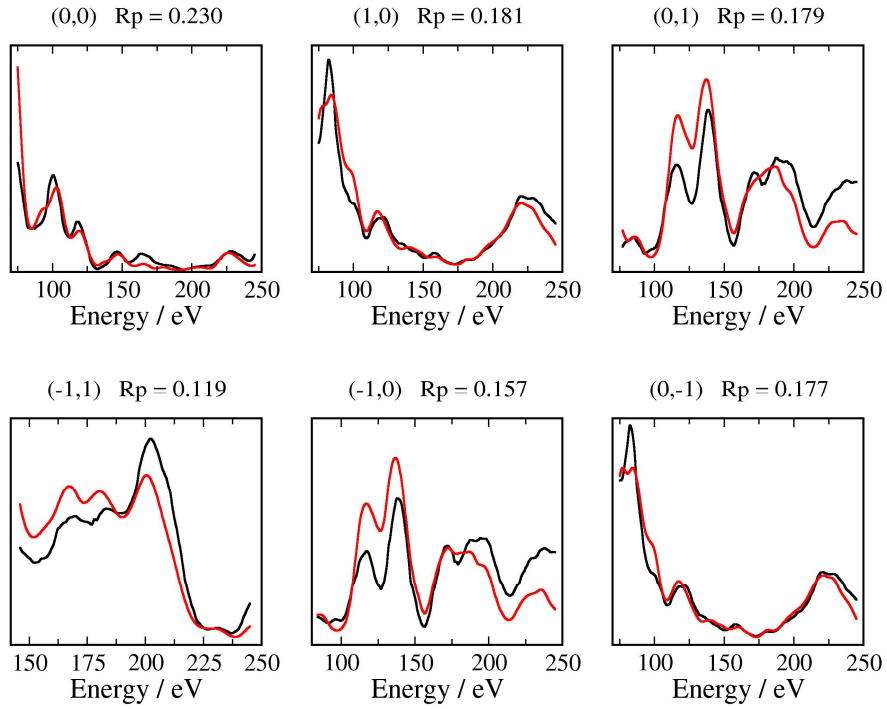


2MLPd/Re{0001} off-normal incidence LEED-IV curves

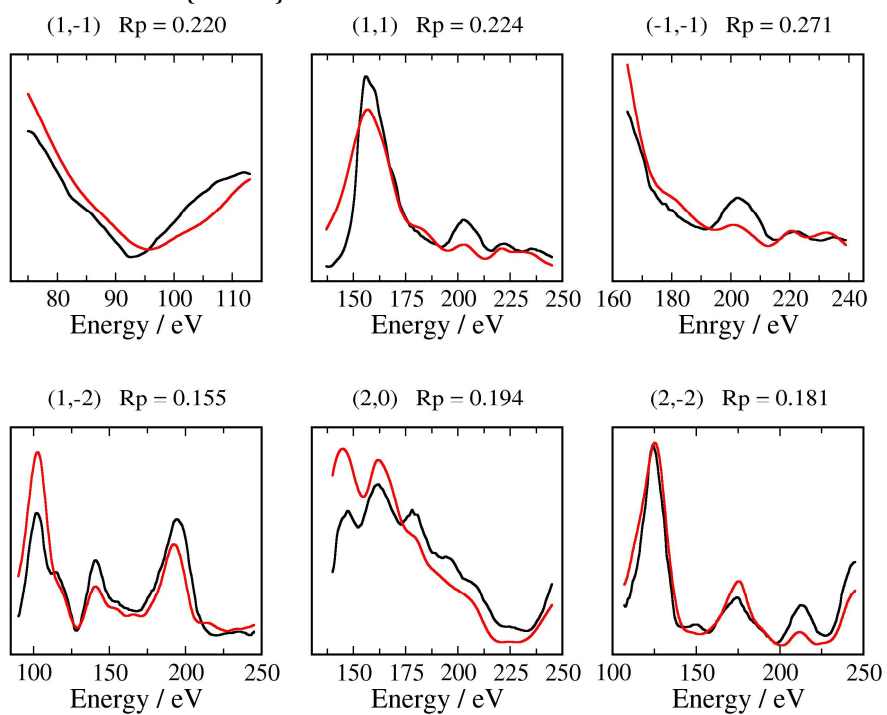


3MLPd/Re{0001} normal incidence LEED-IV curves

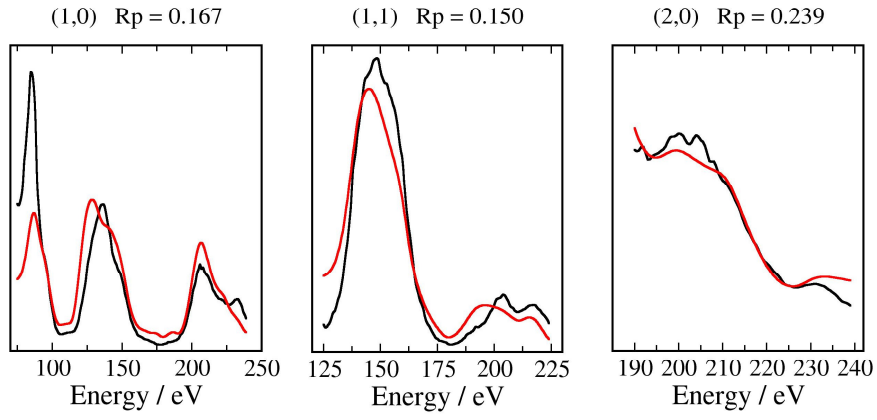


3MLPd/Re{0001} off-normal incidence LEED-IV curves

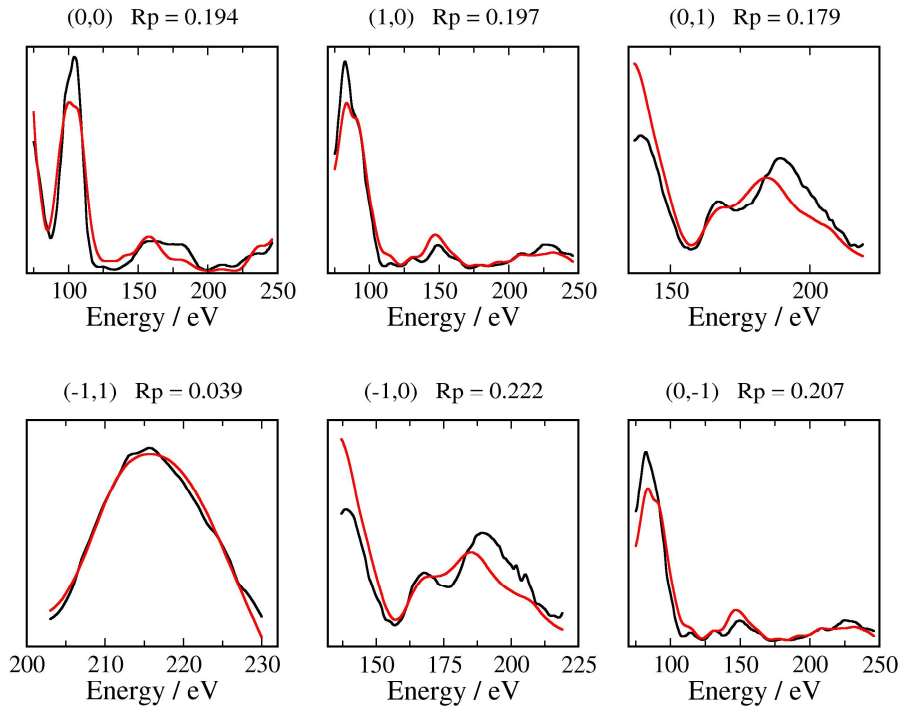


3MLPd/Re{0001} off-normal incidence LEED-IV curves

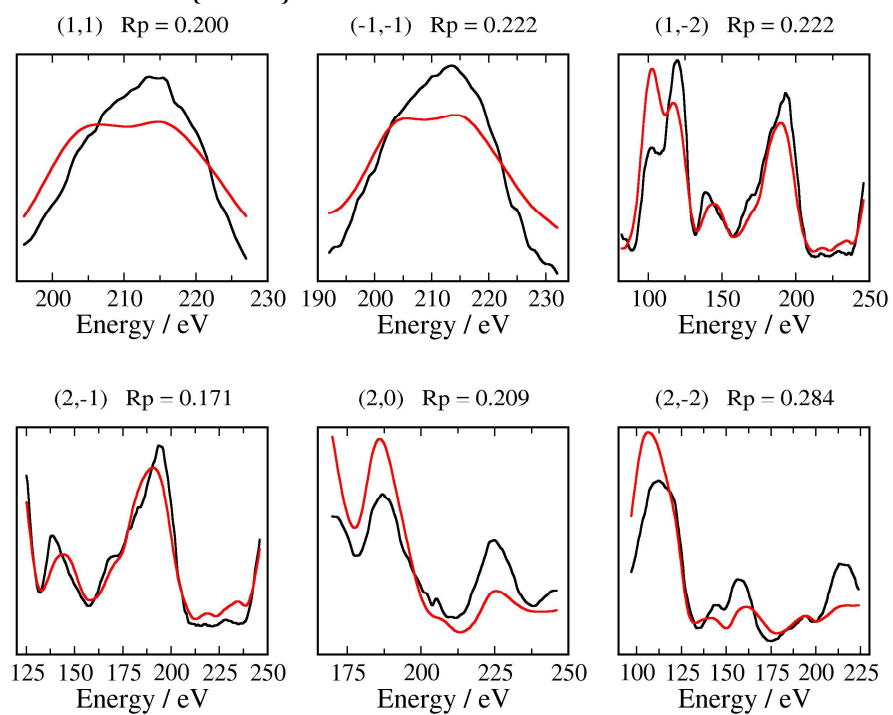


4MLPd/Re{0001} normal incidence LEED-IV curves

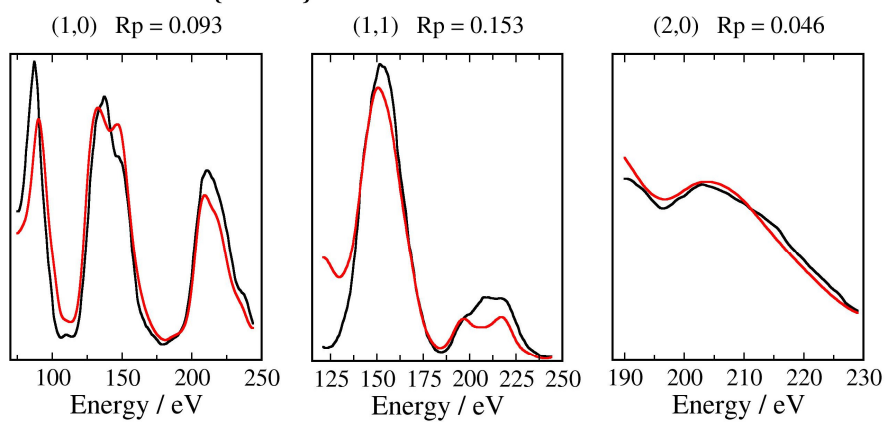

4MLPd/Re{0001} off-normal incidence LEED-IV curves

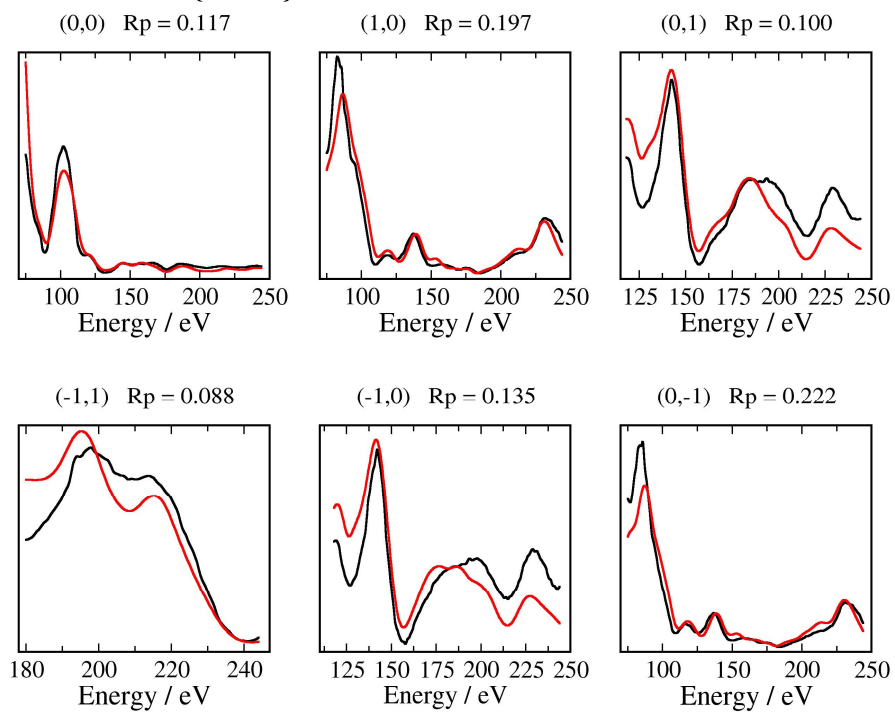

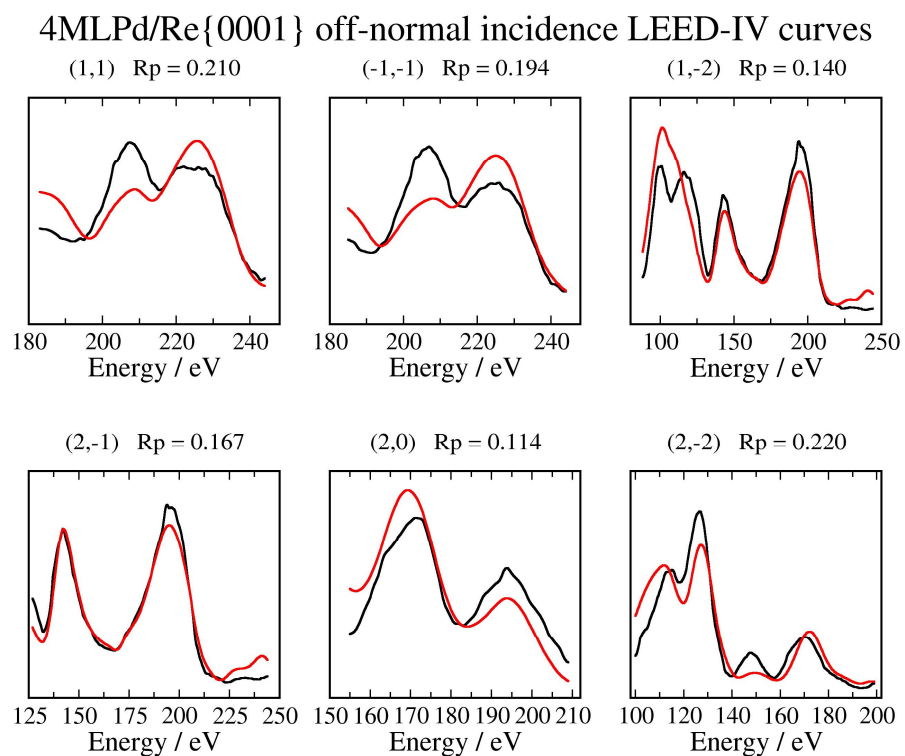

Supplementary References

- 1 Barbieri, A.; Van Hove, M. A. *Phase shift program package*, available from <http://electron.lbl.gov/software/software.html>
- 2 Press, W. H.; Flannery, B. P.; Teukolsky, S. A.; Vetterling, W. T. *Numerical Recipes in C*: Cambridge University Press: Cambridge, 1988.

