

Towards urban resilience through sustainable drainage systems: a multi-objective optimisation problem

Article

Supplemental Material

Creative Commons: Attribution-Noncommercial-No Derivative Works 4.0

McClymont, K., Cunha, D. G. F., Maidment, C. ORCID: <https://orcid.org/0000-0002-9158-6910>, Ashagre, B., Vasconcelos, A. F., de Macedo, M. B., dos Santos, M. F. N., Gomes Júnior, M. N., Mendiondo, E. M., Barbassa, A. P., Rajendran, L. and Imani, M. (2020) Towards urban resilience through sustainable drainage systems: a multi-objective optimisation problem. *Journal of Environmental Management*, 275. 111173. ISSN 0301-4797 doi: <https://doi.org/10.1016/j.jenvman.2020.111173> Available at <https://centaur.reading.ac.uk/92740/>

It is advisable to refer to the publisher's version if you intend to cite from the work. See [Guidance on citing](#).

To link to this article DOI: <http://dx.doi.org/10.1016/j.jenvman.2020.111173>

Publisher: Elsevier

All outputs in CentAUR are protected by Intellectual Property Rights law, including copyright law. Copyright and IPR is retained by the creators or other copyright holders. Terms and conditions for use of this material are defined in the [End User Agreement](#).

www.reading.ac.uk/centaur

CentAUR

Central Archive at the University of Reading

Reading's research outputs online

Supplementary materials¹

This section provides a summary of the key hydrological and hydraulics information used to build the analytical model in this study.

Table 3 – General information

Method	Horton
Build-up, Wash-off methods	Exponential
Min infiltration rate (mm/hr)	5
Max infiltration rate (mm/hr)	115
Decay (1/hr)	6
Evaporation: a time series (mm/day)	53.41

Table 4 – Build-up and wash-off parameters in the Mineirinho catchment

Land-use	Build-up									Wash-off								
	Max. buildup (kg/ha)			Rate constant			Coefficient			Exponent			Cleaning efficiency %			BMP efficiency %		
	TSS	TP	TN	TSS	P	TN	TSS	P	TN	TSS	P	TN	TSS	P	TN	TSS	P	TN
AGR*	337.96	0.00230	0.30	0.30	0.011	0.12	12.58	3.16	26.880	2.98	0.80	3.78	50	50	50	20	20	20
CGA*	37.54	0.00013	0.30	2.09	0.036	0.47	7.68	4.78	7.940	7.78	4.77	7.18	50	50	50	20	20	20
COM*	380.72	0.04900	0.26	0.32	0.011	0.23	11.24	0.77	25.690	4.54	0.51	5.32	50	50	50	20	20	20
FRS*	14.39	0.00011	0.22	0.58	0.018	0.19	3.54	2.37	4.250	5.37	1.38	5.40	50	50	50	20	20	20
IND*	448.91	0.05800	0.36	0.59	0.019	0.56	15.18	1.01	54.210	6.28	0.67	8.89	50	50	50	20	20	20
OPS*	214.87	0.00650	0.19	0.35	0.031	0.18	7.92	2.98	28.295	1.73	1.00	2.70	50	50	50	20	20	20
PNS*	18.77	0.00007	0.15	1.05	0.018	0.24	3.84	2.39	3.970	3.89	2.39	3.59	50	50	50	20	20	20
RDS*	117.29	0.00300	0.03	1.55	0.120	0.51	5.46	4.73	37.010	5.52	2.92	5.51	50	50	50	20	20	20
RGA*	37.54	0.00013	0.30	2.09	0.036	0.47	7.68	4.78	7.940	7.78	4.77	7.18	50	50	50	20	20	20
RSD*	18.00	0.03100	0.36	0.30	0.200	0.60	9.59	2.00	13.240	5.49	4.16	3.59	50	50	50	20	20	20

*AGR: Agriculture; CGA: Commercial Grass area; COM: Commercial; FRS: Forest; IND: Industrial; OPS: Open Space; PNS: Pines; RDS: Roads; RGA: Residential Grass area; RSD: Residential

Table 5 – GNR design parameters

Surface	Soil	Drainage mat/layer
Berm height (mm)	30	Thickness (mm) 50
Vegetation volume fraction	0.1	Porosity (volume fraction) 0.5
Surface roughness (Manning's n)	0.1	Field Capacity (volume fraction) 0.2
Surface slope (%)	1	Wilting point (volume fraction) 0.1
		Seepage rate (mm/hr) 0.5
		Conductivity slope 10
		Suction head (mm) 3.5

¹ Journal of Environmental Management, Vol 275, 1 December 2020, 111173 - <https://doi.org/10.1016/j.jenvman.2020.111173>

Table 6 – RNB design parameters

Storage depth (mm)	1000
Flow efficiency (mm/hr)	1
Flow exponent	0.5
Offset height (mm)	6
Drain delay (hr)	6

Table 7 – GSW design parameters

Berm height (mm)	600
	(3.0,1.0)
Width (top, bottom) (m))
Vegetation volume fraction	0.3
Surface roughness (Manning's n)	0.368
Channel slope* (%)	7
Swale side slope (run/rise)	1:1

* the average slope of sub-catchments within the Mineirinho Catchment

Table 8 – PVP design parameters

Surface	Soil	Pavement	Storage	Drain
Berm height (mm)	200	Thickness (mm)	50	Flow efficiency (mm/hr)
		0	Thickness (mm)	0
			150	
Vegetation volume fraction	0.1	Porosity (volume fraction)	0.5	Flow exponent
		0.5	Void ratio (voids/solids)	0.5
Surface roughness (Manning's n)	0.1	Field capacity (volume fraction)	0.2	Offset height (mm)
		0.2	Impervious surface fraction	6
Surface slope (%)	7	Wilting point (volume fraction)	0.1	
		0.1	Permeability (mm/hr)	
			100	
		Seepage rate (mm/hr)	0.5	
		0.5	Clogging factor	
			0	
		Conductivity slope	10	
		Suction head (mm)	3.5	

Table 9 – BIR design parameters in the Mineirinho catchment

Surface	Soil	Storage	Drain
Berm height (mm)	300	Thickness (mm)	Flow efficiency (mm/hr)
		500	0
Vegetation volume fraction	0.1	Porosity (volume fraction)	Flow exponent
		0.5	0.5
Surface roughness (Manning's n)	0.1	Field capacity (volume fraction)	Offset height (mm)
		0.2	6
Surface slope (%)	5	Wilting point (volume fraction)	
		0.1	
		Clogging factor	0
		Seepage rate (mm/hr)	0.5

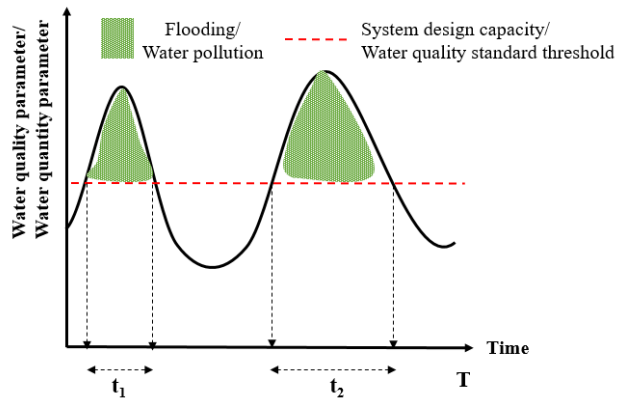


Fig. 1. Hypothetical flood resilience curve represents the excessive water beyond the design capacity of the drainage network over time; hypothetical water quality resilience curve demonstrates the violation of water quality from the defined water quality standards over time

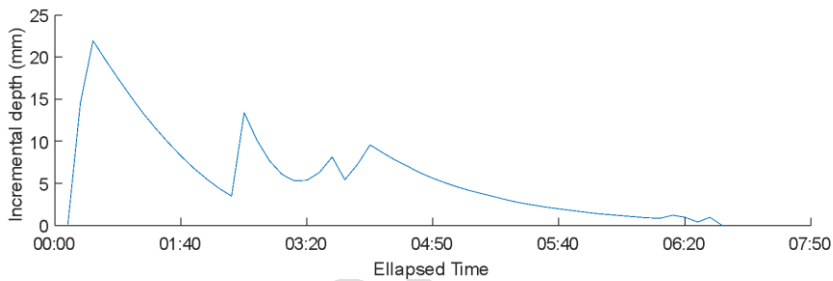


Fig. 2. The two-stage design storm rainfall pattern using Huff Heavy Storm equations