

Water balance components estimation under scenarios of land cover change in the Veia Catchment, West Africa

Article

Accepted Version

Larbi, I., Obuobie, E., Verhoef, A. ORCID:
<https://orcid.org/0000-0002-9498-6696>, Julich, S., Feger, K.-
H., Bossa, A. Y. and Macdonald, D. (2020) Water balance
components estimation under scenarios of land cover change
in the Veia Catchment, West Africa. *Hydrological Sciences
Journal*, 65 (13). pp. 2196-2209. ISSN 2150-3435 doi:
10.1080/02626667.2020.1802467 Available at
<https://centaur.reading.ac.uk/91306/>

It is advisable to refer to the publisher's version if you intend to cite from the work. See [Guidance on citing](#).

To link to this article DOI: <http://dx.doi.org/10.1080/02626667.2020.1802467>

Publisher: Taylor and Francis

All outputs in CentAUR are protected by Intellectual Property Rights law, including copyright law. Copyright and IPR is retained by the creators or other copyright holders. Terms and conditions for use of this material are defined in the [End User Agreement](#).

www.reading.ac.uk/centaur

CentAUR

Central Archive at the University of Reading

Reading's research outputs online



Water balance components estimation under scenarios of land cover change in the Vea Catchment, West Africa

Journal:	<i>Hydrological Sciences Journal</i>
Manuscript ID	HSJ-2019-0402.R2
Manuscript Type:	Original Article
Date Submitted by the Author:	30-Apr-2020
Complete List of Authors:	Larbi, Isaac; University of Abomey-Calavi Faculty of Science and Technology, climate change and water resources Obuobie, Emmanuel; CSIR-Water Research Institute, Verhoef, Anne; University of Reading, Julich, Stefan; TU Dresden Feger, Karl-Henze; Technische Universität Dresden Bossa, Aymar; University of Abomey-Calavi Faculty of Science and Technology Macdonald, David; British Geological Survey - Wallingford Office
Keywords:	Water balance components, Vea catchment, SWAT modeling, land cover change scenarios

SCHOLARONE™
Manuscripts

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

1 Water balance components estimation under scenarios of land cover
2 change in the Veia Catchment, West Africa

3 *Isaac Larbi¹, Emmanuel Obuobie², Anne Verhoef³, Stefan Julich⁴, Karl-
4 Henz Feger⁴, Aymar Yaovi Bossa⁵ and David M. J. Macdonald⁶

5 *1Climate Change and Water Resources, West African Science Service Centre on*
6 *Climate Change and Adapted Land Use (WASCAL), Universite d'Abomey Calavi,*
7 *Cotonou, Benin*

8 *2Water Research Institute, CSIR, Accra, Ghana;*

9 *3 Department of Geography and Environmental Science, University of Reading, UK*

10 *4 Institute of Soil Science and Site Ecology, Technische Universität Dresden, Germany*

11 *5National Water Institute, University of Abomey Calavi, 01 BP5, Cotonou, Benin*

12 *6 British Geological Survey, Wallingford, Oxfordshire, UK*

13 *Corresponding author: larbi.i@edu.wascal.org

Water balance components estimation under scenarios of land cover change in the Vea Catchment, West Africa

Abstract The need for a detailed investigation of the Vea catchment water balance components cannot be overemphasized due to its accelerated land cover dynamics and its associated impacts on the hydrological processes. This study assessed the possible consequences of land use change scenarios (i.e. business as usual (BAU) and afforestation, for the year 2025) compared to 2016 baseline, on the Vea catchment's water balance components using the Soil and Water Assessment Tool (SWAT) model. The data used include daily climate and discharge, soil and land use/land cover maps. The results indicate that the mean annual water yield may increase by 9.1% under BAU scenario, but decrease by 2.7% under afforestation scenario. Actual evapotranspiration would decrease under BAU scenario but increase under afforestation scenario. Groundwater recharge may increase under both scenarios, but more pronounced under the afforestation scenario. These outcomes highlights the significance of land cover dynamics in water resource management and planning at the catchment.

Keywords: Water balance components; Vea catchment; SWAT modeling; land cover change scenarios

1 INTRODUCTION

Although freshwater constitutes less than 3% of the world's water resources, it forms an important part of all terrestrial ecosystems. Concerns about the management of this limited resource in river basins have been on the increase due to changes in climatic conditions combined with anthropogenic influences (Jones *et al.* 2015, Zhang *et al.* 2008). Effective catchment management requires a thorough knowledge of the hydrological processes and their spatial distribution over the catchment (Wang *et al.* 2015). Land use/land cover (LULC) change is one of the main human induced activities which potentially impacts hydrology and water resources by affecting different hydrological processes and stores in the catchment (Bhaduri *et al.* 2000, Tang *et al.* 2005, Stonestrom *et al.* 2009). The changes in LULC have a direct and significant impact on the amount of evapotranspiration, surface runoff and groundwater recharge driven by infiltration during and after precipitation events (Doerr *et al.* 2000, Wei *et al.* 2013).

In the past decades, modelling of hydrological response to the changes in LULC has become increasingly important. The changes in LULC, such as the conversion of forest to agriculture and urban areas, have accelerated the rate of surface runoff and also affected other water balance components (Costa *et al.* 2003, Jat *et al.* 2009, Awotwi *et al.* 2014). A study conducted by Mwangi *et al.* (2016) on agroforestry impact on the hydrology of the Mara river basin, East Africa found a decrease in water yield (surface runoff, groundwater flow and lateral flow) due to the increase in tree cover. A similar study by Mango *et al.* (2010) investigated the hydrological response of the Mara River basin to land use change and found a decrease in river baseflow and average streamflow due to the conversion of forest to agriculture and grassland. Using a semi-distributed

hydrological modelling approach, Awotwi *et al.* (2014) estimated that the conversion of savanna (30.2%) and grassland (56.2%) to cropland caused a decrease in surface runoff and groundwater during the period from 1990 to 2006 in the White Volta basin (WVB) in West Africa. The above studies confirm that the water resources are under threat from the effects of LULC change.

In the past decades, several hydrological models have been developed to simulate the water balance of catchments, especially in data scarce regions. These catchment models are generally applied for water balance assessments (Ghoraba 2015, Vilaysane *et al.* 2015, Bansode and Patil, 2016, Yin *et al.* 2016) or climate/land use change impact assessments (Zhang *et al.* 2008, Mohamed, 2010, Palazzoli *et al.* 2015). Among these models, the physically based semi-distributed Soil and Water Assessment Tool (SWAT) model is a well-established model for estimation of water balance components, as well as for the analysis of the impact of land management practices on water, sediment and agricultural chemical yields in large complex catchments (Arnold *et al.* 1993). The SWAT model is one of the most widely used hydrologic models and has been applied in the USA, China, Europe, South Asia and Africa (Abbaspour *et al.* 2009). Hydrological models face challenges in terms of data requirements, spatial heterogeneity of basin characteristics, and how to represent complex terrestrial systems by model equations. SWAT is capable of overcoming some of these challenges (Gassman *et al.* 2007). The model has been used for a wide range of applications such as those relating to hydrology, including hydrological climate change impact studies (Gassman *et al.* 2007). In West Africa, a number of studies (Schuol and Abbaspour, 2007, Obuobie 2008, Kasei 2010, Kankam-Yeboah *et al.* 2013, Bossa *et al.* 2014) evaluated the SWAT model favourably in the context of water balance simulation. For example, Obuobie (2008) applied the SWAT model in the WVB to simulate the water balance components and found a good agreement between simulated and observed annual discharge, surface runoff and baseflow with a coefficient of determination (R^2) and Nash-Sutcliffe model Efficiency (NSE) both greater than 0.80. Other studies, such as Awotwi *et al.* (2015), also confirmed that the SWAT model was able to simulate reliably the hydrology of the WVB, hence the use of SWAT in our study.

Fresh water availability and distribution have been declining over time partly due to changes in LULC and population growth. Studies such as Braimoh and Vlek (2004), Forkuor (2014), and Batuuwie (2015), have all reported substantial changes in LULC over recent years within the Volta basin, where the Veia catchment is located. The study by Batuuwie (2015) indicated that a significant portion of natural vegetation cover in the WVB, has been lost over the years partly due to human activities. Similarly, a study by Larbi *et al.* (2019) indicated the conversion of forest/mixed vegetation to cropland as the dominant LULC from 1990 to 2016 in the Veia catchment. Their projection of LULC predicted continuous expansion of cropland at the expense of forest/mixed vegetation with an estimated decrease of non-agricultural vegetation of 4.5% between 2016 and 2025, under business as usual scenario (Larbi *et al.* 2019). This unfavorable situation of LULC change has heightened the need for afforestation and the protection of forest reserves in most river basins in Ghana such as the Veia catchment. There is however a tradeoff between afforestation and surface water resources. For example, forest improves

water quality and enhances infiltration but uses more water, causing higher evapotranspiration and lower runoff (Yira *et al.* 2017). Hence, there is an urgent need for catchment scale water balance information since the changes in LULC have been shown to alter the hydrological processes of many river basins (Stonestrom *et al.* 2009, Mwangi *et al.* 2016). In the study region, although Awotwi *et al.* (2014) undertook a broader scale study of LULC change impact on water resources on the entire White Volta basin, little is known at the local scale (e.g. for a sub-catchment such as the Vea). The previous large scale study of LULC change impacts on water balance have used coarse resolution data for land use, digital elevation model (DEM) and soil, which may ignore or over-simplify landscape characteristics that relate to the hydrology of the Vea catchment. Having a higher resolution DEM and LULC data provides better details for drainage, slope and related land use types for small scale catchments. According to the study by Sivasena and Janga (2015), the accuracy of sub-catchments decreases with coarse resolution data, and this affects the generated runoff at the HRU level within each sub-catchment. There is also the issue of data scarcity and uneven distribution of climate stations in the catchment that hampers spatio-temporal studies of the various components of the water balance (Ibrahim *et al.* 2015). The issue of data scarcity is a challenge in Ghana, hence the need to rely on high-resolution satellite-based climate products for hydrological studies.

Moreover, in the Vea catchment there is a proposed initiative to increase the number of small dams or dugouts with the aim of ensuring all year round crop production. This initiative as a result may increase cropland area in the future and also affect other land use types, which would eventually alter the water balance of the catchment. Given the reviewed impacts of LULC change on hydrological processes in Ghana, the need for a detailed investigation of the Vea catchment water balance components cannot be overemphasized due to its accelerated land cover dynamics and its associated impacts on the hydrological processes. This study assessed the possible consequences of land use change scenarios (i.e. business as usual and afforestation, for the year 2025) compared to 2016 baseline, on the Vea catchment's water balance components (actual evapotranspiration, surface runoff, water yield and groundwater recharge) using the Soil and Water Assessment Tool (SWAT) model. The specific objectives of this study are to: (i) apply the SWAT model to simulate the water balance components of the data-scarce Vea catchment using both weather station and high-resolution (5km) gridded precipitation data; and (ii) estimate the impact of business-as-usual (BAU) and afforestation scenarios of land cover change on the water balance components. The BAU scenario deals with the projection of the LULC pattern based on expansion in cropland and grassland at the expense of forest/mixed vegetation, while the afforestation scenario deals with the by limiting cropland expansion into the forested areas and increasing natural vegetation (forest cover and grassland). The study provides information on the present water balance components of the catchment and the implication of different scenarios of LULC change on the future water resources which are relevant to decision makers for a sustainable management of the land and water resources of the Vea catchment.

143 **2 MATERIALS AND METHODS**

144 **2.1 Study area**

145 The Veia catchment, with an area of 306 km², is one of the three focal experimental
146 catchments of the West African Science Service Center on Climate Change and Adapted
147 Land Use (WASCAL); it is located within the White Volta basin (Figure 1). The Veia
148 catchment covers mainly the Bongo and Bolgatanga districts in the Upper East region of
149 Ghana and lies between latitudes 10°30' - 11°08' N and longitudes 0° 59' - 0° 45' W. The
150 catchment lies mainly in Ghana, with a small northern portion located in the south-central
151 part of Burkina Faso. The climate of the catchment is controlled by the movement of the
152 Inter-Tropical Discontinuity (ITD) that dominates the climate of the entire West African
153 region (Obuobie 2008). Located in a semi-arid agro-climatic zone, the catchment covers
154 three agro-ecological zones: the Savanna and Guinea Savanna zones in Ghana, and north
155 Sudanese Savanna zone in Burkina Faso (Forkuor 2014). It is characterized by a uni-
156 modal rainfall regime from April/May to October with a mean annual rainfall of 957 mm
157 which normally peaks in August, and a very high potential evapotranspiration with a
158 mean annual value ranging from 1650mm to 1950mm (Limantol *et al.* 2016, Larbi *et al.*
159 2018). It is characterized by fairly low relief with elevation ranging between 89 m and
160 317m (Figure 1) and mainly dominated by cropland followed by grassland interspersed
161 with shrubs and trees, and woodland (closed/open) (Figure 2 and Table 3). The dominant
162 soil type in the Veia catchment is lixisols (90%) while vertisols (8%) and cambisols (2%)
163 occur in relatively smaller proportions (Figure 2). The catchment also contains a
164 considerable number of wetlands and valleys, and contains the Veia dam and many small
165 dams (used for irrigation and animal watering) and wells/pumps, resulting in a complex
166 hydro-ecological system. Agriculture (rain-fed and irrigated), which includes the
167 cultivation of annual crops such as: beans, rice, sorghum, millet, and groundnuts is one
168 of the main sources of income for many of the rural people in the catchment. The
169 construction of the Veia irrigation project in the 1980s for irrigation farming and provision
170 of potable water to the surrounding communities has led to changes in LULC in the
171 catchment (Adongo *et al.* 2014).

172
173 **Figure 1** Location of the Veia catchment within the White Volta Basin, as well as the
174 topography, weather and hydrological measurement stations in the Veia catchment, after
175 Larbi *et al.* (2018).

176
177 **2.2 Data collection and preparation**

178 The SWAT model requires a Digital Elevation Model (DEM), daily
179 meteorological data, soil and land use/cover map and management as input data. The
180 characteristics of the datasets used for this study and their sources are listed in **Table 1**.
181 Meteorological observations for the Veia catchment were taken mainly from the
182 Bolgatanga and Veia climate stations maintained by WASCAL (Figure 1). Due to the
183 sparse distribution of climate stations throughout the catchment, daily precipitation data
184 from the Climate Hazards Group InfraRed Precipitation with Station (CHIRPS) data were

used to complement the observed data. CHIRPS combines 0.05° resolution satellite imagery with in-situ station data to create gridded rainfall time series (Funk *et al.*, 2015). The CHIRPS data have been demonstrated to reproduce well both the seasonal and annual rainfall pattern of the Veia catchment, with validation resulted in a very high correlation coefficient ($r = 0.99$), and a Nash–Sutcliffe efficiency of 0.9, indicating that the CHIRPS precipitation data can be employed in this study (Larbi *et al.* 2018). The CHIRPS daily precipitation data were extracted for the various grid locations within the Veia catchment (Figure 1). These gridded locations (Figure 1, right) were selected to represent the three agro-ecological zones namely; the Savanna zone (GRID3, GRID 4, GRID 5, GRID 6, GRID 7 and GRID 8), the Guinea Savanna (GRID 9, GRID 10, GRID 11 and GRID 12) and the north Sudanian Savanna zone (GRID 1 and GRID 2) in the study area (Larbi *et al.* 2018). Missing records (less than 10%) in the Veia and Bolgatanga stations data were filled with the CHIRPS precipitation data and the 0.5° resolution daily minimum and maximum temperature data from the NASA Langley Research Center (LaRC) POWER project (Stackhouse *et al.* 2018). The LULC map (Figure 2) was obtained from the maximum likelihood algorithm classification of Landsat image of the year 2016 with the details of the LULC classification found in Larbi *et al.* (2019). Tables 2 and Table 3 show the various LULC types and the associated statistics.

Figure 2 Land use/land cover (left), Soil (middle), and slope classes (right) maps of the Veia catchment. Lixisols (Lf1-1a), vertisols (Vc1) and cambisols (Bv2)

Table 1. Datasets used within the SWAT modelling of the Veia Catchment and their sources

Table 2. Land use/ land cover classification scheme used for the Veia Catchment after Larbi *et al.* (2019)

Table 3. Distribution of 2016 land use/cover classes within the Veia catchment (Larbi *et al.* 2019)

2.3 Hydrological Modelling

2.3.1 Hydrological components of SWAT Model

The SWAT model is an eco-hydrological model developed to simulate the quantity and quality of surface water and groundwater, and predict the environmental impact of land management practices, land use and climate change (Arnold *et al.* 1998, Cornelissen *et al.* 2013). SWAT is useful in modelling ungauged catchment and it simulates the catchment by first dividing it into sub-catchments, and then into homogenous units that consist of uniform land use, soil and slope characteristics called Hydrologic Response Units (HRUs) (Neitsch *et al.* 2005). In SWAT, the quantification of the hydrological cycle components is based on the water balance equation and is expressed mathematically as:

$$SW_t = SW_o + \sum_{i=1}^t (R_{day} - Q_{surf} - ET - W_{seep} - Lt_{flow} - Q_{gw}) \quad (1)$$

where SW_t is the final soil profile water content (mm); SW_o is the initial soil water content on day i (mm); R_{day} , Q_{surf} , ET , W_{seep} , Lt_{flow} and Q_{gw} are the daily amounts (mm) of rainfall, surface runoff, actual evapotranspiration, percolation, lateral flow, and the groundwater flow on day i , respectively. The water yield component, considered in this study consists of the contributions from surface runoff, lateral flow and groundwater flow to stream flow.

In this study, the Soil Conservation Service (SCS) curve number equation (SCSD, 1986) was used to compute the Q_{surf} SWAT. The Lt_{flow} which is the lateral movement of water in the soil profile was simulated using the kinematic storage model method of Sloan and Moore (Sloan and Moore 1984), which is based on mass continuity equation. The potential evapotranspiration (PET) in this study was estimated using the Hargreaves method (Hargreaves and Samani, 1985), which requires only air temperature as input data. The model then computes ET once PET is determined. The groundwater recharge to the shallow aquifer is simulated by SWAT using equation 2.

$$W_{rchg,sai} = (1 - \exp[-1/\delta_{gw}]) \cdot W_{seep} + \exp[-1/\delta_{gw}] \cdot W_{rchg,sai-1} \quad (2)$$

where $W_{rchg,sai}$ and $W_{rchg,sai-1}$ are the amount of recharge from the soil profile entering the shallow aquifer on day i and $i-1$ (mm); and δ_{gw} is delay time or drainage time (days).

The Vea catchment was delineated into 52 sub-catchments with an estimated total surface area of about 306 km² using the 30m DEM. The 2016 LULC map and soil map were used to define the HRUs of the catchment. The multiple HRUs definition option was used to further sub-divide the Vea catchment into 331 HRUs. The model was run for the period of 1990-2017; and the first three years (1990-1992) were used as model spin up period. For a detailed description of how SWAT model simulate the water balance components and the model setup, readers may refer to SWAT documentation by Neitsch *et al.* (2005), and SWAT user guide by Winchell *et al.* (2013).

2.3.2 Model sensitivity analysis, calibration and evaluation of prediction performance

The SWAT model sensitivity analysis, calibration and validation were performed via the interface of SWAT-CUP using the Sequential Uncertainty Fitting version 2 (SUFI-2) procedure (Abbaspour *et al.* 2009). The superior capability for calibration and uncertainty analysis has been demonstrated by various studies, e.g. Shawul *et al.* (2013), Abbaspour *et al.* (2009). The sensitivity analysis was performed by testing a total of 13 parameters (Table 5) based on previous studies (Obuobie, 2008; Guug, 2017) and SWAT documentation recommendations (Neitsch *et al.* 2011). The SWAT model for the Vea catchment was calibrated manually as well as automatically based on the available daily observed discharge data similar to studies such as Kankam-Yeboah *et al.* (2013), and Dos Santos *et al.* (2018). The calibration was performed for the period (May 2014 to November 2014 and June 2015 to November 2015), and validation for the period (July to November 2013) at the Sumbrungu gauge station (Figure 1). Due to the limited length of the time series, and gaps within the observed discharge data, manual calibration was performed first based on the authors and experts knowledge of the catchment in order to

ensure that the various water balance components were within reasonable and/acceptable ranges. Moreover, SWAT applications literature in the region was used to support the manual calibration (e.g. Obuobie 2008, Kankam-Yeboah *et al.* 2013, Guug, 2017). The manual calibration was performed for a limited number of parameters, including SCS runoff curve number (CN₂), soil evaporation compensation factor (ESCO), and baseflow alpha factor (ALPHA_BF), by changing one parameter at a time and re-running the model. This choice of parameters was based on previous SWAT model runs for the area (Guug 2017). Manual calibration was then followed by automatic calibration to further tune the parameters (Table 5) for the entire catchment. The performance of the SWAT model was evaluated using Nash-Sutcliffe model efficiency (NSE; Eq. 3), coefficient of determination (R²; Eq. 4) and percentage bias (PBIAS; Eq. 5). PBIAS measures the average tendency of the simulated values to be larger or smaller than the observed. The optimal value of PBIAS is 0.0, with low-magnitude values indicating accurate model simulation. Negative values indicate overestimation, whereas positive values indicate underestimation. NSE is a commonly used statistic proposed by Nash and Sutcliffe (1970) and ranges from 1 to -∞ with a value of 1 corresponding to an exact fit between modelled and measured data. The R² gives information about the goodness of fit between the simulated data and the measured data. It ranges from 0 to 1, with 1 being the best fit between the simulated and the observed data; typically values greater than 0.5 are considered acceptable (Santhi *et al.* 2001). The model performance was rated according to the performance ratings proposed by Moriasi *et al.* (2007), which indicated that a hydrological model can be considered satisfactory if NSE > 0.50, R² > 0.60, and PBIAS is within ±25% for streamflow.

$$NSE = 1 - \frac{\sum_{i=1}^n (O_i - P_i)^2}{\sum_{i=1}^n (O_i - \bar{O})^2} \quad (3)$$

$$R^2 = \left[\frac{\sum_{i=1}^N (O_i - \bar{O})(P_i - \bar{P})}{\left[\sum_{i=1}^N (O_i - \bar{O})^2 \right]^{0.5} \left[\sum_{i=1}^N (P_i - \bar{P})^2 \right]^{0.5}} \right]^2 \quad (4)$$

$$PBIAS = \frac{\sum_{i=1}^n (O_i - P_i)}{\sum_{i=1}^n (O_i - \bar{O})} \times 100 \quad (5)$$

In these equations O_i are the measured discharge data; P_i are the simulated discharge data, whereas \bar{O} and \bar{P} are the mean of the measured and simulated data, respectively.

2.4 Land cover change scenarios and water balance impact assessment

The 2016 LULC map and the two LULC change scenarios (BAU and afforestation) (Figure 3) used in this study were produced by Larbi *et al.* (2019). The 2016 LULC map was based on Maximum Likelihood algorithm classification of the 30m resolution Landsat image with an overall accuracy of 88%. This was adopted as a baseline in order to understand and obtain information on the current hydrological status at the Ve a catchment. The two scenarios maps were produced using the Markov chain in the Land Change modeller. The Markov chain calculates how much land transition occurs from one class to another from time t_0 to t_1 in each transition based on the historical rate of LULC changes that occurred (Eastman 2006, Olmendo *et al.* 2015). Based on the most

dominant transitions (grassland to cropland, forest/mixed vegetation to cropland, and forest/mixed vegetation to grassland) that occurred at the Veia catchment between the period 1990 and 2016, the transition potential maps were produced using the Multi-Layer Perceptron (MLP) neural network algorithm at an accuracy rate of 85% (Larbi *et al.* 2019). The BAU scenario map was produced based on the probability matrix generated from the transition potential maps. In the case of afforestation scenario, the probability matrix for the forest/mixed vegetation, grassland and cropland were modified based on the definition of the afforestation scenario, while the other LULC types were assumed to be maintained till the 2025. Table 4 shows the statistics for the 2016 LULC map and projections for the two LULC scenarios. Under the BAU scenario, cropland and grassland areas are projected to increase in the year 2025 by 1.5% and 6.5%, respectively, while forest/mixed vegetation shows a decrease of 4.5%. Under the afforestation scenario, the forest/mixed vegetation and grassland showed an increase of 5.4% and 14.3%, respectively, while cropland decreased by 20%. Detailed information on the 2016 LULC mapping, LCM validation and the two land-use scenarios are available in Larbi *et al.* (2019).

After calibration and validation of the SWAT model using the 2016 LULC map, the impacts of the two LULC change scenarios on the water balance components were simulated by driving the calibrated SWAT model with the 2025 BAU and afforestation scenarios LULC datasets. The SWAT model was run for each scenario using the climate for the period 1993-2017, and the results under each scenario was compared to the corresponding water balance components (actual evapotranspiration, water yield and groundwater recharge) values for the 2016 LULC condition.

Table 4. Current and 2025 LULC area statistics (in km²) in the Veia catchment

Figure 3 The baseline and 2025 LULC change scenarios maps of the Veia catchment (Larbi et al. 2019)

3 RESULTS AND DISCUSSION

3.1 Sensitivity, calibration and validation of SWAT model

A total of 13 parameters were selected and presented together with their final fitted values for the stream flow simulation with the SWAT model (Table 5). Generally, hydrological models are sensitive to parameters related to soil, weather, vegetation, land management, and channels properties (Arnold *et al.*, 2000). The average slope steepness (HRU_SLP), SCS runoff curve number (CN₂), baseflow alpha factor (ALPHA_BF), soil evaporation compensation factor (ESCO) and the threshold water depth in the shallow aquifer for return flow to occur (GWQMN) emerged as the most sensitive parameters for the Veia catchment. Similar results were reported by a number of studies in the same region using the SWAT model (Obuobie, 2008; Kankam-Yeboah *et al.* 2013; Guug, 2017). The comparison between the observed and simulated daily stream flows for the SWAT model

calibration (2014 – 2015) and validation (2013) periods are shown in Figure 4 and Figure 5, respectively. The values for R^2 and NSE for the calibration period were 0.75 and 0.69 respectively, whereas for the validation periods 0.71 and 0.62 were found respectively. The obtained PBIAS results for the calibration (10.3%) and validation (-18.5%) of the SWAT model is in line with the range for model satisfaction proposed by Moriasi *et al.* (2017) indicating that, a hydrological model can be considered as satisfactory if $NSE > 0.50$, $R^2 > 0.60$, and PBIAS is within $\pm 25\%$ for streamflow. The obtained modelling statistics results are also in line with calibration results of previous SWAT modelling studies at the study region (e.g. Obuobie, 2008; Kankam-Yeboah *et al.* 2013, Awotwi *et al.* 2014). In addition, the hydrological balances produced by the SWAT model in this study are close to values found for small Sudanian catchments in the study region (Oguntunde, 2004, Martin 2005, Ibrahim *et al.* 2015). The obtained modelling statistics results therefore provide a reasonable support for the model's ability to describe water balance components of the Veia catchment.

Table 5. Input parameters and bounds, sensitivity ranking and calibrated values by the SWAT model for the Veia catchment

Figure 4 Simulated vs. Observed daily discharge for *calibration* period (2014-2015) at Sumbrungu gauge station, Veia Catchment

Figure 5 Simulated vs. Observed daily discharge for *validation* period (2013) for Sumbrungu gauge station, Veia Catchment

3.2 Mean annual and monthly water balance components analysis

The mean annual simulated water balance components from the baseline model run over the period 1993-2017, as a proportion of the mean annual rainfall, are shown Figure 6. The results show that 74.3% of the mean annual rainfall (954 mm) is lost to ET in the catchment during the model simulation period (1993-2017). The water yield (WYLD) which consist of surface runoff, groundwater flow and lateral flow constitutes about 13.5% of the rainfall (128 mm), of which Q_{surf} accounts for 8.6%, while Q_{gw} and L_{tflow} accounts for 3.4% and 1.4%, respectively. The recharge to the shallow aquifer ($W_{rchg,sa}$) is simulated to be 12.1% (115 mm). The results obtained from this study are also in line with other previous studies such as Martin, 2005; Friesen *et al.*, 2005; Obuobie, 2008; Guug, 2017. For example, a very high actual evapotranspiration (ET) within the range of 73-75%, runoff in the range of 10-17% and shallow aquifer recharge (7-13%) for the year 2003 were obtained by a study conducted by Martin (2005) using a simple spreadsheet-based soil water balance method for Atankwidi catchment (a 275 km² sub-catchment of the White Volta in northern Ghana) which is adjacent to the Veia catchment. Similarly, Ibrahim *et al.* (2015) determined the water balance for the Veia catchment, from water budget modeling using the GR2M model, for the period 1970–2000 and found that about

74.6% of the mean annual rainfall (980mm) constitutes actual evapotranspiration, with runoff and recharge constituting 11.9% and 12.9% of the annual rainfall, respectively.

In terms of mean monthly distribution of the simulated water balance components (Figure 7), it was found that potential evapotranspiration (PET) exceeds rainfall in most of the months except July, August and September, which record the highest monthly rainfall of 173 mm, 266mm and 175mm, respectively. The ET increases steadily as rainfall increases during the season and decreases as the season approaches the dry season. During the first 6-9 weeks from the rainfall onset month (April), the model simulates rainfall being entirely partitioned to by ET and the replenishment of soil moisture storage. The surface runoff therefore becomes important only after this first period of approximately 2 months; it peaks together with the water yield in the month of August when the rainfall is highest. It is worth mentioning that the wet season is from May to October but the water yield extends to December due to groundwater baseflow (also see Guug, 2017).

3.3 Water balance components distributions for the different land use/land cover types

The analysis of simulated mean annual water balance components, at the catchment scale, under different land use/cover types show that the lowest average annual Q_{surf} is from forest/mixed vegetation, whereas the highest values occur on grassland followed by cropland (Table 6). Grassland which covers about 26.9% of the catchment, has a mean annual Q_{surf} of 100.3mm, followed by cropland with a Q_{surf} of 88.5 mm, whereas the lowest Q_{surf} of 56.2mm is found for forest/mixed vegetation. For cropland and grassland this is equivalent to ~ 10% of the rainfall, whereas for forest/mixed vegetation it is only ~ 6%. The actual evapotranspiration (ET) is simulated to be between 73-74% of rainfall, i.e. the differences between the 3 land uses are virtually negligible. The contribution of Q_{gw} to streamflow is simulated to be relatively high in forest/mixed vegetation (7.7%), follow by cropland (5.6%) but low in grassland (4%).

Table 6. Mean annual water balance components simulated by SWAT under different land use/cover types at catchment scale

3.4 Water balance components changes under land use scenarios

The SWAT simulated mean monthly and annual water balance components for the period 1990-2017 under the two LULC scenarios (BAU and afforestation) were compared with those simulated for the 2016 LULC (baseline run) to explore their temporal (Table 7) and spatial pattern (Figure 9) in the Ve a catchment. At annual scale under BAU scenario described in section 2.4, the mean annual surface runoff, water yield and groundwater recharge increased by 18.7%, 9.1% and 15.3% respectively and ET decreased by 2.7% (Table 7). In contrast, the opposite impact on ET occurred under the afforestation

scenario, which showed a slight increase in ET by 0.6%, whereas surface runoff and water yield decreased by 19.6% and 18% respectively, while groundwater recharge increased by 28.1%. At the monthly scale, for the BAU scenario, the ET decreased by 4.9% in the rainy season months (May-Oct.) and Q_{surf} and WYLD increased by 18.6% and 8.7% respectively (Figure 8). Similarly, the afforestation scenario shows a 7.8% decrease in ET, 23.1% decrease in Q_{surf} and 19.1% decrease in WYLD but an increased recharge by 21.4% in the peak period of the rainfall season (July-Sept). At the spatial scale under the BAU scenario as shown in Figure 9, the ET shows a decrease in most part of the catchment (Figure 9b), but water yield (Figure 9h) and surface runoff especially at the central part of the catchment (Figure 9d-9f) increased. Under afforestation scenario, ET increased in the north-central part of the catchment (Figure 9c) and surface runoff decreased at the southern and northern parts (Figure 9f). The water yield decreased considerably in the entire catchment with the highest value of 197mm (Figure 9i) while groundwater recharge increase occurred at the northern part of the catchment would occur (Figure 9L).

Table 7. Mean annual water balance components under 2016 and 2025 LULC change scenarios over the simulated period (1993-2017)

Figure 8 Mean monthly water balance components under different scenarios of land use change

Figure 9 SWAT Simulated mean annual water balance components under BAU and afforestation scenarios of land use change relative to the baseline (2016) LULC map

The Curve number (CN) method is used by the SWAT model to compute the surface runoff for each land use. From Table 5, the curve number for cropland, grassland and forest are 72.5, 73.5 and 69 respectively with an average catchment curve number of 71.5. Therefore, grassland had the highest surface runoff at the catchment based on the curve number, followed by cropland and forest/mixed vegetation. The conversion from cropland to forest/mixed vegetation would lead to a decrease in curve number at that area hence a decrease in surface runoff under afforestation scenario. Surface runoff constitute about 63% of the water yield, hence a subsequent decrease in water yield under afforestation scenario. On the other hand, when forest is converted to cropland and grassland under BAU scenario, the curve number for the area where the conversion took place would increase which would lead to an increase in surface runoff and water yield.

The plant canopy influences infiltration, surface runoff and evapotranspiration under the different land use types. When computing surface runoff in SWAT, the SCS curve number method lumps canopy interception in the term for initial abstraction. The maximum amount of water that can be held on the canopy for subsequent evaporation (interception) is a function of the leaf area index (LAI). According to Chen and Black (1992), LAI is an important modulator of ET and groundwater recharge. The maximum

LAI (BLAI) values (Table 5) for forest/mixed vegetation, cropland and grassland for the Vea catchment as simulated by the SWAT model are 5, 3 and 2.5 m² m⁻², respectively, indicating higher interception in forest followed by cropland and grassland.

Higher ET occurred in forest/mixed vegetation (720mm/yr), followed by cropland (700.5mm/yr) and grassland (698.8mm/yr) as shown in Table 6. This is because ET is partly dependent on transpiration, which is directly proportional to the surface area of leaves (equivalent to the LAI) from which water vapour is released. According to Adane *et al.* (2018), the conversion from cropland to forest/mixed vegetation leads to increased rooting depth, and greater leaf area index, which together alter the water budget considerably. Hence under the afforestation scenario, we would expect the actual evapotranspiration to increase and while the opposite would occur under BAU scenario.

Rooting depth determines the maximum depth from which plants can access moisture in the soil profile and it has substantial influence on groundwater recharge and actual evapotranspiration. In SWAT, the maximum rooting depth (RDMX) values for each land use type were 3 m for forest/mixed vegetation, 1 m for grassland and cropland (Table 5). Under both scenarios of land use change, groundwater recharge increased: in the BAU scenario, this occurred because although there was more surface runoff, the increased area of grassland and cropland meant lower ET. In the afforestation scenario, there was a greater infiltration rate which outweighed the increased ET. In addition, automatic calibration of the SWAT model indicated that water loss at the catchment was more influenced by evaporation than transpiration as indicated by the coefficients of plant uptake and soil evaporation compensation factors which were found to be 0.02 and 0.42 respectively (Table 5). This means that the evaporation process is sustained from deeper soil layers, through capillary rise, whereas the transpiration only receives very little contribution from the deeper soil layers. The dominant soil type in the Vea catchment are *lixisols* (90%); these are soils with subsurface accumulation of mainly kaolinitic clays, whereas approximately 8% of the catchment is characterized by the presence of *vertisols* (dominated by *montmorillonite* clays). Both clay types will allow for capillary rise to sustain the evaporation processes, but their water holding capacities are poor, and *vertisols* display pronounced cracking and swelling, which would negatively affect the transpiration process. This explains the pronounced increase in recharge under afforestation scenario.

The decreased ET was due to the conversion of forest/mixed vegetation to cropland (see Table 7, where ET for cropland is marginally smaller than for the other two land uses). Zhang *et al.* (2012) indicated that a decrease in forest cover reduces ET from both canopy interception and plant transpiration. The results obtained for water yield under the BAU (+9.1%) and afforestation (-18%) scenarios are in accordance with other studies such as those by De Moraes *et al.* 2006; Coe *et al.* 2009, and Dos Santos *et al.* 2018. For example, in the Goseng catchment, Nugroho *et al.* (2013) found that surface runoff and water yield (total runoff) increased due to a decrease in vegetation cover. Similarly, other studies such as those by Bewket and Sterk (2005) and Costa *et al.* (2003) have confirmed that LULC

change such as the conversion of forest to agriculture and urban areas can increase the rates of Q_{surf} and groundwater recharge. According to the studies by Andréassian *et al.* (2004) and (Brauman *et al.* 2007), a reduced forest coverage leads to an increase in annual flow, flood peaks and flood volume. Warburton *et al.* (2012) also noticed that the expansion of forest and shrub cover reduces catchment water yields and increases storage capacity, which confirms the increase in recharge obtained in this study under afforestation scenario. Similarly, López-Moreno *et al.* (2013) showed that an increase in forest cover in the Upper Aragón River basin caused a decrease in annual streamflow by 16%. Indeed, our results also indicated that within the baseline model run, lower surface runoff was simulated under forest/mixed vegetation (5.8%) compared to cropland (9.3%) and grassland (10.5%) which covers greater part of the study area.

The increased forest cover (conversion of cropland to forest/mixed vegetation) under afforestation scenario would eventually lead to an increase in evapotranspiration due to the increase in water consumption by the trees which increases plant transpiration (Oliveira *et al.* 2018). Also, the surface runoff and water yield decreased while recharge increased because trees function as a media of water infiltration enhancement into the soil through the process of temporary detention of rainwater by interception, stemflow, and throughfall which increases the water storage (Nugroho *et al.* 2013). As noted by Li *et al.* (2018), a naturally vegetated land has relatively lower water yield coefficients due to higher rates of water infiltration. According to Mwangi *et al.* (2016), the ground surface roughness increases when forest/mixed vegetation increases, and this also accounts for an enhanced infiltration and a decrease in surface runoff generation. Moreover, afforestation leads to a reduction of the peak flows over the hydrological year, since it increases the infiltration capacity and the effective root zone, thus, increasing storage capacity (Wiekenkamp *et al.* 2016; Lamparter *et al.* 2018).

4 CONCLUSION

The Soil and Water Assessment Tool (SWAT) was configured for the Vea catchment to study the water balance components under business-as-usual (BAU) and afforestation scenarios of land use by forcing the SWAT model with both station and gridded precipitation, and other climatic driving data. The study found that about 74% of the rainfall received at the catchment is converted into actual evapotranspiration, and the remaining is shared between the other components of the water balance. This partitioning is consistent across the three main land use types. **The magnitude of the LULC change impact on the water balance components varied, with the greatest difference between the two scenarios found for surface runoff. The changes in land use played an important role in the water balance, indicated by an increased water yield and surface runoff under the BAU scenario; these were decreased under the afforestation scenario. The conversion from cropland to forest/mixed vegetation would lead to a decrease in curve number in that area hence a decrease in surface runoff and water yield under afforestation scenario. On the other hand, the BAU scenario would lead to an increase in catchment curve number, hence increased surface runoff and water yield. The study also found that ET**

increased under afforestation scenario but decreased under BAU scenario due to higher leaf area index of forest/mixed vegetation which is equivalent to the surface area of leaves from which moisture can be released (either from an intercepted pool of stored water on the leaves, just after rainfall, or via transpiration when leaves are dry). In addition, it was found that water loss at the catchment was more influenced by evaporation than transpiration (due to the physical properties of the lixisols and vertisols in this area), hence the pronounced increased in recharge under afforestation scenario. From an ecosystem service perspective, the increased water yield due to cropland and grassland expansion would contribute to the blue water available for consumption but would increase soil erosion and flood risks during storms. The increase in groundwater recharge under both scenarios of LULC change, especially under afforestation scenario, would increase the availability of groundwater resources for different usages in the catchment. The insights acquired in this study provide a useful reference relating to the important role of land use change in water resources planning and the need for stakeholders and policy makers to consider practical trade-offs between changes in water balance components and other benefits of afforestation in the small scale Veia catchment.

Acknowledgments This paper was extracted from Larbi’s Doctoral research study undertaken at Universite D’Abomey Calavi, Benin. His sincere appreciation goes to the Federal Ministry of Education and Research (BMBF) and West African Science Centre on Climate Change and Adapted Land Use (WASCAL; www.wascal.org) for providing the scholarship and financial support for this programme. Verhoef and Macdonald contribution was supported by the BRAVE project (Building understanding of climate variability into planning of groundwater supplies from low storage aquifers in Africa), funded under the NERC/DFID/ESRC UPGro Programme (NE/M008983/1 and NE/M008827/1). David Macdonald publishes with the permission of the Executive Director, British Geological Survey.

Conflicts of Interest: The authors declare no conflict of interest.

REFERENCES

Abbaspour, K. C. et al. 2009. Assessing the impact of climate change on water resources in Iran. *Water resources research*, 45.

Abbaspour, K.C. 2008. *SWAT Calibration and Uncertainty Programs—A User Manual*; Department of Systems Analysis, Integrated Assessment and Modeling (SIAM), Eawag, Swiss Federal Institute of Aquatic Science and Technology: Duebendorf, Switzerland.

Adanea, Z. A. et al. 2018. Impact of grassland conversion to forest on groundwater recharge in the Nebraska Sand Hills. *Journal of hydrology: Regional studies*, 15, 171-183.

Adongo, T. A. et al. 2014. Siltation of the Reservoir of Veia Irrigation Dam in the Bongo District of the Upper East Region, Ghana. *International Journal of Science and Technology*, 2224-3577

- Andréassian, V. 2004. Waters and forests: From historical controversy to scientific debate. *J. Hydrol.*, 291, 1–27.
- Arnold, J. G. and Allen, P. M. 1993. Bernhardt, G. A comprehensive surface-groundwater flow model. *Journal of hydrology*, 142, 47–69.
- Arnold, J. G. et al. 1998. Large-area hydrologic modeling and assessment: Part I. Model development. *J. American Water Resour. Assoc.*, 34(1): 73-89.
- Arnold et al. 2000. Regional estimation of base flow and groundwater recharge in the Upper Mississippi River basin. *Journal of Hydrology* **227**: 21–40. DOI:10.1016/S0022-1694(99)00139-0.
- Awotwi, A. et al. 2015. Predicting hydrological response to climate change in the White Volta catchment, West Africa. *Journal of Earth Science & Climatic Change*, 6, 1–7, doi:10.4172/2157-7617.1000249.
- Awotwi, A., Yeboah, F., and Kumi, M. 2014. Assessing the Impact of Land Cover and Climate Changes on Water Balance Component in White Volta Basin. *Water and Environment journal*, doi:10.1111/wej.12100
- Baatuuwie, B.N. 2015. *Multi-dimensional approach for evaluating land degradation in the savanna belt of the White Volta basin*. PhD dissertation, KNUST, Ghana.
- Bansode, S. and Patil, K. 2016. Water Balance Assessment using Q-SWAT. *International Journal of Engineering Research*, Volume, 515–518.
- Bewket, W., and Sterk, G. 2005. Dynamics land cover and its effect on the stream flow on the Chemoga catchment in the Blue Nile basin, Ethiopia. *Hydrol. Process.*, 19, 445-458.
- Bhaduri, B. et al. 2000. Assessing catchment-scale, long-term hydrologic impacts of land use change using a GIS-NPS model, *Environ. Management*, 26(6), 643-658.
- Bossa, A. Y. et al. 2014. Scenario-based impacts of land use and climate change on land and water degradation from the meso to regional scale. *Water*, 6, 3152–3181, doi:10.3390/w6103152.
- Braimoh, A.K. and Vlek, P.L.G. 2004. Land-cover change analyses in the Volta Basin of Ghana. *Earth Interactions*, 8, p.21.
- Brauman, K.A. et al. 2007. The nature and value of ecosystem services: An overview highlighting hydrologic services. *Annu. Rev. Environ. Resour.*, 32, 67–98.
- Chen, J.M. and Black, T.A. 1992. Defining leaf area for non-flat leaves. *Plant, Cell and Environment* 15, pp. 421-429.
- Coe et al. 2009. The influence of historical and potential future deforestation on the stream flow of the Amazon River—Land surface processes and atmospheric feedbacks. *J. Hydrol.*, 369, 165–174.
- Costa, M. H. et al. 2003. Effects of large-scale changes in land cover on the discharge of the Tocantins River, Southeastern Amazonia. *Journal of Hydrology*, 283: 206–217.
- Dewitte, O. et al. 2013. Harmonisation of the soil map of Africa at the continental scale. *Geoderma* 211, 138–153.
- Doerr, S. H. et al. 2000. Soil water repellency: its causes, characteristics and hydro geomorphological significance, *Earth-Sci. Rev.*, 51, 33–65.

- 647 Dos Santos et al. 2018. Hydrologic Response to Land Use Change in a Large Basin in
648 Eastern Amazon. *Water*, MDPI, 10 (4), pp.429, 10.3390/w10040429.halshs-
649 01758828
- 650 De Moraes et al. 2006. Water storage and runoff processes in plinthic soils under forest
651 and pasture in Eastern Amazonia. *Hydrol. Process.* 20, 2509–2526.
- 652 Eastman, R.J. 2006. *IDRISI Andes, guide to GIS and image processing*. Clark University,
653 Worcester, pp.87-131.
- 654 Forkuor, G. 2014. *Agricultural Land Use Mapping in West Africa Using Multi-sensor
655 Satellite Imagery*. PhD dissertation, Julius-Maximilians-Universität Würzburg
- 656 Friesen, J. et al. 2005. Storage capacity and long-term water balance of the Volta Basin,
657 West Africa. *IAHS Publication*, 296,138-145
- 658 Funk, C. et al. 2015. The climate hazards infrared precipitation with stations—a new
659 environmental record for monitoring extremes. *Scientific Data* 2, 150066.
660 doi:10.1038/sdata.2015.66 2015.
- 661 Gassman, P. W. et al. 2007. The soil and water assessment tool: historical development,
662 applications, and future research directions. *Transactions of the ASABE*, 50,
663 1211–1250.
- 664 Ghoraba, S. M. 2015. Hydrological modeling of the Simly Dam catchment (Pakistan)
665 using GIS and SWAT model. *Alexandria Engineering Journal*, 54, 583–594.
- 666 Guug, S. 2017. *Modelling Water Balance and Availability with Swat Hydrological Model
667 of the Sherigu catchment in the Upper Region of Ghana. Master's MSc Thesis,*
668 *I*, 1–110.
- 669 Hargreaves, G., and Samani Z. A. 1985. Reference crop evapotranspiration from
670 temperature, *Applied engineering in agriculture* 1: 96–99.
- 671 Ibrahim B. et al. 2015. Hydrological predictions for small ungauged watersheds in the
672 Sudanian zone of the Volta basin in West Africa *Journal of Hydrology: Regional
673 Studies* 4 (2015) 386–397
- 674 Jones, J. R. et al. 2015. Temporal variability of precipitation in the Upper Tennessee
675 Valley. *Journal of Hydrology: Regional Studies*, 3, 125–138.
- 676 Kankam-Yeboah, K. et al. 2013. Impact of climate change on streamflow in selected river
677 basins in Ghana. *Hydrological sciences journal*, 58, 773–788,
678 doi:10.1080/02626667.2013.782101.
- 679 LAMPARTER, G. et al.2018. Modelling hydrological impacts of agricultural expansion
680 in two macro-catchments in Southern Amazonia, Brazil. *Regional
681 Environmental Change*, v. 18, n. 1, p. 91-103.
- 682 Larbi, I. et al. 2018. Spatio-Temporal Trend Analysis of Rainfall and Temperature
683 Extremes in the Veia Catchment, Ghana. *Climate*, 6, 87; doi:10.3390/cli6040087
- 684 Larbi, I. et al. 2019. Predictive Land use change under business as usual and afforestation
685 scenarios in the Veia Catchment, West Africa, *International Journal of
686 Advanced Remote Sensing and GIS*, 7, Volume 8, Issue 1, pp. ISSN 2320 –
687 0243, DOI: <https://doi.org/10.23953/cloud.ijarsg.416>.
- 688 Li et al. 2018. Impacts of Land-Use and Land-Cover Changes on Water Yield: A Case
689 Study in Jing-Jin-Ji, China. *Sustainability*, 10, 960.

- Limantol, A. M. et al. 2016. Farmers' perception and adaptation practice to climate variability and change: a case study of the Veia catchment in Ghana. *SpringerPlus*, 5, 830, doi:10.1186/s40064-016-2433-9.
- López-Moreno, J.I., et al. 2013. Impact of climate and land use change on water availability and reservoir management: Scenarios in the Upper Aragón River, Spanish Pyrenees. *Science of the Total Environment* 493, 1222–1231. doi.org/10.1016/j.scitotenv.2013.09.031
- Mango L. M. et al. 2010. Land use and climate change impacts on the hydrology of the upper Mara River Basin, Kenya: results of a modeling study to support better resource management. *Hydrol Earth Syst Sci*, 15: 2245–2258.
- Martin, N. 2005. *Development of a water balance for the Atankwidi catchment, West Africa - A case study of groundwater recharge in a semi-arid climate*. Doctoral thesis. University of Göttingen
- Mohamed, E. R. 2010. Impacts and Implications of Climate Change for the Coastal Zones of Egypt. Delta., 31–50.
- Moriasi, D.N. et al. 2007. Model evaluation guidelines for systematic quantification of accuracy in catchment simulations. *Trans. ASABE*, 50 (3), 885–900.
- Mwangi, H.M. et al. 2016. Modelling the impact of agroforestry on hydrology of Mara River Basin in East Africa. *Hydrological Processes*, 30(18), 3139-3155. <https://doi.org/10.1002/hyp.10852>
- Nash, J. E. and Sutcliffe, J.V. 1970. River Flow forecasting through conceptual models. Part I: A discussion of principles. *J. Hydrol.*, 10:282-290
- Neitsch, S. L. et al. 2011. *Soil and water assessment tool theoretical documentation version 2009*; Texas Water Resources Institute
- Neitsch, S., Arnold, J., Kiniry, J., and Williams, J. 2005. Soil and Water Assessment Tool theoretical documentation - version 2005. *Grassland, Soil & Water Research Laboratory, Agricultural Research Service, and Blackland Agricultural Research Station, Temple, TX*, 1–12.
- Nugroho et al. 2013. Impact of land-use changes on water balance. *Procedia Environmental Sciences*, 17, 256 – 262.
- Obuobie, E. 2008. *Estimation of groundwater recharge in the context of future climate change in the White Volta River Basin*. PhD dissertation, Rheinische Friedrich Wilhelms Universität, Bonn/ Germany.
- Oguntunde, P., 2004. Evapotranspiration and complimentary relations in the water balance of the Volta Basin: field measurements and GIS-based regional estimates. In: PhD Thesis, Ecology and Development Series No. 22. Cuvillier Verlag, Göttingen http://www.zef.de/fileadmin/webfiles/downloads/zefceecology_development/ecol_dev_22_text.pdf
- Oliveira, V.A. et al. 2018. Land-use change impacts on the hydrology of the upper grande river basin, Brazil. *CERNE*, v. 24, n. 4, p. 334-343.
- Olmedo, et al. 2015. Comparison of simulation models in terms of quantity and allocation of land change. *Environ. Model. Softw*, 69, pp.214-221.
- Palazzoli, I. et al. 2015. Impact of prospective climate change on water resources and crop yields in the Indrawati basin, Nepal. *Agricultural Systems*, 133, 143–157.

- Santhi, C. et al. 2001. Validation of the swat model on a large river basin with point and nonpoint sources. *JAWRA Journal of the American Water Resources Association*, 5, 1169–1188.
- Schulze, J., and Abbaspour, K. C. 2007. Using monthly weather statistics to generate daily data in a SWAT model application to West Africa. *Ecological modelling*, 201, 301–311.
- Shawul, A. A., Alamirew, T., and Dinka, M. O. 2013. Calibration and validation of SWAT model and estimation of water balance components of Shaya mountainous catchment, Southeastern Ethiopia. *Hydrology and Earth System Sciences Discussions*, 13955–13978.
- Sivasena, A. R and Janga, M. R. 2015. Evaluating the influence of spatial resolutions of DEM on watershed runoff and sediment yield using SWAT. *J. Earth Syst. Sci.* 124, No. 7, pp. 1517–152
- Sloan, P.G. and Moore, I.D. 1984. Modelling subsurface stormflow on steeply sloping forested watersheds. *Water Resour. Res.*, 20, 1815–1822.
- Soil Conservation Service Engineering Division (SCSD). 1986. *Urban Hydrology for Small Watersheds*; Technical Release 55; U.S. Department of Agriculture: Washington, DC, USA.
- Stackhouse, P. W. et al. 2018. POWER Release 8 (with GIS Applications) Methodology (Data Parameters, Sources, & Validation) Documentation (Data Version 8.0.1) <https://power.larc.nasa.gov/data-access-viewer/>
- Stonestrom, D. A., Scanlon, B. R., and Zhang, L. 2009. Introduction to special section on Impacts of Land Use Change on Water Resources. *Water Resour. Res.*, 45, W00A00, doi:10.1029/2009WR007937.
- Tang, Z. et al. 2005. Forecasting land use change and its environmental impact at a catchment scale, *J. Environ. Manage.*, 76, 35-45.
- Vilaysane, B. et al. 2015. Hydrological stream flow modelling for calibration and uncertainty analysis using SWAT model in the Xedone river basin, Lao PDR. *Procedia Environmental Sciences*, 28, 380–390.
- Wang, N. L. et al. 2015. Variations of the glacier mass balance and lake water storage in the Tarim Basin, northwest China, over the period of 2003–2009 estimated by the ICESatGLAS data. *Environ. Earth Sci.*, 74, 1997–2008.
- Warburton M.L, Schulze R.E., and Jewitt G.P.W. 2012. Hydrological impacts of land use change in three diverse South African catchments. *J Hydrol*; 414–415:118–35.
- Wei, X. H., Liu, W. F., and Zhou, P. C. 2013. Quantifying the Relative Contributions of Forest Change and Climatic Variability to Hydrology in Large Catchments: A Critical Review of Research Methods. *Water*, (5) 728-746.
- WIEKENKAMP, I. et al. 2016 Spatial and temporal occurrence of preferential flow in a forested headwater catchment, *Journal of Hydrology*, v. 534, n. 1, p. 139-149.
- Winchell, M., Srinivasan, R., Di Luzio, M., and Arnold, J. 2013. Arcswat Interface for Swat 2012; User Guide. Temple, Texas: Agricultural Experiment Station and Agricultural Research Service, US Department of Agriculture.

- 1
2
3 776 Yin, Z. et al. 2016. Assessing variation in water balance components in mountainous
4 777 inland river basin experiencing climate change. *Water*, 8, 472, doi:
5 778 10.3390/w8100472.
6
7 779 Yira, Y. et al. 2017. Modeling land use change impacts on water resources in a tropical
8 780 West African catchment (Dano, Burkina Faso). *J. Hydrol.* 537, 187–199.
9 781 doi:<https://doi.org/10.1016/j.jhydrol.2016.03.052>
10
11 782 Zhang, L., Zhao, F.F., and Brown, A.E. 2012. Predicting effects of plantations expansion
12 783 on streamflow regime for catchments in Australia. *Hydrology and Earth System*
13 784 *Sciences* 16: 2109-2121.
14
15 785 Zhang, S. et al. 2008. Recent changes of water discharge and sediment load in the
16 786 Zhujiang (Pearl River) Basin, *China. Glob Planet Chang*, 60, 365-380.
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

Table 1. Datasets used within the SWAT modelling of the Veia Catchment and their sources

S/N	Data type	Description	Source
1	DEM	30m digital elevation model for delineation of the catchment boundary, stream networks and sub-catchments.	Shuttle Radar Topography Mission (SRTM) http://earthexplorer.usgs.gov/
2	Climate	Daily rainfall (mm), maximum and minimum temperature (°C) from 1990-2017.	Ghana Meteorological Agency, WASCAL Veia catchment, CHIRPS and NASA POWER
3	Hydrological	Daily discharge data from 2013-2015 from Sumbrugu river gauging station for calibration and validation of SWAT model.	WASCAL Veia catchment
4	Soil map/properties	10km soil map, Soil texture and physical properties such as: bulk density, hydrological group, available water content, hydraulic conductivity and organic matter content for two layers (30cm and 100cm) for the three soil types namely; lixisols (Lf1-1a), vertisols (Vc1) and cambisols (Bv2) in Figure 2.	CSIR-Soil Research Institute (Ghana), Harmonized World Soil Database (Dewitte <i>et al.</i> , 2013).
5	Land use/land cover map	LULC map of the year 2016	Landsat image classification (Larbi <i>et al.</i> 2019)

Table 2. Land use/ land cover classification scheme used for the Veia Catchment after Larbi *et al.* (2019)

LULC Categories	Description
Water bodies	Areas permanently covered with standing or moving water such as inland waters, water logged areas, wetlands, dams, dugouts, and streams.
Grassland	Mainly mixture of grasses and shrubs with or without scattered trees (<10 trees per hectare) areas covered with only grasses.
Built-Up areas	Areas of human settlements, roads, artificial surfaces etc.
Cropland	Areas used for crop cultivation (irrigated and rain-fed agriculture), harvested agricultural land and bare soil.
Forest/Mixed Vegetation	Areas with dense trees usually over 5m tall, riparian vegetation, shrub and trees.

Table 3. Distribution of 2016 land use/cover classes within the Vea catchment (Larbi *et al.* 2019)

LULC type	Redefined LULC according to SWAT database	SWAT Code	Area (km ²)	Area Coverage (%)
Cropland	Agricultural Land-Generic	AGRL	174.50	56.64
Grassland	Range Grass	RNGE	82.72	26.85
Built-Up Areas	Residential	URBN	1.67	0.54
Water Bodies	Range-Grasses	WATR	4.90	1.59
Forest/Mixed Vegetation	Forest Mixed	FRST	44.28	14.37

Table 4. Current and 2025 LULC area statistics (in km²) in the Vea catchment

LULC Class	Baseline 2016	2025 scenarios	
		BAU	Afforestation
Cropland	174.50 (56.6%)	177.04 (57.5%)	155.5 (51.3%)
Grassland	82.72 (26.8%)	88.06 (28.5%)	94.55 (31.3%)
Built-Up Areas	1.67 (0.5%)	1.67 (0.5%)	1.02 (0.5%)
Water Bodies	4.90 (1.6%)	4.90 (1.6%)	4.90 (1.6%)
Forest/Mixed Vegetation	44.28 (14.4%)	36.40 (11.8%)	46.66 (15.3%)

Note: The areas expressed as percentages areas of the total area are in brackets.

Table 5. Input parameters and bounds, sensitivity ranking and calibrated values by the SWAT model for the Vea catchment

Parameters	Definition	Lower/upper bounds	Calibrated values	Sensitivity Rank
HRU_SLP	Average slope steepness (m/m)	0.0-1.0	0.014	1
V_CN ₂ .mgt_AGRL	Curve number for cropland,	35-90	72.5	2
V_CN ₂ .mgt_RNGE	Curve number for grassland		73.5	
V_CN ₂ .mgt_FRST	Curve number for forest/mixed vegetation.		69.0	
V_ALPHA_BF.gw	Baseflow alpha factor (days)	0.0-1.0	0.02	3
V_ESCO.hru	Soil evaporation compensation factor	0.0-1.0	0.42	4
R_REVAPMN.gw	Threshold depth of water in shallow aquifer for revap to occur	0.0-1000	550	5
SLSUBBSN.hru	Average slope length (m)	10-150	121.9	6
V_GWQMN.gw	Threshold depth of water in the shallow aquifer for return	0.0-5000	2200	7

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

flow to occur (mm)				
R_EPCO.hru	Plant uptake compensation factor	0.0-1.0	0.02	8
V_GW_REVAP.gw	Groundwater “revap” coefficient.	0.02-0.2	0.02	9
V_GW_DELAY.gw	Groundwater delay (days)	0- 500	33	10
R_GW_SPYLD.gw	Specific yield of the shallow aquifer (m ³ /m ³)	0.0-0.4	0.003	11
SURLAG.bsn	Surface runoff lag time (days)	0.0-24	2	12
R_RCHRG_DP.gw	Deep Aquifer percolation coefficient	0.0- 1.0	0.25	13
BLAI_AGRL	Maximum LAI for cropland	0.5-10	3	
BLAI_RNGE	Maximum LAI for grassland	0.5-10	2.5	
BLAI_FRST	Maximum LAI for forest/mixed vegetation	0.5-10	5	
RDMX_AGRL	Maximum rooting depth (m) for cropland	0-4	1	
RDMX_RNGE	Maximum rooting depth (m) for grassland	0-4	1	
RDMX_FRST	Maximum rooting depth (m) for forest/mixed vegetation	0-4	3	

R: parameter value is multiplied by 1+given value; V: parameter value is replaced by the calibrated value

Table 6. Mean annual water balance components simulated by SWAT under different land use/cover types at catchment scale

LULC	rainfall (mm)	Q_surf (mm)	Q _{gw} (mm)	ET (mm)
Cropland	949.3	88.5(9.3%)	50.5 (5.6%)	700.5 (72.9%)
Forest/mixed vegetation	972.87	56.2(5.8%)	74.3 (7.7%)	720.1 (74.0%)
Grassland	951.45	100.3(10.5%)	37.9 (4.0%)	698.8 (73.4%)

NB: Percentage rainfall contribution between brackets

Table 7. Mean annual water balance components under 2016 and 2025 LULC change scenarios over the simulated period (1993-2017)

Water balance components	Baseline (2016)	BAU Scenario	afforestation scenario
Rainfall (mm)	954.5	954.5	954.5
Actual evapotranspiration, ET (mm)	709.5	689.8(-2.7%)	714 (+0.6%)
Surface runoff, Q_Surf (mm)	82.5	97.9(+18.7%)	66.3 (-19.6%)
Water yield, WYLD (mm)	128.4	140.3 (+9.1%)	105.1(-18.0%)
Groundwater recharge (mm)	115.1	132.8(+15.3%)	147.4 (+28.1)

NB: Values in brackets indicate percentage change in water balance component relative to the baseline for each scenario

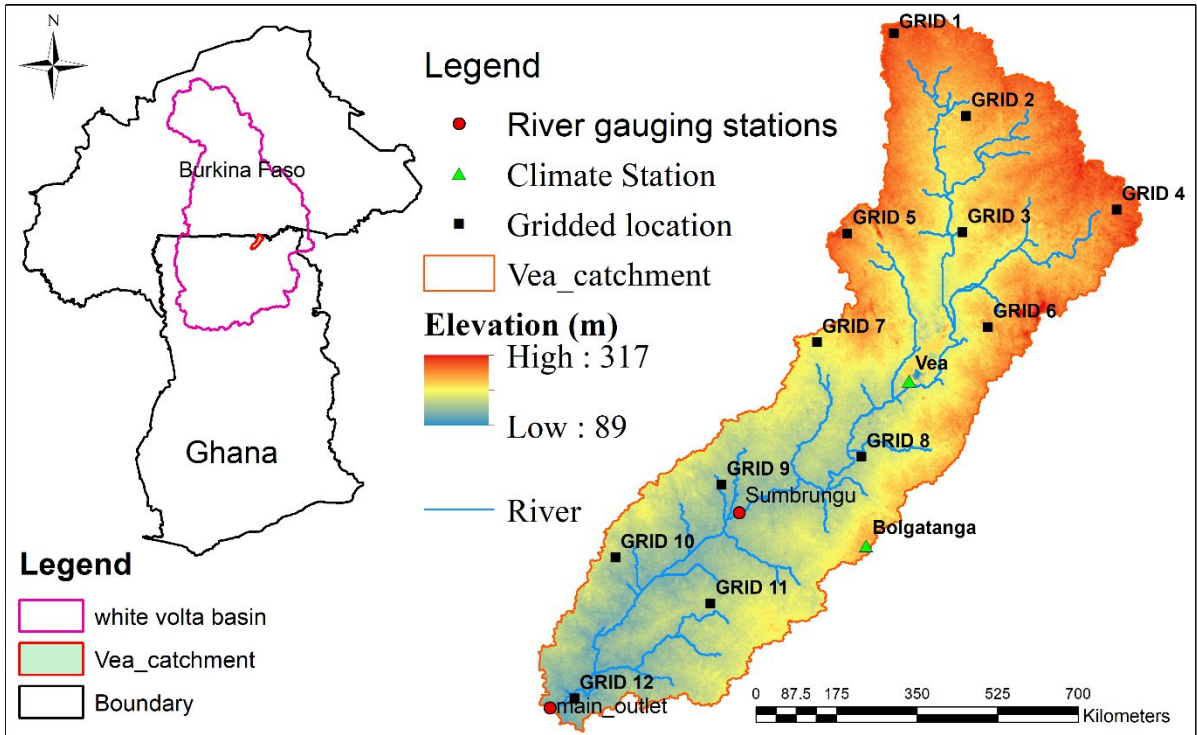


Figure 1 Location of the Vea catchment within the White Volta Basin, as well as the topography, weather and hydrological measurement stations in the Vea catchment, after Larbi et al. (2018).

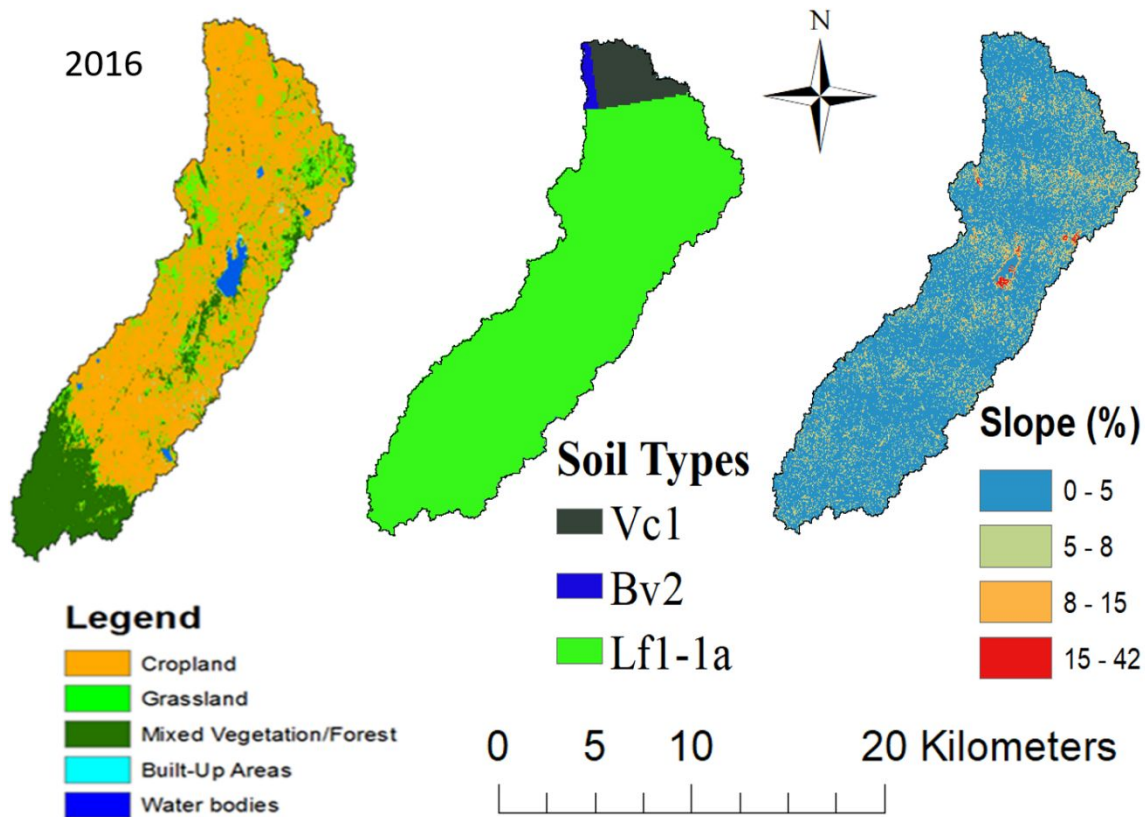


Figure 2 Land use/land cover (left), Soil (middle), and slope classes (right) maps of the Vea catchment. Lixisols (Lf1-1a), vertisols (Vc1) and cambisols (Bv2)

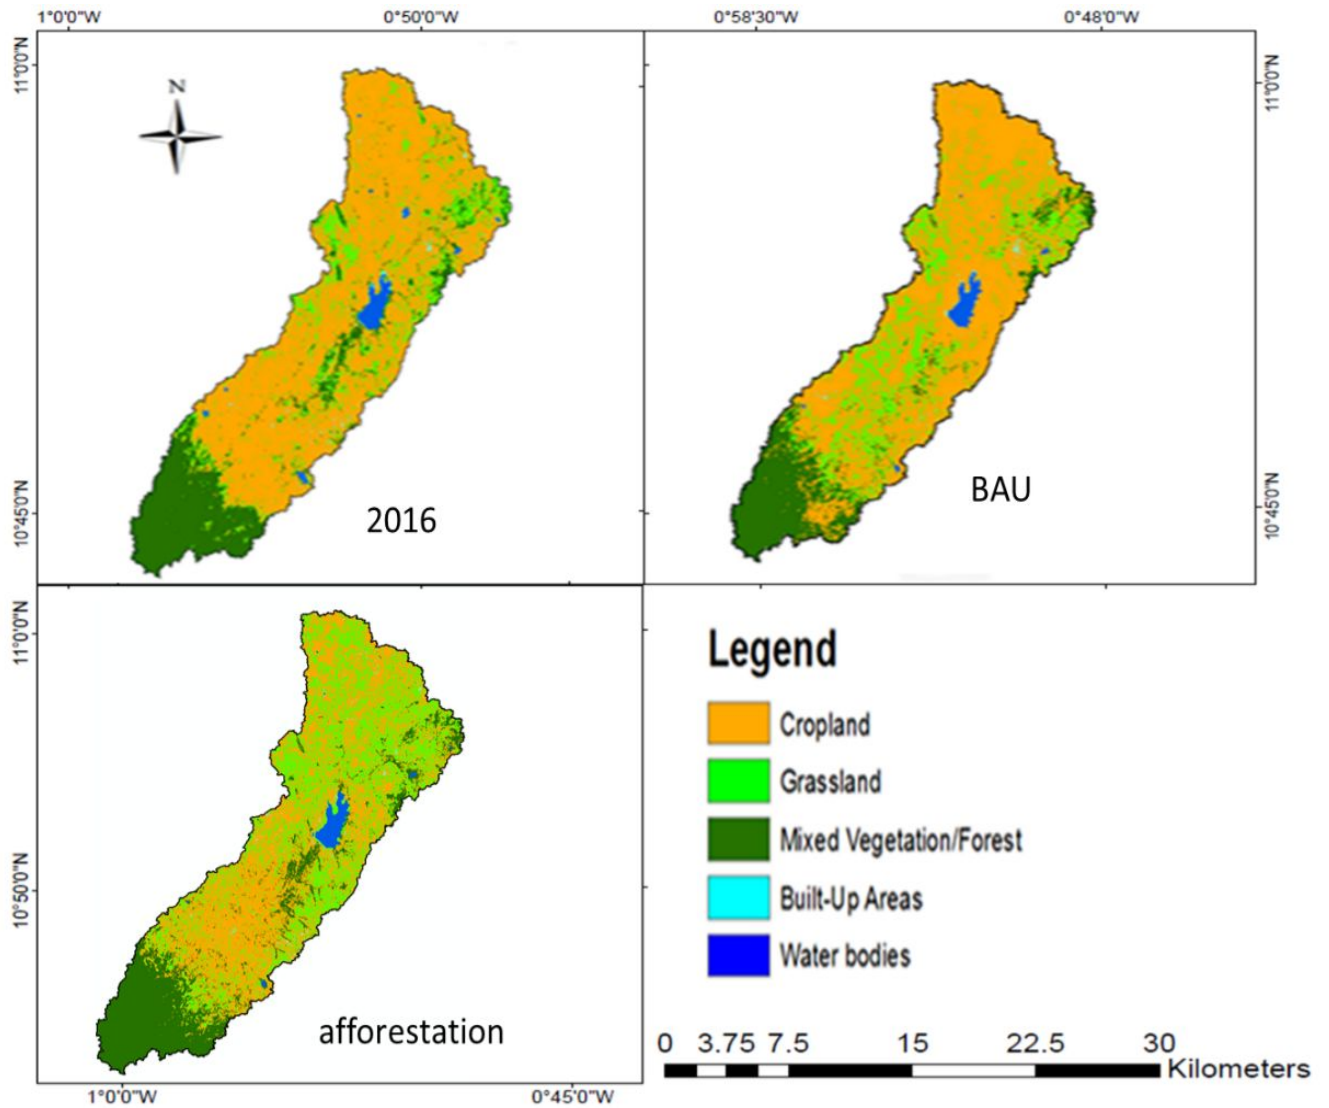


Figure 3 The baseline and 2025 LULC change scenarios maps of the Veia catchment (Larbi et al. 2019)

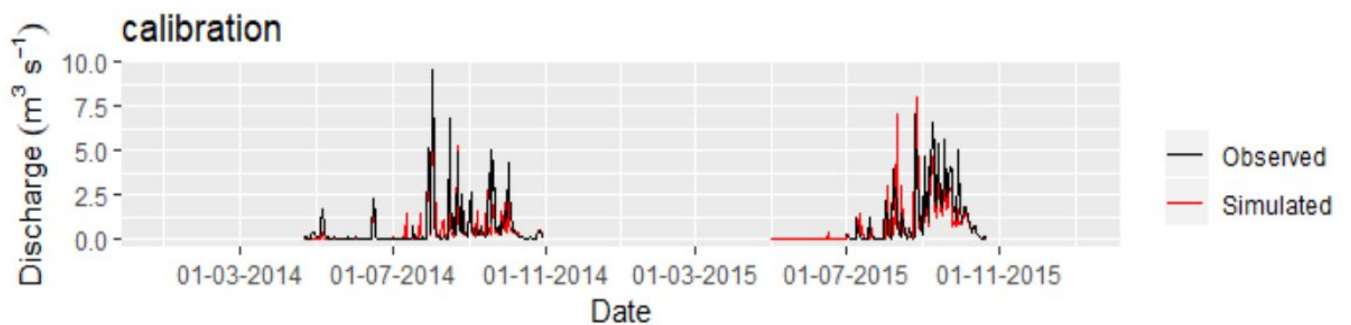


Figure 4 Simulated vs. Observed daily discharge for *calibration* period (2014-2015) at Sumbrungu gauge station, Veia Catchment

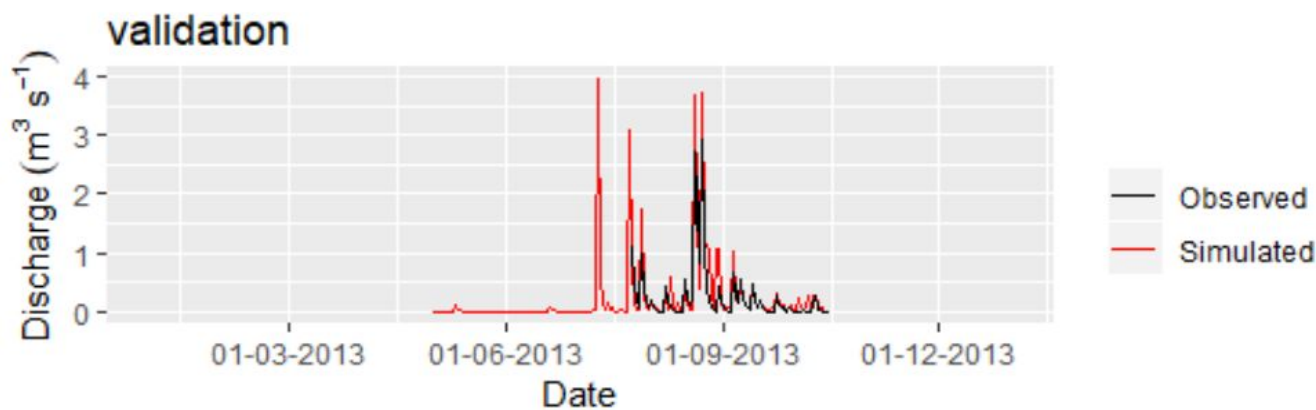


Figure 5 Simulated vs. Observed daily discharge for *validation* period (2013) for Sumbrungu gauge station, Vea Catchment

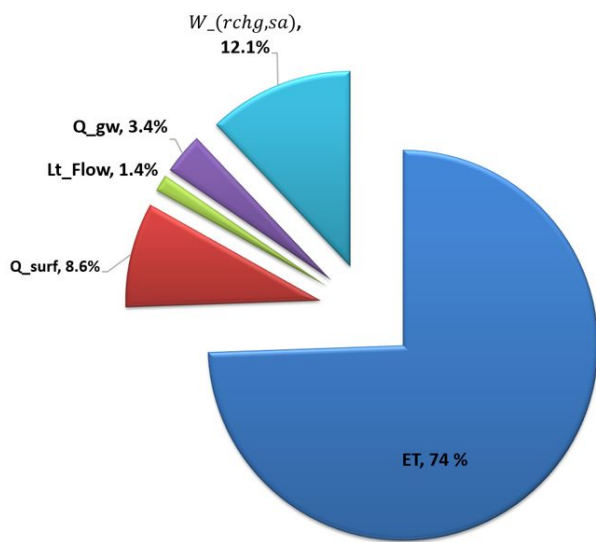


Figure 6: Mean annual water balance components as a proportion of rainfall for the Vea catchment. Q_{surf} , ET , Lt_{flow} , Q_{gw} , and $W_{(rchg,sa)}$ are surface runoff, actual evapotranspiration, lateral flow, groundwater flow, shallow aquifer recharge respectively.

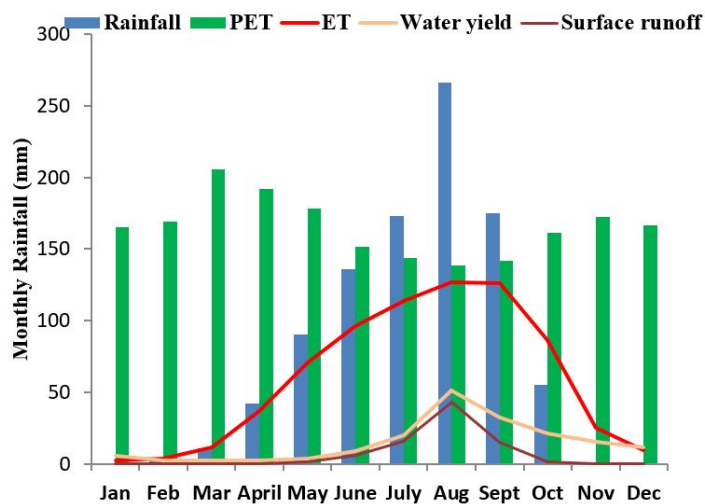


Figure 7: Mean monthly water balance components from 1993-2017 for the Vea catchment.

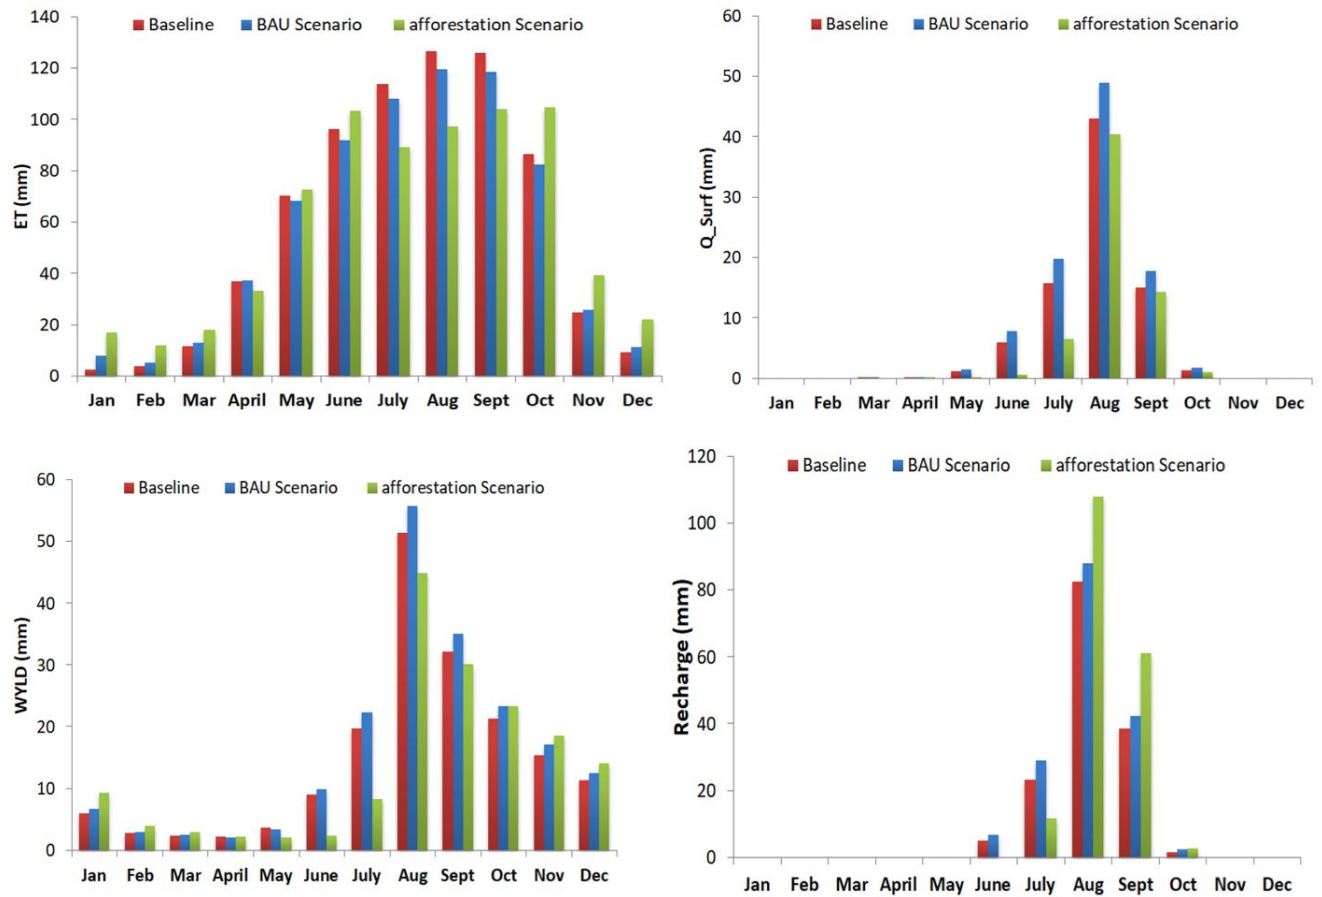


Figure 8 Mean monthly water balance components under different scenarios of land use change

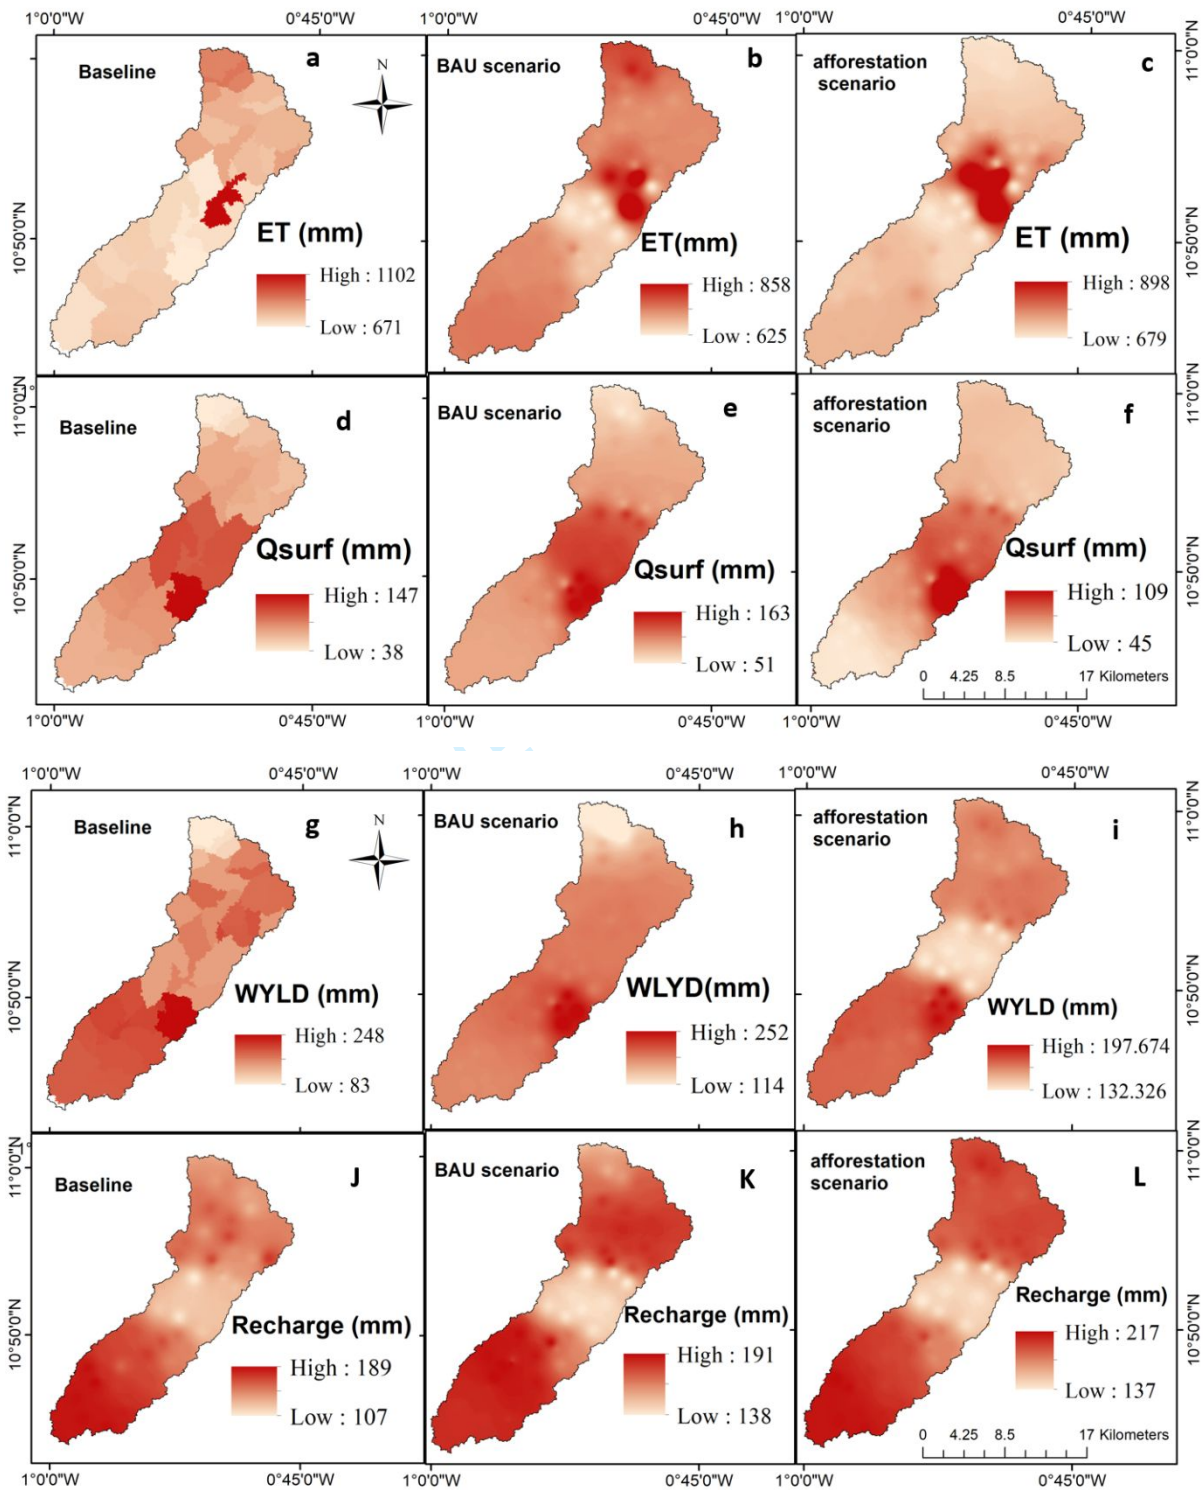


Figure 9 SWAT Simulated mean annual water balance components under BAU and afforestation scenarios of land use change relative to the baseline (2016) LULC map