

How do urban residents use energy for winter heating at home? A large-scale survey in the hot summer and cold winter climate zone in the Yangtze River region

Article

Accepted Version

Creative Commons: Attribution-Noncommercial-No Derivative Works 4.0

Jiang, H., Yao, R. ORCID: <https://orcid.org/0000-0003-4269-7224>, Han, S., Du, C., Yu, W., Chen, S., Li, B., Yu, H., Li, N., Peng, J. and Li, B. (2020) How do urban residents use energy for winter heating at home? A large-scale survey in the hot summer and cold winter climate zone in the Yangtze River region. *Energy and Buildings*, 223. 110131. ISSN 0378-7788 doi: <https://doi.org/10.1016/j.enbuild.2020.110131> Available at <https://centaur.reading.ac.uk/91699/>

It is advisable to refer to the publisher's version if you intend to cite from the work. See [Guidance on citing](#).

Published version at: <http://dx.doi.org/10.1016/j.enbuild.2020.110131>

To link to this article DOI: <http://dx.doi.org/10.1016/j.enbuild.2020.110131>

Publisher: Elsevier


All outputs in CentAUR are protected by Intellectual Property Rights law, including copyright law. Copyright and IPR is retained by the creators or other copyright holders. Terms and conditions for use of this material are defined in the [End User Agreement](#).

www.reading.ac.uk/centaur

CentAUR

Central Archive at the University of Reading

Reading's research outputs online



<https://doi.org/10.1016/j.enbuild.2020.110131>

How do urban residents use energy for winter heating at home? -A large-scale survey in the hot summer and cold winter climate zone in the Yangtze River Region.

Haochen Jiang¹, Runming Yao^{1,3*}, Shiyu Han³, Chenqiu Du^{1,2}, Wei Yu^{1,2}, Shuqin Chen⁴, Baiyi Li⁵, Hang Yu⁶, Nianping Li⁷, Jinqing Peng⁷, Baizhan Li^{1,2*}

¹ Joint International Research Laboratory of Green Buildings and Built Environments (Ministry of Education), Chongqing University, Chongqing 400045, China

² National Centre for International Research of Low-carbon and Green Buildings (Ministry of Science and Technology), Chongqing University, Chongqing 400045, China

³ School of the Built Environment, University of Reading, Reading RG6 6DF, UK

⁴ College of Civil Engineering and Architecture, Zhejiang University, Hangzhou 310058, China;

⁵ Faculty of Architecture, Southwest Jiaotong University, Chengdu 610031, China

⁶ School of Mechanical Engineering, Tongji University, Shanghai 201804, China;

⁷ College of Civil Engineering, Hunan University, Changsha 410082, Hunan, China;

* Corresponding author:

r.yao@reading.ac.uk;

baizhanli@cqu.edu.cn

Abstract

The increased demand for improving indoor thermal environment in the hot summer and cold winter climate zone (HSCW) in the Yangtze River region in China poses enormous challenges in terms of energy policy and design solutions for this unique region. A comprehensive understanding of people's habits and behaviors involving winter heating is imperative for decision making for urban heating infrastructure investment strategies that significantly impact on the decarbonization of heating. However, there has been little knowledge gained from large-scale studies in this region. The aim of this study is to develop a rigorous survey method in order to obtain reliable data for analysis. Five municipal/capital cities across the upper, middle and downstream Yangtze River are surveyed based on 30 randomly generated locations in each city. A total of 8,471 valuable samples were obtained in the survey conducted in the winter from November 2017 to March 2018. It is revealed that air conditioning/air source heat pumps are the predominant systems, accounting for 63% and 58% for bedroom and living room heating respectively. The use patterns of heating are diverse featuring 'part-time-part-space' systems in accordance with the occupancy patterns. There is significant evidence of the habit of opening a window to provide a gap for fresh air irrespective of whether the heating is in use. Two-step cluster analysis is employed to subdivide occupants' heating-related behaviors into three clusters to characterize households. This study fills the knowledge gap of winter-heating-related behaviors. The research outcomes will benefit building energy simulations for energy prediction and help policy makers make decisions on providing strategic guidance in terms of winter heating solutions in this region.

Keywords

Hot summer and cold winter zone; residential buildings; socio-tech survey; winter heating behaviors;

1. Introduction

Due to its vast territory, China has a diverse climate which has been categorized into five typical climate zones: severe cold, cold, hot summer and cold winter (HSCW), hot summer and warm winter (HSWW) and mild, according to GB50178 [1] for building designs. Arising from China's historical energy policies in the 1950s, the Qinling Mountains - Huaihe River Line (hereafter called the QinHuai Line and denoted as the QH line in this paper) was set up as a geographical boundary to provide distinct heating (northern) and non-heating (southern) regions based on climate conditions (see Figure 1). As a result, in the severe cold and cold zones of northern China, the urban district central heating system has been the most popular mechanism for winter heating and people have been privileged with this heating policy thanks to the urban heating infrastructure and heating incentives. By contrast, the HSCW zone in China shows a typical characteristic of a hot summer and cold winter climate, where the average air temperature in the coldest month is between 0°C and 10°C. However, due to the traditional heating division line for northern and southern China, the winter indoor thermal environment in this area is even worse than that in northern China [2]. The average indoor temperature in winter is usually below 10 °C without central space heating facilities [3]. Therefore, space heating in cold winters has been expected to be one of the most necessary measures demanded in order to maintain a basic indoor environmental quality for people's health and wellbeing.

The QH boundary heating policy was made mainly due to the economic capacity and energy resource scarcity at the time and it has been challenged by the increased heating demand of the region due to economic reform and growth over the last four decades. Especially, the Yangtze River region accommodates more than 55% of the population and shares more than 40% of China's GDP [4]. Thus, it has become one of the well-developed regions of the country. It is not hard to imagine people living in the HSCW climate zone increasing their demand for improved indoor environmental quality [5-8]. However, the national targets pertaining to the cap on primary energy consumption and the peak of CO₂ emissions have applied specific pressures in this region. Therefore, a trade-off between thermal environment improvement and building energy efficiency is urgently required in

30 the Yangtze River region, to maintain a healthy growth in energy demand and consumption
31 in buildings.

32 Currently, the question “should district/central heating systems be considered in the HSCW
33 climate zone in China?” has become a hotly debated topic among scholars, policy-makers,
34 and citizens in the region. The issue relates to many factors which could affect the decision
35 making on the investment in urban heating infrastructure from environmental, economic,
36 and social perspectives. There were no detailed policies that could solve the winter heating
37 problems for the HSCW zone. However, for those involved in energy conservation, the
38 fast-growing demand for space heating in the HSCW zone is significantly increasing the
39 national energy consumption, which also causes related problems involving carbon
40 emissions and air pollution. Therefore, in response to this problem, it is necessary to have
41 comprehensive and reliable knowledge of how people use energy for winter heating in their
42 homes, which could be useful for policy recommendations and design guides.

43 1.1. Literature Review

44 In the HSCW climate zone, winter heating is an extremely challenging problem due to its
45 complex nature related to the local climate, historical habits, thermal comfort, and socio-
46 economic, energy and environmental, technical, and occupant behavior issues. To
47 understand the research gap for winter heating in the HSCW zone, a series of previous
48 relevant studies were critically reviewed, as follows.

49 1) The current low level of indoor thermal comfort in winter

50 By reviewing the historical development of the thermal environment in the HSCW zone in
51 China, it can be seen that the level of thermal comfort in winter is at a very low level. Even
52 in recent years, the majority of residential buildings still do not have a full set of winter
53 heating equipment [9]. People in the HSCW zone have lived for many years with no heating.
54 They do not tend to introduce heating devices, but they do put on extra clothes, which has
55 created a local habit of ‘enduring the cold winter without heating[10].

56 However, this low level of indoor thermal comfort in winter is being rapidly improved due
57 to the rapidly growing economic development in this region. From the study by Wang *et*
58 *al.* [11], it is clear that the trend of pursuing better indoor thermal comfort for homes is
59 significantly influencing heating behaviors in the HSCW zone, especially for new
60 generations and the elderly groups. Therefore, it is predicted that the future potential energy
61 consumption for heating in the HSCW zone could be enormous [10], and it is an urgent
62 task to understand the existing winter heating situations in this region and find solutions.

63 2) Building energy policy

64 The development of building energy policy in the HSCW zone had a late start and made
65 slow progress. In 2001, the building design standard for the HSCW zone [9] started to
66 raise the issue of the requirement for auxiliary space heating measures for public buildings
67 on cold winter days. Since then, there has been no heating policy relating to residential
68 buildings until the first code [9] was issued in 2010. Disappointingly, there were no detailed
69 policies that could solve the winter heating problems for the HSCW climate zone and the
70 situation remained unchanged until recently. This means in the majority of homes, the poor
71 thermal insulation designs are not well-prepared for space heating [12].

72 Consequently, although the living standard in cold winters in the HSCW region is
73 improving by the increased use of a variety of heating measures, the energy consumed by
74 the diffusion of individual heating devices has also increased incredibly by more than 500
75 times from 1998-2013 [10], which is contrary to the building energy conservation policies
76 for China. Therefore, the question about what would be the appropriate solution for winter
77 heating in this region remains unanswered.

78 3) Appropriate winter heating systems for HSCW climate

79 As the demand of winter heating is increasing, the types of heating become an essential
80 concern. Currently, the majority of people living in the HSCW zone who use winter heating,
81 are using individual electrical heating devices or air-conditioners [9]. These individual
82 systems used for space heating are often argued to be inefficient and expensive for energy

83 due to their low efficiency of performance, and furthermore, because of the poor thermal
84 insulation in the building envelope in this region. By contrast, in northern China, the policy
85 support for district central heating systems has been developed for a long time [13] and has
86 contributed to comfortable indoor environments. Therefore, whether or not to apply the
87 district heating system in the HSCW zone has been argued over for many years on social
88 media and within official civil channels [14, 15].

89 However, many studies have analyzed and provided evidence that it is inappropriate to
90 apply district central heating in the HSCW zone. Studies [7, 13, 16, 17] have suggested
91 that it is unnecessary to provide district heating for southern China. These scholars claim
92 that the proposed development of large scale urban heating infrastructure would obviously
93 burden the country's environmental impact and hinder the progress of energy conservation
94 [18]. It is also discussed that a personalized dispersed heating system is more suitable for
95 the climate conditions of the HSCW zone as there is a much shorter period of heating
96 compared to the severe cold and cold zones. Moreover, Hu *et al.* [17] state that a dispersed
97 heating system has the advantages of flexibility and easy installation, which does not
98 require huge amounts of engineering work for network refurbishment. As a result, it
99 appears that a dispersed heating system is the appropriate option for winter space heating
100 in the HSCW zone.

101 4) Occupant behaviors using dispersed heating systems

102 Importantly, when using dispersed heating systems, occupants' behaviors become the main
103 controlling factor, but pose many challenges [19]. Many studies [20-22] have verified that
104 occupants' behaviors have a pivotal role in building energy consumption, alongside the
105 thermal performance of building envelopes and the efficiency of heating devices [23-25].
106 Studies have proven that the occupancy profiles, different occupancy patterns, the habit of
107 meeting the demand for fresh air by opening windows [7, 26, 27], and variations in the
108 occupants' thermal preferences for the use time and the temperature setting points of air-
109 conditioning [28-30] have significant impacts on building energy consumption, along with
110 the usage patterns [22, 23], local diversity[10], and family structure [31]. Therefore,
111 compared to the heating behavior in northern China, the residential heating behaviors in

112 the HSCW zone are more diverse and complicated in terms of family structure, economic
113 level, thermal comfort requirements, heated room space, and local climate conditions [32].
114 The elucidation of this situation requires further detailed research.

115 Furthermore, it is arguable that many studies of occupancy behaviors and their impact on
116 building energy consumption in this region were simplified and thus of questionable
117 reliability [33]. For example, measurement studies by Lin *et al.* [10], Yoshino *et al.* [34],
118 and Wang *et al.* [8] tested the building operating energy and behaviors, but the sample size
119 was less than 30 households, which could be challenged for varying individual factors.
120 Peng *et al.* [35] and Ge *et al.* [36] have studied the energy modeling by combining
121 measurement, simulation, and behavior surveys, but their case studies considered only one
122 city and one type of building. As there were biases in the descriptions of the behaviors, e.g.
123 AC setting points and window operation behavior, the occupant praxeology for winter
124 heating still remains incompletely understood. Thus, with suggestions from statistical
125 modeling in this research field, such as Chen *et al.* [37] and Guo *et al.* [25], studies with
126 comprehensive survey data are necessary and essential to understand how people in this
127 region heat their homes and how they behave to secure and maintain this heating.

128 1.2 Aims of the study

129 Building on the literature above, the aim of this study is to acquire a comprehensive
130 understanding of occupants' heating-related behaviors in residential buildings and their
131 demand for heating in winter in the HSCW region. This study contributes to a rigorous
132 large-scale survey of heating demand in terms of identifying locations, sample size, and
133 questionnaire design. The research outcomes are expected to benefit building energy
134 simulations related to occupant behaviors, policy makers and their decision making, and
135 those requiring strategic guidance on producing winter heating solutions in the HSCW
136 region. This fills the knowledge gap arising from the lack of reliable data on how urban
137 residents in the Yangtze River region use energy for winter heating.


138 2. Method

139 Among many methods applying social science to human behavior studies, survey methods
140 such as a census, interviews, and polling are widely considered to be efficient ways of
141 collecting preferences, opinions, behaviors, and factual information [38]. The
142 questionnaire survey method has been applied in this study. The extensive information
143 related to building construction, indoor occupancy, occupant behaviors, and the use of
144 heating devices was considered. The detailed processes involved in the questionnaire
145 design, the selection of the cities, and the sample collection and analysis are described in
146 the following sections.

147 2.1 Selection of cities

148 To understand the heating situations and occupant behaviors in residential buildings in the
149 HSCW region, five municipality/capital cities - Chongqing, Chengdu, Changsha,
150 Hangzhou, and Shanghai - spread over the upper, middle and lower parts of the Yangtze
151 River, were selected, as shown in Figure 1.

152

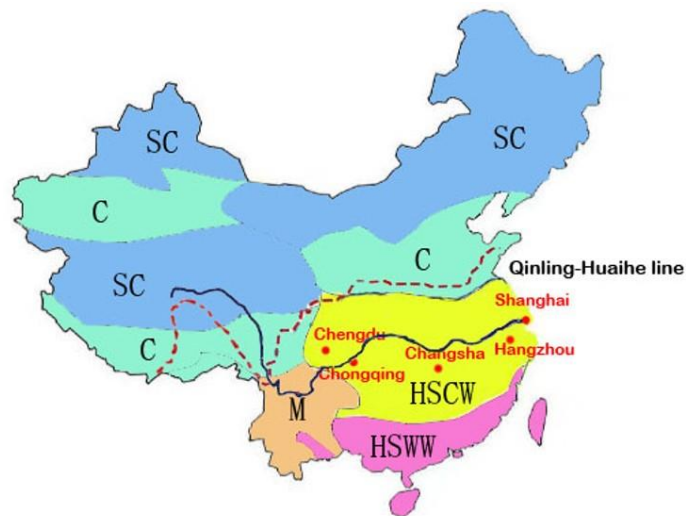

153

154

Figure 1: Geographic distribution of the five selected cities in the HSCW zone

155

156

157

Detailed climate data for the five cities in this region are listed in Table 1, which were referred to Ref.[39]. It is clearly seen that the five cities share a similar longitude. This leads to a similar annual average air temperature, with a slight range from 16.6°C to 18.5°C.

158 In addition, Table 1 shows that the annual average relative humidity for the five cities is
 159 high at around 75%-80%, reflecting the characteristic high air humidity in this region.

160 Table 1: Geographic information and typical meteorological data of the five cities

City	Latitude	Longitude	Altitude (m)	Annual average temp(°C)	Annual average RH (%)	Annual average radiation (W/m ²)	Annual average outdoor wind (m/s)
Chengdu	103.52	30.45	547.7	16.6	80.97	46.60	1.19
Chongqing	106.28	29.35	259.1	18.5	81.54	42.42	1.45
Changsha	112.55	28.13	68.0	17.1	82.24	81.06	2.14
Hangzhou	120.10	30.14	41.7	17.0	75.79	91.33	2.07
Shanghai	121.27	31.24	5.5	16.7	75.96	107.02	3.25

161

162 2.2 Sample sizes

163 When using the survey method, it is important to obtain a representative sample from a
 164 population by using simple random, stratified random, or cluster sampling methods [40].
 165 An appropriate sample size determines significantly whether the survey results can truly
 166 cover a wide range of situations. To represent the real situations in each city, the cluster
 167 sampling method based on probability sampling (i.e. random sampling) was selected. The
 168 sample size was determined by using Equation (1) [41].

$$169 \quad n = \frac{X^2 \times N * P * (1 - P)}{(ME^2 * (N - 1)) + (X^2 * P * (1 - P))} \quad (1)$$

170 Where,

171 n ----the sample size;

172 X² ----the statistical values associated with the desired level of confidence;

173 N----the population size in each city;

174 P----the preliminary estimate of the proportion in the population;

175 ME----the desired margin of error (%).


176 In order to determine a sample size of n, a 95% confidence level is used (Confidence
 177 Interval CI=0.95) in this study; ME is set at 5%. For a degree of freedom of 1, the X^2 value
 178 can be found using the chi-square test making the value of X^2 for a 95% confidence interval
 179 (CI) equal to 3.84. According to Ref. [41], as the value of P was not known, the maximum
 180 value of 0.5 was assumed in this study. Based on the census data [4], the population of each
 181 city is listed in Table 2. Therefore, the required sample size calculated using Equation (1)
 182 is listed in Table 2.

183 Table 2: Research situation and sample size

City	Permanent Resident Population (million)	Calculated Sample Size	Planned Sample Size
Chengdu	15.918		
Chongqing	30.484		
Changsha	7.645	384	1500
Hangzhou	9.188		
Shanghai	24.197		

184

185 After the sample size for each city is determined, it is necessary to consider location
 186 distributions within each city in order to investigate the representative communities of each
 187 city. Therefore, the locations of residential communities in each city were coded using a
 188 random number generator to obtain the designated locations for survey. It
 189 is worth noting that no standards such as postcode orders or location information were
 190 applied during screening, which ensured the randomness of residential communities in
 191 each city. As a result, 30 sampling sites were identified for each city, and the sample
 192 distribution is shown in Figure 2. The red dots in Figure 2 are the survey sites, and the
 193 colors of each region border correspond to the number of samples. All urban areas in the
 194 five cities have ideal site representativeness, and, thanks to the random sampling, there is
 195 no small probability deviation concentrating in a narrow range.

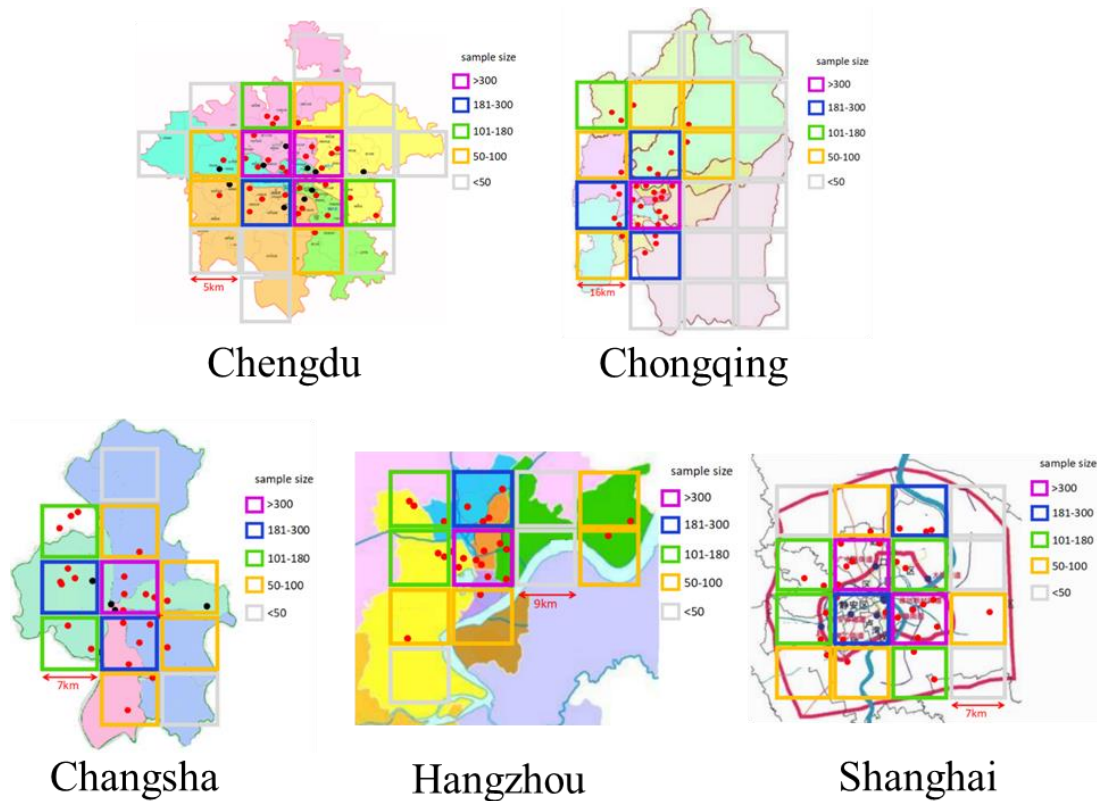

196

Figure 2: Sample distribution in the main districts of each city

197

198 2.3 Questionnaire Design

199

A rigorous survey is based on research questions, theories, reasonable hypotheses, and well-defined explanations of variables [42]. To meet the purpose of obtaining the data for analysis and the research objectives of this study, the contents of the survey questionnaire have been divided into two parts. The building construction information, family structure of respondents, energy-matter behaviors and habits for winter heating and ventilation have been partly optimized and recorded as the occupancy behavior schedules for the related analysis of building heating energy consumption [43]. Explanations of how each part of the questionnaire was designed to respond to the research questions are presented as follows:


207

208 Part 1 mainly includes the basic information on building characteristics such as building
209 construction age and dwelling size, family structure and time at home. According to the
210 year of the upgrading of building energy design codes, the construction age band is
211 classified as ‘before 2001’, ‘2001-2009’, and ‘after 2009’. Five family structures were
212 mainly considered referring to the statistical data from the 2016 China National Bureau of
213 Statistics [4]: (a) single (S); (b) couple (C); (c) couple with a child (CP+C); (d) couple with
214 child and the elderly (CCGP); (e) others - any family structure not listed.

215 Part 2 mainly focuses on how people heat their homes. Questions include “what are the
216 measures used for heating?”, “how do people operate them?”, and “what are the setting
217 points of the air conditioning?”. Through desktop studies and heating appliance market
218 information, the research team listed commonly-used heating devices such as air
219 conditioning, under-floor heating, radiators, oil radiator heating, portable electric heater,
220 fan heater, electric blankets, hot-water bags, etc. and temperature setting-points, clothing
221 regulations, etc. To note, given that residents may have different behaviors in different
222 types of rooms, the occupant behaviors in the bedroom and living area were investigated
223 separately. These questions are expected to benefit researchers seeking to explore the real
224 heat demands in this region, as well as for policy makers for future heating applications
225 and building energy efficiency.

226 Many studies have confirmed that long-term occupants living in the HSCW zone have
227 habits of opening windows for fresh air, even in the winter time [44]. This could be one of
228 the most diverse and erratic behaviors due to individual differences and could significantly
229 affect thermal comfort and heating energy consumption [26]. Therefore, a question relating
230 to the window opening gap when heating is in use is included in the questionnaire.

231 The detailed framework of the questionnaire is shown in Figure 3. An appendix containing
232 the questionnaire is provided for reference. The questionnaire was presented in three
233 sections, in three sections of bedroom, living room and fresh air demands. Note that
234 background information, such as gender, age, occupation, family income range and so on
235 were designed in questionnaires but were exclusively considered in this study, considering
236 the main aims and propose of this study.

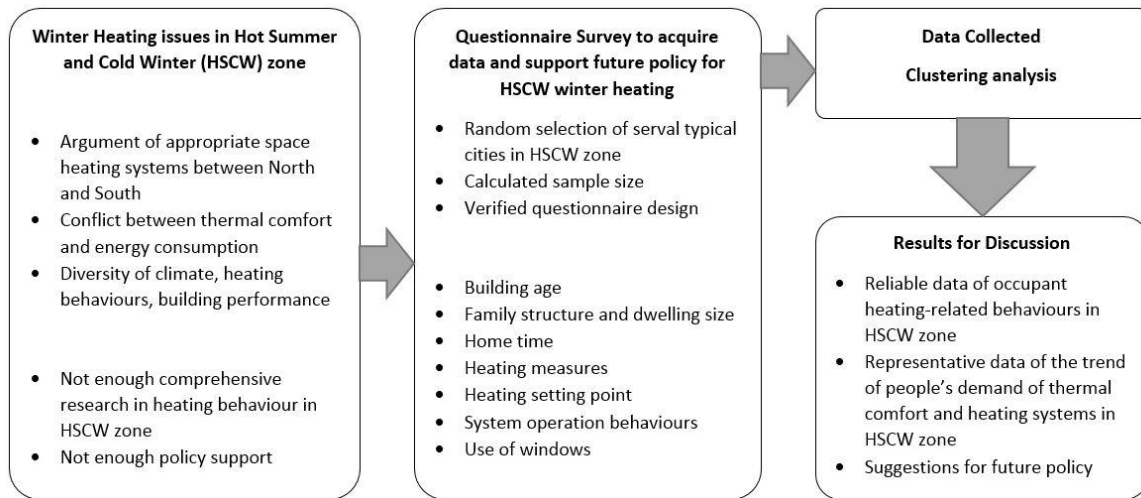

237

238

Figure 3: Framework of the questionnaire survey process

239 2.4 Data screening and statistics

240 1) Data collection

241 The surveys were conducted simultaneously in the selected sample locations of the five
 242 cities from November 2017 to February 2018. The surveyors paid visits to the selected
 243 communities in each city. A total number of 8,764 respondents completed the questionnaire
 244 including samples of 1,619 from Chengdu; 2,196 from Chongqing; 1,197 from Changsha;
 245 1,716 from Hangzhou; and 2,036 from Shanghai, by means of face-to-face completion of
 246 paper-based forms or by using an electronic version as a social media we-chat app. After
 247 screening null or invalid values, the sample size used in analysis was 8471. The survey in
 248 each city met the required minimum sampling size which was indicated in Table 2,
 249 ensuring the representative and valid analysis in the following results.

250 2) Validity and reliability analysis

251 We conducted a questionnaire reliability and validity testing in this study. Reliability
 252 analysis and validity analysis are two methods to check the data quality in questionnaire,
 253 where the former describes the degree of consistency of data from questionnaires in survey
 254 during repeated measurements and the latter evaluates to what degree the results of the

255 designed questions collected by questionnaires could reflect the real situations of occupants'
256 actual heating related behaviors.

257 For reliability analysis, the Alpha reliability coefficient method, i.e. Cronbach's Alpha, is
258 widely used to examine the inner consistency. The method is suitable for analyzing
259 designed question in questionnaires in this study. The calculation of the Alpha
260 coefficient is as follows [45]:

$$261 \quad \alpha = \frac{k}{k-1} \left(1 - \sum_{i=1}^k \frac{s_i^2}{s_p^2} \right) \quad (2)$$

262 Where,

263 k ---- The number of items for the research objects;

264 s_i^2 ---- The variance per item;

265 s_p^2 ---- The total variance of the observed items.

266 In addition, the validity analysis is mainly adopted to examine whether the designed
267 questions are able to reflect the real situations focused. The higher the values of validity
268 are, the more accurately the results obtained from questionnaires reflect the real features.
269 It is defined as the ratio r_{xy} of variances of effective values and real values, as expressed in
270 Equation (3).

$$271 \quad r_{XY} = \frac{S_X^2}{S_Y^2} \quad (3)$$

272 The validity and reliability tests theoretically could be conducted before or after the survey;
273 the complemented survey would be re-conducted if the test was unacceptable. In this study,
274 the tests were conducted after the survey, and Table 3 shows the results of the validity and
275 reliability tests of different questions in the questionnaire. According to Refs. [45, 46], the
276 results are good when the reliability coefficient and validity coefficient are higher than 0.9;
277 and are acceptable when they are above 0.8. Conversely, when the values are lower than
278 0.7, the questionnaire should be re-designed and the research should be re-conducted in

279 order to ensure scientific rigor. The results in Table 3 shows that for the target questions,
 280 the coefficients α were all higher than 0.8, indicating the question designs were good and
 281 the questionnaires were acceptable. In addition, Table 3 shows that the values of validity
 282 test were both higher than 0.7, suggesting the results obtained from the questionnaire
 283 survey could efficiently reveal the heating behaviors of residents in this region. This lays
 284 the foundation for the following analysis.

Table 3: Results of validity and reliability testing

Method	Number of questions(Appendix)	Contents description	Coefficients of Cronbach's Alpha/KMO test
Reliability Analysis	Q1,Q2,Q3	Basic information and background	0.80
	Q8,Q10,Q11	Heating-based behaviors in living room	0.85
	Q4,Q7	Temperature set points in bedroom and living room	0.91
Validity analysis	Q8,Q10,Q11	Heating-based behaviors in living room	0.74
	Q4,Q7	Temperature set points in bedroom and living room	0.88
	Q5,Q6,Q8,Q9,Q10,Q11	Occupants' behaviors during heating in bedroom and living room	0.79

285

286 3) Statistical analysis

287 There are three types of variables from the questionnaire statistics: continuous variables
 288 (e.g. AC setting points), dichotomous variables (e.g. ratio of HVAC behaviors), and ordinal
 289 multiple variables (e.g. modes of HVAC behaviors), which correspond to different
 290 conditions and analytical methods. Descriptive statistics were used first to give a profile of
 291 occupant behaviors under different situations. The correlation analysis was used to evaluate
 292 the relations among variables and the Kendall's tau-b correlation index was adopted to
 293 describe the relations of two classified variables in questionnaires. The ANOVA test was
 294 used to examine the differences in occupant behaviors during heating periods among the
 295 five cities, and the post-analysis ANOVA was used to compare the differences among
 296 different groups (e.g., family structures). The multi-way ANOVA was then conducted to
 297 identify the factors that affect the temperature setting points of occupants according to four

298 typical family structures. The cluster analysis was then employed to classify and
299 summarize the households according to the different heating-related behaviors of
300 occupants. All tests conducted were two-sided and any p-values less than 0.05 were
301 considered significant.

302

303 3. Results

304 The current study aimed to provide an overview of knowledge of heating related behaviors
305 of residents at homes in the Yangtze River region; the data from surveys from the five
306 cities were analyzed as a whole in the following analysis, regardless of the slight
307 differences among different cities.

308 3.1 Basic information from the survey

309 1) Building age

310 The census data on building construction age from the Real Estate source for each city has
311 been collected in Table 4. In order to verify whether the building age proportions of this
312 study reflect the cities' real situations, data collected from this survey were compared to
313 the statistical data in Table 4. The most investigated buildings were built from 2001 to 2009
314 accounting for the highest proportion of 45%. This was followed by buildings constructed
315 before 2001 with a proportion of 36.1%. The proportion of buildings that were built after
316 2009 was small, about 18.9%. A close comparison shows that the distribution of
317 construction ages of investigated buildings exhibited a good consistency with the census
318 data, and no significant differences of construction ages were found between the statistics
319 and the surveyed results (t test, $p > 0.05$). This ensures our survey truly reflects the real
320 building characteristics situation.

321

Table 4: Proportion of building age of this survey and the census data

	Before 2001	2001-2009	After 2009
Census data	35.5%	44.9%	19.6%
Surveyed buildings	36.1%	45.0%	18.9%

322

323 2) Family structure and dwelling size

324 The analysis of types of family structure and dwelling size can be seen in Table 5. Most
325 investigated families were couples, couples with children (CP+C), and couples with
326 children and the elderly (CCGP), accounting for 27%, 33% and 26% respectively, which
327 reflects well the variety of family types. By analyzing the correlation coefficient r between
328 the family structures and dwelling size, the correlation coefficients in Table 5 exhibit high
329 positive correlations ($p < 0.001$). The bigger the family size is, the bigger the coefficient is,
330 indicating that the dwelling had more rooms. Single persons usually take one or two-
331 bedroom dwellings. Two-bedroom and three-bedroom dwellings are the popular types in
332 residential buildings and the most complex three-generation family structure are generally
333 found in three-bedroom dwellings. However, there were still a big proportion (0.49) of type
334 of family living in the two-bedroom dwellings.

Table 5: Correlation coefficient between family structures and dwelling types


Family structures	Number of samples	Dwelling type*			
		One bedroom.	Two bedrooms.	Three bedrooms.	Four bedrooms
Single	1139 (14%)	0.3	0.40	0.27	0.03
Couple	2126 (27%),	0.14	0.56	0.26	0.04
CP+C	2597(33%)	0.03	0.49	0.40	0.08
CCGP	2052 (26%)	0.02	0.32	0.56	0.10

335 (Note: * the number of bedrooms in the investigated dwellings)

336 3) Times when residents are at home

337 The fact whether or not occupants are at home, significantly relates to the usage of
338 household heating. The percentage time spent at home as reported by respondents in each

339 of the four family structures is shown in Figure 4. From the figure we can see that for the
 340 family structure with children and the elderly (CCGP), 80% of respondents reported the
 341 home time as daytime from 7:00 to 18:00; this proportion was around 50% for couples and
 342 couples with a child (CP+C). By contrast, single persons had the lowest home time during
 343 daytime with around 20-30%. These results reasonably reflect the activity characteristics
 344 in residential buildings, which are believed to affect the heating modes and behaviors at
 345 home. Wang *et al.* [8] found that retired couple/single households consume on average
 346 47% more energy than those with no retired members. This may be explained by a longer
 347 heating duration needed by the households with retired members. Combined with Figure
 348 4, families that include the elderly had a higher home time - 80% - during daytime. This
 349 may contribute to higher heating demands and energy consumption compared to other
 350 family structures where occupants leave home for work during the daytime. Therefore, in
 351 future, it would be worthwhile considering occupancy as a most important factor for
 352 building energy efficiency design standards, energy efficiency policy-making, and
 353 predicting energy consumption in the HSCW zone.

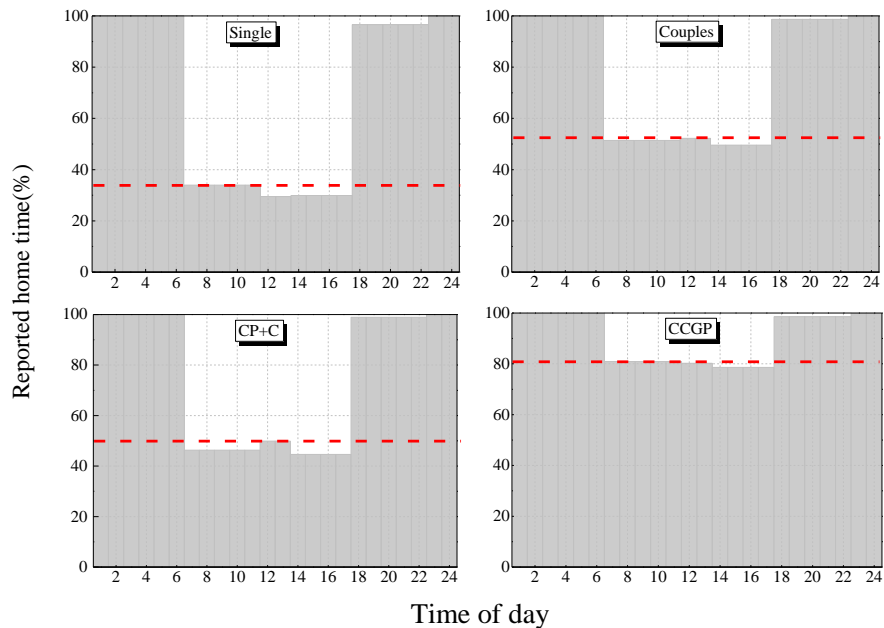

354

355

Figure 4: Percentage of the reported home time

356

357 3.2 Heating behaviors

358 1) Heating measures

359 From this survey, 63% of respondents reported heating their bedroom and 43% their living
360 room, as shown in Figure 5. From the figure, we can see that the air conditioner (AC), or
361 air source heat pump (ASHP) were the most used for heating in winter. The proportions
362 using AC in bedrooms and living rooms were 63% and 58% respectively. This is in
363 agreement with Ref. [25] and with AC being the most commonly used heating device in
364 this region. In addition, Figure 5 further confirms that residents from the HSCW climate
365 zone do not heat their homes for 24-hours, unlike those in northern zones. There is still a
366 quite large proportion of residents that do not heat their home at all (37% in the bedroom
367 and 57% in the living room, respectively), as seen in Figure 5.

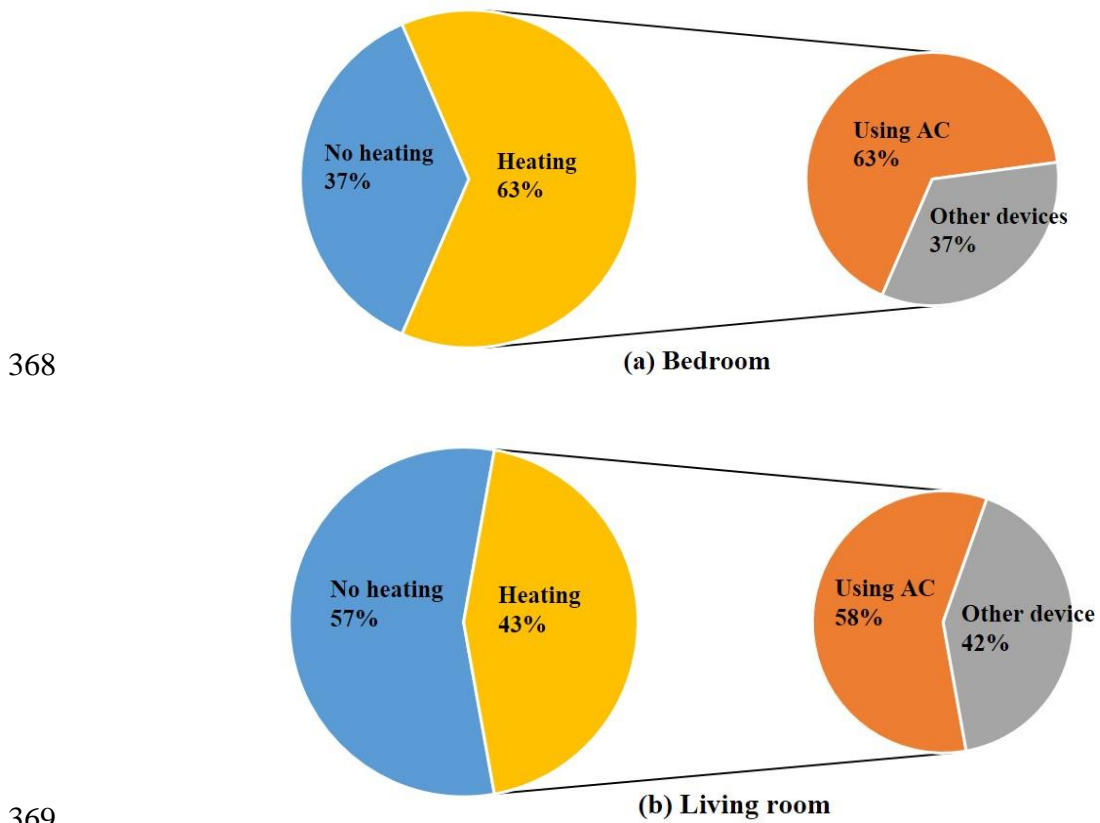


Figure 5: Proportions of heating/no heating in the bedroom and living room

371

372 During the survey, a variety of heating measures were investigated. Apart from AC, Table
373 6 lists the heating devices used by respondents and the corresponding proportions. A
374 variety of heating devices including under-floor heating, oil heaters, radiators, portable
375 electric heaters (infrared heaters, fan heaters, electric blankets) were found in households.
376 However, compared to the AC usage, all these devices accounted for a relatively lower
377 proportion ranging from 1%-14%. Therefore, it is reasonable to infer that, in the long run
378 and with technological development, AC will become the dominant form of heating.

Table 6: Heating devices applied in households in winter


Heating patterns	Bedroom		Living room	
	Cases	Proportion	Cases	Proportion
Air conditioning (AC)	4258	63%%	2424	58%
Underfloor heating	207	3%	154	4%
Oil heating radiant	379	6%	267	6%
Radiator	188	3%	150	4%
Infrared heater	370	5%	607	14%
Fan heater	264	4%	209	5%
Electric blanket	860	13%	43	1%
Other	211	3%	360	9%

379

380 2) Heating setting-point for AC

381 The temperature setting-points significantly affect the heating energy consumption. Figure
382 6 shows the distribution of temperature settings during heating reported by respondents.
383 The sizes of the bubbles represent the sample capacity for reporting each temperature
384 setting point and they are marked in different colors to distinguish four typical family
385 structures. It can be seen that, regardless of family structures, the majority of occupants
386 chose to set the AC temperature within the range 24-28°C, with higher proportions and
387 bigger bubble sizes.

388

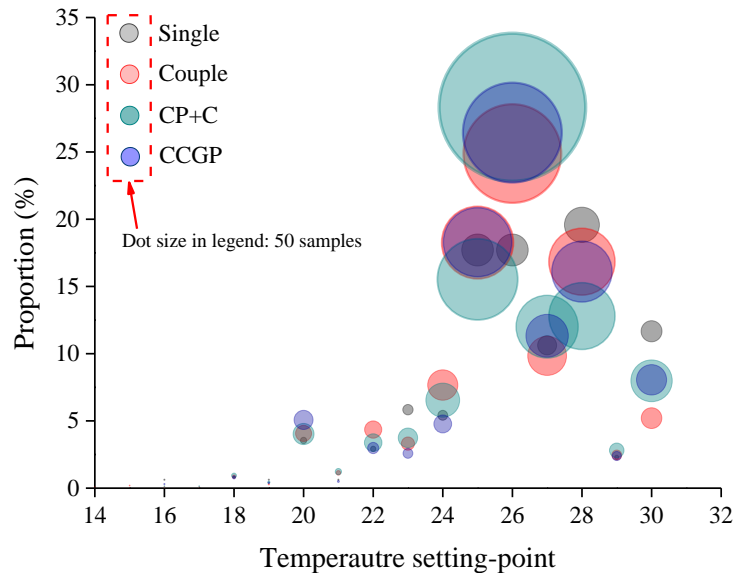

389

390

Figure 6: Temperature setting point distribution with different family structures

391

Figure 7 shows the distribution of temperature setting-points by different family structures.

392

We can clearly see that the mean temperature setting-points in both bedrooms and living

393

rooms are overwhelmingly high, in the range 25-28°C. Though the mean temperature

394

setting points for each of the four family structures are close, the statistical results shows

395

that the factor of family structure has significant effect on the temperature setting-points

396

(ANOVA, $p < 0.05$). Similar trends were found for living rooms. This setting-point

397

temperatures are much higher than those in northern China [39]. Compared to a study from

398

the UK [47], this figure seems unacceptably high. This phenomenon can be explained as

399

being based on the ‘part-time-part-space’ heating style, the room temperature for an

400

unheated room is usually very low (e.g. low indoor temperatures of around 12°C for

401


unheated space in the HSCW area [25]). However, occupants expect a speedy temperature

402

increase when they enter into unheated rooms, which brings us to the next question about

403

how people operate the heating devices.

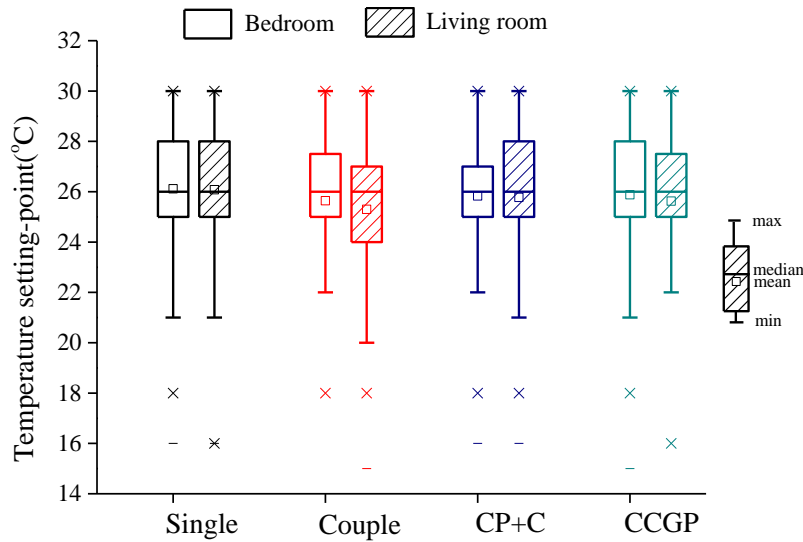

404

405 Figure 7: Temperature setting-points in different room types with different family structures

406

407 3) AC operation behaviors

408 In order to further understand how the urban residents operate AC for heating, Q6 and Q11
 409 specifically ask this question for bedrooms and living rooms. From the survey, 1,989
 410 respondents reported their AC operation modes as seen in Table 7. For bedroom, three
 411 similar modes were almost equally used when occupants slept. That is, nearly 34% of
 412 respondents chose to set a constant temperature all night; 37% of respondents set a timing
 413 mode whilst 29% of respondents used the sleep mode integrated into the AC, indicating
 414 occupants' different individual preferences for using AC modes.

415

Table 7: Operation modes when AC on

Room types	Q6-AC using modes	Cases/proportion
Living room	Set a constant temperature	1989/80%
	Set a high temperature at start and turn down when the room get warm	490/20%
Bedroom	Set a constant temperature all night	1010/34%
	Set a timing mode	1086/37%

416 Note: The sleep mode is an operation algorithm embedded in the AC by manufacturers. The maximum
417 operation time is 8 hours in order to save energy

418 We further explored the temperature setting-points responding to each mode of use and a
419 statistical test was conducted to examine whether the AC modes used by occupants affect
420 the temperature setting points. We counted the distribution of temperature setting-points
421 under each mode of using AC; the results are shown in Table 8. From the table, we can see
422 that for living rooms, when respondents reported they set a high temperature first and then
423 turned it down when the room became warmer, the majority set a temperature higher than
424 26°C (65%). This was similarly remarkable when respondents reported setting a constant
425 temperature in living rooms. The ANOVA test shows a significant difference in living
426 rooms (ANOVA, $p < 0.05$), suggesting that the setting temperature in the living room was
427 significantly affected by occupants' modes of using AC. This was consistent with Table 7
428 which suggests that most occupants set constant temperatures when AC was on.

429 For bedrooms, the trends of temperature setting points under each mode of use were similar
430 to those for living rooms. Regardless of the mode of using AC, a large number of occupants
431 chose to set a temperature of over 26°C, and the proportion was higher than 60%, even up
432 to 67% when the mode of use was to set a constant temperature all night. 60% of
433 respondents chose to set a temperature setting-point over 26°C. Such results explain why
434 the setting points in Figures 6 and 7 were so high.

Table 8: AC mode of use and the corresponding temperature setting points

Room types	AC using modes	Temperature settings(°C)	Cases	Proportion (%)	
Living room.	Set a high temperature at start and turn down when the room gets warm.	<18	1	0%	
		$18 \leq T_{set} < 24$	83	20%	
		$24 \leq T_{set} < 26$	60	15%	
		≥ 26	272	65%	
	Set a constant temperature.	<18	16	1%	
		$18 \leq T_{set} < 24$	296	17%	
		$24 \leq T_{set} < 26$	378	22%	
		≥ 26	1053	60%	
	Bedroom.	Set a constant temperature all night.	<18	3	0%
			$18 \leq T_{set} < 24$	91	10%
			$24 \leq T_{set} < 26$	216	23%
			≥ 26	642	67%
Set a timing mode.		<18	7	1%	
		$18 \leq T_{set} < 24$	135	14%	
		$24 \leq T_{set} < 26$	225	23%	
		≥ 26	605	62%	
Use the sleep mode embedded in the AC.		<18	2	0%	
		$18 \leq T_{set} < 24$	100	13%	
		$24 \leq T_{set} < 26$	181	24%	
		≥ 26	475	63%	

435

436 4) Use of window for fresh air

437 Many scholars have conducted research on occupant window-opening behavior and found
438 that people living in the HSCW climate zone have a habit of opening windows, even in
439 winter [10, 31, 44]. The main driving force of this habit is inferred to be a high demand for
440 fresh air. In this study, Q5 and Q9 explore whether people open windows when they use

441 heating. The results are shown in Table 9. We can clearly see that although the AC was
 442 used for heating, around half of occupants chose to open windows with a small gap, 49%
 443 for the bedroom and 57% for the living room respectively.

Table 9: Window open/close in bedroom and living room when using AC

Window operating modes	Bedroom	Living room
Closed totally.	49%	40%
Open with a small gap.	49%	57%
Open with a big gap.	2%	3%

444 From Figures 6-7 and Table 8, occupants preferred to set high temperatures when using
 445 AC for heating; while Table 9 reveals that occupants tended to open windows during
 446 heating use. Therefore, such occupant behavior is believed to relate to the heating
 447 efficiency in rooms, which may affect the occupants' temperature setting points for AC.
 448 As a result, we analyzed the relationship between the temperature setting-points (Q4/Q7)
 449 and the operation of windows by occupants (Q5/Q9), as shown in Table 10.

450 It can be seen that, whether for bedroom or living room, when the setting temperature
 451 increases, both the proportions for windows open and closed increased. In particular, when
 452 AC was set higher than 26⁰C, the proportion of windows being closed was the highest,
 453 accounting for 65% and 62%. However, there were still high proportions of occupants who
 454 chose to open windows with a small gap, 59% and 61% respectively. By contrast, 59% of
 455 respondents reported a big gap for window opening in bedrooms, and 36% in the living
 456 room. The statistical results show that the temperature setting-points were significantly
 457 affected by the window operations in bedrooms (ANOVA, p<0.05); while no significant
 458 difference was found between temperature setting-points and window operations in living
 459 rooms (ANOVA, p>0.05). This further verified that occupants in this region have a
 460 significant habit of leaving windows open with a gap - small or large - for fresh air when
 461 heating was applied.

Table 10: Relationships between temperature settings of AC and window open/closed

Room types	Temperature settings	Close totally	Open with a small gap	Open with a large gap
Bedroom	<18	1%	1%	0%
	$18 \leq T_{set} < 24$	11%	16%	12%
	$24 \leq T_{set} < 26$	23%	24%	29%
	≥ 26	65%	59%	59%
	Total cases	2079	1889	51
Living room	<18	1%	1%	0
	$18 \leq T_{set} < 24$	16%	19%	12%
	$24 \leq T_{set} < 26$	21%	19%	52%
	≥ 26	62%	61%	36%
	Total cases	1055	1142	25

462

463 3.3 Cluster analysis of occupants' heating-related behaviors

464 In this study, we have confirmed that there are a variety of behaviors relating to winter
465 heating which makes identifying household characteristics in terms of winter heating
466 behavior complex. In order to generalize the characteristics of heating-related behaviors in
467 different households, the cluster analysis method has been applied. This is a method widely
468 employed in field studies to subdivide a set of observations into subsets, where the same
469 clusters are highly similar, meantime, different clusters have low similarity [48]. The two-
470 step clustering analysis takes advantage of using both discrete and continuous variables as
471 inputs and of building clusters with the optimal variables and proportions, hence its use in
472 this analysis.

473 At the first stage, the 'exhaustive search' method is used to select the feature factors that
474 enable the characteristics of occupant behavior related to heating to be represented. Then,
475 during clustering analysis, keeping a 'goodness of fit' and retaining input factors and
476 behaviors were two principles adopted to debug the model. Building a debug model which
477 aims at keeping to these principles forms the second stage. We adopted the logarithmic

478 likelihood method to evaluate the distances between different clusters and the number of
479 clusters referring to the Schwarz Bayes Criterion (BIC Bayesian information criterion).
480 Therefore, the different clusters with different factors were calculated. Accordingly, seven
481 heating-related factors were screened in three clusters, which enabled the features in
482 different clusters to be characterized.

483 Table 11 shows the results of cluster analysis. From Table 11, Cluster 1 was likely to be
484 the working mode, as in this group occupants only or mainly used AC in the evening. This
485 group was matched to behavior modes with shorter ‘AC on’ times (only evening). In
486 addition, occupants in this group tended to keep windows closed in the living room and
487 bedroom when using AC. This indicated that occupants in Cluster 1 have frugal heating-
488 use behaviors. By contrast, Cluster 2 and Cluster 3 show a behavior pattern of being at
489 home all day and having higher proportions of periods when windows are open when using
490 AC, which is different from Cluster 1. The difference between Cluster 2 and Cluster 3 is
491 that people in Cluster 3 depended heavily on AC, and use AC as long as they are in the
492 living room. Besides, occupants in Cluster 3 keep the AC on in bedroom throughout the
493 night until next day, indicating a more luxurious behavior when using AC for household
494 heating. Overall, the cluster analysis in Table 11 identifies seven significant factors
495 affecting heating in rooms and generalizes the behaviors in different groups, which gives
496 us a holistic insight into occupants’ heating-related behaviors and a general profile of
497 clustering occupants’ behavior characteristics.

Table 11: Results of cluster analysis when using AC for heating

No *	Variables included in model	Levels /proportion**		
		Cluster 1	Cluster 2	Cluster 3
1	AC use in living room	Only use when feeling cold/100%	Only use when feeling cold/100%	Use as long as room occupied/100%
2	Heating with/without window opening in bedroom****	AC without window opening/100%	AC with window opening/100%	AC with window opening/51.5%
3	Heating with/without window opening in living room****	AC without window opening gap/74.6%	AC with window opening gap/81.3%	AC with window opening gap/58.8%
4	Use modes of AC before sleep	Keep on till next day/38.1%	Set time off/42.4%	Keep on until next day/45.4%
5	AC temperature set points in bedroom /°C***	26	26	26
6	Presence at home	Evening only/41.4%	All day/42.8%	All day/43.3%
7	AC temperature set points in living room/°C***	26	26	25
Overall proportion/cases		46%/575	39%/493	15%/194

498 *: the order indicates the importance of factors varying from high to low during modeling;
499 **: the proportion means how many cases that are in agreement with the feature of such behavior in
500 this cluster;
501 ***: it is the average value of the investigated cases, instead of the proportion;
502 ****: there are three choices responding to occupant window-opening behaviors. However, for
503 clustering, the two choices where respondents reported opening a window with a small gap and with a
504 big gap were combined as a window opening gap.
505

506 4. Discussion

507 4.1 Appropriate heating modes and policies in the HSCW zone

508 As discussed in the introduction and literature review, the appropriate space heating
509 approach for the HSCW climate zone has been widely argued for a long time. From the
510 statistics and standards, the settings between these two heating modes could be very

511 unbalanced. In Northern China in the Severe Cold and Cold zones, the central heating
512 system provides continuous space heating hot water from stations to radiators for every
513 room, with a very luxurious 24/7 mode during the entire heating period, and the set point
514 temperature is at least 18°C. However, in the HSCW zone, as seen in this survey study, AC
515 is used as the means for winter space heating and is usually available in bedrooms and
516 living rooms, with a part-time mode when the room is occupied, for a shorter cold weather
517 period. Furthermore, although the setting-point temperature for AC could be higher than
518 26°C, it is discussed that studies [24] have still shown the average indoor temperature in
519 reality is only around 15°C for the heated rooms due to the complex factors of equipment
520 efficiency, poor thermal insulation, infiltration, and window-opening habits. Therefore, the
521 potential energy demand in future for better thermal comfort is enormous to achieve the
522 comfort level in the range 18°C to 28°C [3, 49].

523 Comparatively, statistics and data showed that the average heating energy consumption for
524 urban heating in northern China was 15.1kgce/m² in 2016 [39]. For the HSCW zone,
525 current heating energy intensity is proven to be 3.6kWh/m² [24]. However, it is predicable
526 that the average indoor temperature in HSCW winter will be improved to a better condition
527 at 18°C, and it is questionable about what would happen to the overall heating energy
528 consumption in the HSCW zone if the entire heating system was to be rebuilt as a central
529 heating system.

530 This unstoppable demand for indoor thermal comfort improvement could be an extremely
531 ambitious challenge for national policies on energy conservation [47]. Although the current
532 heating energy use intensity is low as 3.6 kWh/m², the current heating method in the HSCW
533 zone - the 'part-time and part space' method - could provide a smoother path towards
534 increasing the energy load given people's requirements for improved thermal comfort [48].
535 Accordingly, focusing on increasing insulation performance and the energy efficiency of
536 equipment based on this method is a widely-proven [50, 51] and better approach to
537 reducing energy waste and carbon emissions rather than changing the whole heating system
538 in this region. Jiang *et al.* [52] once discussed and studied that to achieve the energy
539 conservation and environmental protection objectives set by the national government, the

540 energy benchmark for summer cooling and winter heating in the HSCW zone should be
541 limited within 20kWh/m². As the HSCW zone also has enormous energy demand for
542 summer cooling [9], there is not too much left for the space heating energy increase. If
543 completely copying the northern central heating system to the HSCW zone, the sudden
544 increase in energy consumption could be extremely massive; which is unacceptable. As a
545 result, this study believes that the very ‘luxurious’ central heating system should not be
546 applied to the HSCW zone, instead, improving the current separate heating system is a
547 smarter choice that fits into China’s national development policy. Building design and
548 refurbishment as well as operation management is recommended to refer to the spatial and
549 temporal elements of the end-users’ heating demand.

550 4.2 Outlook of future studies

551 The current study mainly focused on the behaviors and measures taken by occupants at
552 homes to improve and adapt to the indoor thermal environments in winter, providing a
553 general profile of heating situations in residential buildings in this region. The diverse
554 demographic factors (eg., age, numbers), building characteristics (e.g., construction ages,
555 insulation, air infiltration), socio-economic factors (e.g. family incomes), are exclusively
556 considered in our analysis. In fact, they are various driving factors underlying the
557 occurrence of a certain heating behavior of occupants. For example, the family structure
558 plays dominant role affecting the heating behaviors that as a whole, the behaviors of one
559 resident would be affected by family members. Family incomes was also a key determining
560 the use patterns and intensity of heating [48]. Moreover, since the heating patterns and
561 devices vary in homes, the factors and motivations changed over time, thus influencing the
562 heating behaviors and future energy use intentions in this region [31]. Given that the large-
563 scale survey mainly focuses on observation of the phenomena, we have conducted more
564 in-depth focus group interviews and surveys in small samples, aiming to exploring the
565 motivations, preferences, ect., and explaining the reasons behind theses heating related
566 behaviors. In addition, considering that occupant heating-related regulations may be
567 affected by the temporal-special usage patterns, demographic factors as well as their
568 impacts on energy consumption, the use behaviors for AC by residents, including

569 temperature setting, modes, durations, indoor and outdoor temperatures have been
570 monitoring in several demonstration households of this region; the data results, however,
571 are our undergoing research works, which would be presented in future.

572 Research on holistic solutions for winter heating specifically suitable for this region should
573 not only consider performance improvements in the building passive technologies and
574 energy devices and systems, but also consider the operation strategies (people's usage
575 behaviors) and real comfort demands, in order to efficiently use energy for winter heating.
576 Heating energy modeling is important for the energy prediction at the domestic stock level.
577 The findings of this study of occupant behavior patterns for different clustered groups have
578 been incorporated into the modeling in our present research work and provided more
579 realistic boundary settings in models, to optimize the solutions for passive technologies for
580 new buildings and existing buildings and balance the multiple objectives of thermal
581 comfort and energy consumption quota. This is believed to allow predictions of different
582 energy demands and the possible energy-saving potential during heating periods in this
583 region.

584 The current study pays attentions to residents' related features affecting heating in winter.
585 Notably, the building envelope characteristics indeed play dominant roles on heating
586 choices and energy outcomes. For example, the thermal performance and air tightness of
587 existing buildings are poor in this region, and the insulation levels in terms of U-value that
588 suits the region are expected to be clear. The solutions to solve the air infiltration arising
589 from the habit of leaving windows open to allow a gap for fresh air should be a research
590 focus. Sensor technologies can be applied to provide occupants with information on
591 internal air temperature, humidity, and CO₂ concentration which will help achieve
592 appropriate operation. Fresh air supply devices should be compulsory when air-tightness
593 is implemented. Energy policy codes for energy-efficient design specifically for this region
594 should be updated based on in-depth studies.

595 5. Conclusions

596 This study developed a holist method to conduct a large-scale field survey on winter
597 heating in domestic homes in the hot summer and cold winter climate zone in the Yangtze
598 River region. The method is rigorous in terms of determination of location, community
599 area, sampling size, and questionnaire design. A set of valid 8,471 sets of questionnaires
600 were collected from the five capital/municipality cities namely, Chengdu, Chongqing,
601 Changsha, Hangzhou, and Shanghai, covering the upper, middle and downstream regions
602 of the Yangtze River. The distribution of the sample size of building construction ages is
603 consistent with that of the China National Bureau of Statistics, which confirms the
604 representativeness of this survey. The main outcomes from the survey can be summarized
605 as follows:

606 (1) There is a high correlation between the size of the family structure and the size of
607 dwelling; the more family members, the bigger the dwelling;

608 (2) The winter heating for homes does not reach full capacity. Only 63% reported heating
609 the bedroom and 43% reported heating living rooms.

610 (3) Air conditioners (called AC) is the major device that is popularly used for winter
611 heating in the hot summer and cold winter climate zone, indeed AC accounts for 63%
612 of bedroom and 58% of living room heating. The remaining uses include a large variety
613 of devices e.g. under-floor heating, oil heaters, radiators, electric heaters, etc., but the
614 proportions are relatively low, about 1% (electric blanket) to 14% (infrared heater).

615 (4) Urban residents in this region heat their home in ways that are highly dependent on
616 their occupancy of space. This means the heating usage is intermittent as a kind of
617 ‘part-time-part-space’, which is completely different to the heating mode involving a
618 central heating system with continuing operation in northern China.

619 (5) The temperature setting-point of AC is around 26°C, with statistically significant
620 differences among different family structures. This does not mean the room
621 temperatures reach 26 °C. The high temperature setting is mainly due to the AC usage

622 patterns: 80% of occupants set a constant temperature in the living room but tended to
623 set a timing mode (37%) or use the sleep mode (29%) in the bedroom.

624 (6) People living in this region have a strong demand for fresh air, with nearly half of
625 occupants opening the windows to provide a gap in winter when using heating. The
626 proportions of window close/open increase with increasing temperature setting points
627 when the AC is operating, indicating a coupled interaction of heating-related behaviors
628 by occupants.

629 (7) The two-step clustering analysis classifies three clusters of heating-related behaviors
630 using seven significant factors: occupants in Cluster 1 only or mainly used AC in the
631 evening, matching to a shorter time when the AC is on and keeping windows closed
632 when using AC, which indicated a frugal heating use behavior. Cluster 2 and Cluster 3
633 have higher proportions of window opening when using AC and people in Cluster 3
634 depended heavily on AC, using it as long as they are in the living room and keeping
635 the AC on during the whole night, which indicates a more luxurious behavior for AC
636 household heating.

637 Acknowledgement

638 The research is supported by the China National Key R&D Programme ‘Solutions to
639 Heating and Cooling of Buildings in the Yangtze River Region’ SSHCool project [Grant
640 No. 2016YFC0700300/1] and the China Fundamental Research Funds for the Central
641 Universities [Grant No. 2018CDJDCH0015]. The research work is also related to the UK-
642 China collaborative research project ‘Low carbon climate-responsive Heating and Cooling
643 of Cities (LoHCool)’ supported by the National Natural Science Foundation of China
644 [NSFC Grant No. 51561135002] and the UK Engineering and Physical Sciences Research
645 Council [EPSRC Grant No. EP/N009797/1]. The authors would like to thank people,
646 including Ruofei Liang, Bo Li, Xin Zhang, Yue Zhang, Fanbin Zeng, Yiwen Yan, Yan Li,
647 Shangyan Wu, Yifan Li, Yuyi Fu, Fei Ren from Chongqing University, Xinzhen Wang
648 from Zhejiang University, Yang He, Huixin Hu, Yuan Song from Tongji University, Min

649 Zheng from Sichuan Institute of Building Research, Sihui Li, Yutong Tan from Hunan
650 University, who assisted survey and data collection.

651

652 References

653 [1] Chinese Plan Publication House, "GB 50178, Standard of Climate Regionalization for
654 Architecture," ed. Beijing, 1993.

655 [2] B. Li, R. Yao, Q. Wang, and Y. Pan, "An introduction to the Chinese Evaluation Standard for
656 the indoor thermal environment," *Energy and Buildings*, vol. 82, pp. 27-36, 2014.

657 [3] B. Li, C. Du, R. Yao, W. Yu, and V. Costanzo, "Indoor thermal environments in Chinese
658 residential buildings responding to the diversity of climates," *Applied Thermal Engineering*, vol.
659 129, pp. 693-708, 2018.

660 [4] National Bureau of Statistics of China. (2016). *China population statistics*. Available:
661 <http://data.stats.gov.cn>

662 [5] C. Peng, D. Yan, S. Guo, S. Hu, and Y. Jiang, "Building energy use in China: ceiling and
663 scenario," *Energy and Buildings*, vol. 102, pp. 307-316, 2015.

664 [6] H. Xiao, Q. Wei, and Y. Jiang, "The reality and statistical distribution of energy consumption
665 in office buildings in China," *Energy and Buildings*, vol. 50, pp. 259-265, 2012.

666 [7] S. Hu, D. Yan, Y. Cui, and S. Guo, "Urban residential heating in hot summer and cold winter
667 zones of China—Status, modeling, and scenarios to 2030," *Energy Policy*, vol. 92, pp. 158-170,
668 2016.

669 [8] Z. Wang, Z. Zhao, B. Lin, Y. Zhu, and Q. Ouyang, "Residential heating energy consumption
670 modeling through a bottom-up approach for China's Hot Summer–Cold Winter climatic region,"
671 *Energy and Buildings*, vol. 109, pp. 65-74, 2015.

672 [9] Ministry of Housing and Urban-Rural Development of the People's Republic of China, "JGJ
673 134-2010, Design standard for energy efficiency of residential buildings in hot summer and cold
674 winter zone," ed. Beijing: MOHURD, 2010.

675 [10] B. Lin, Z. Wang, Y. Liu, Y. Zhu, and Q. Ouyang, "Investigation of winter indoor thermal
676 environment and heating demand of urban residential buildings in China's hot summer – Cold
677 winter climate region," *Building and Environment*, vol. 101, pp. 9-18, 2016.

678 [11] Z. Wang, J. Zhang, and D. Zhang, "Global zoning for landscape plant introduction with the
679 method of fuzzy analogy preferred ratio to Shanghai, China," *Landsc. Archit*, vol. 28, no. 1, 2012.

680 [12] L. Xu, J. Liu, J. Pei, and X. Han, "Building energy saving potential in Hot Summer and Cold
681 Winter (HSCW) Zone, China—Influence of building energy efficiency standards and
682 implications," *Energy Policy*, vol. 57, pp. 253-262, 2013.

- 683 [13] C. Su, H. Madani, and B. Palm, "Heating solutions for residential buildings in China: Current
684 status and future outlook," *Energy Conversion and Management*, vol. 177, pp. 493-510, 2018.
- 685 [14] FinancePeople.com. (2014). *District heating in southern China is inappropriate*. Available:
686 <http://finance.people.com.cn/GB/8215/356561/373167/>
- 687 [15] Xinhua News Agency. (2015). *Xinhua News Agency: "Southern heating" has become a
688 consensus, and there are still differences in concentration or dispersion*. Available:
689 https://www.thepaper.cn/newsDetail_forward_1397388
- 690 [16] T. Huo *et al.*, "China's energy consumption in the building sector: A Statistical Yearbook-
691 Energy Balance Sheet based splitting method," *Journal of Cleaner Production*, vol. 185, pp. 665-
692 679, 2018.
- 693 [17] S. Hu, D. Yan, J. An, S. Guo, and M. Qian, "Investigation and analysis of Chinese residential
694 building occupancy with large-scale questionnaire surveys," *Energy and Buildings*, vol. 193, pp.
695 289-304, 2019.
- 696 [18] Tsinghua University Building Energy Research Center, *2013 Annual Report on China
697 Building Energy Efficiency*. Beijing: China Architecture & Building Press, 2013.
- 698 [19] D. Yan *et al.*, "Occupant behavior modeling for building performance simulation: Current state
699 and future challenges," *Energy and Buildings*, vol. 107, pp. 264-278, 2015.
- 700 [20] O. G. Santin, L. Itard, and H. Visscher, "The effect of occupancy and building characteristics
701 on energy use for space and water heating in Dutch residential stock," *Energy and buildings*, vol.
702 41, no. 11, pp. 1223-1232, 2009.
- 703 [21] V. Cheng and K. Steemers, "Modelling domestic energy consumption at district scale: A tool
704 to support national and local energy policies," *Environmental Modelling & Software*, vol. 26, no.
705 10, pp. 1186-1198, 2011.
- 706 [22] H. Yang, B. H. Yan, C. Sun, and G. Q. Xia, "Study on the Behavior Energy-Saving of the Heat
707 Users of Central Heating System," in *Advanced Materials Research*, 2013, vol. 608, pp. 1194-
708 1197: Trans Tech Publ.
- 709 [23] G. Nair, L. Gustavsson, and K. Mahapatra, "Factors influencing energy efficiency investments
710 in existing Swedish residential buildings," *Energy Policy*, vol. 38, no. 6, pp. 2956-2963, 2010.
- 711 [24] J. K. Day and D. E. Gunderson, "Understanding high performance buildings: The link between
712 occupant knowledge of passive design systems, corresponding behaviors, occupant comfort and
713 environmental satisfaction," *Building and Environment*, vol. 84, pp. 114-124, 2015.
- 714 [25] S. Guo, D. Yan, C. Peng, Y. Cui, X. Zhou, and S. Hu, "Investigation and analyses of residential
715 heating in the HSCW climate zone of China: Status quo and key features," *Building and
716 Environment*, vol. 94, pp. 532-542, 2015.
- 717 [26] S. D'Oca, V. Fabi, S. P. Corgnati, and R. K. Andersen, "Effect of thermostat and window
718 opening occupant behavior models on energy use in homes," *Building Simulation*, vol. 7, no. 6, pp.
719 683-694, 2014.

- 720 [27] R. Fritsch, A. Kohler, M. Nygård-Ferguson, and J.-L. Scartezzini, "A stochastic model of user
721 behaviour regarding ventilation," *Building and Environment*, vol. 25, no. 2, pp. 173-181, 1990.
- 722 [28] G. Y. Yun, J. Choi, and J. T. Kim, "Energy performance of direct expansion air handling unit
723 in office buildings," *Energy and Buildings*, vol. 77, pp. 425-431, 2014.
- 724 [29] Y. Wang, J. Kuckelkorn, F.-Y. Zhao, D. Liu, A. Kirschbaum, and J.-L. Zhang, "Evaluation on
725 classroom thermal comfort and energy performance of passive school building by optimizing
726 HVAC control systems," *Building and Environment*, vol. 89, pp. 86-106, 2015.
- 727 [30] J. Ouyang and K. Hokao, "Energy-saving potential by improving occupants' behavior in urban
728 residential sector in Hangzhou City, China," *Energy and buildings*, vol. 41, no. 7, pp. 711-720,
729 2009.
- 730 [31] Y. Cui, D. Yan, and C.-f. Chen, "Exploring the factors and motivations influencing heating
731 behavioral patterns and future energy use intentions in the hot summer and cold winter climate zone
732 of China," *Energy and Buildings*, vol. 153, pp. 99-110, 2017.
- 733 [32] V. Fabi, R. V. Andersen, S. Corgnati, and B. W. Olesen, "Occupants' window opening
734 behaviour: A literature review of factors influencing occupant behaviour and models," *Building
735 and Environment*, vol. 58, pp. 188-198, 2012.
- 736 [33] T. Hong, D. Yan, S. D'Oca, and C.-f. Chen, "Ten questions concerning occupant behavior in
737 buildings: The big picture," *Building and Environment*, vol. 114, pp. 518-530, 2017.
- 738 [34] H. Yoshino *et al.*, "Indoor thermal environment of urban residential buildings in China: winter
739 investigation in five major cities," *Energy and buildings*, vol. 36, no. 12, pp. 1227-1233, 2004.
- 740 [35] C. Peng, D. Yan, R. Wu, C. Wang, X. Zhou, and Y. Jiang, "Quantitative description and
741 simulation of human behavior in residential buildings," *Building Simulation*, vol. 5, no. 2, pp. 85-
742 94, 2011.
- 743 [36] J. Ge, J. Wu, S. Chen, and J. Wu, "Energy efficiency optimization strategies for university
744 research buildings with hot summer and cold winter climate of China based on the adaptive thermal
745 comfort," *Journal of Building Engineering*, vol. 18, pp. 321-330, 2018.
- 746 [37] S. Chen, N. Li, J. Guan, Y. Xie, F. Sun, and J. Ni, "A statistical method to investigate national
747 energy consumption in the residential building sector of China," *Energy and Buildings*, vol. 40, no.
748 4, pp. 654-665, 2008.
- 749 [38] C. A. Moser and G. Kalton, *Survey methods in social investigation*. Routledge, 2017.
- 750 [39] Ministry of Housing and Urban-Rural Development of the People's Republic of China, "GB
751 50736-2012, Design code for heating ventilation and air conditioning of civil buildings," ed.
752 Beijing: MOHURD, 2012.
- 753 [40] C. Liu *et al.*, "High resolution mapping of overheating and mortality risk," vol. 122, pp. 1-14,
754 2017.

- 755 [41] R. V. Krejcie and D. W. Morgan, "Determining sample size for research activities,"
756 *Educational and psychological measurement*, vol. 30, no. 3, pp. 607-610, 1970.
- 757 [42] A. N. Oppenheim, *Questionnaire design, interviewing and attitude measurement*. Bloomsbury
758 Publishing, 2000.
- 759 [43] P. Hoes, J. Hensen, M. Loomans, B. De Vries, and D. Bourgeois, "User behavior in whole
760 building simulation," *Energy and buildings*, vol. 41, no. 3, pp. 295-302, 2009.
- 761 [44] H. Liu, Y. Wu, B. Li, Y. Cheng, and R. Yao, "Seasonal variation of thermal sensations in
762 residential buildings in the Hot Summer and Cold Winter zone of China," *Energy and Buildings*,
763 vol. 140, pp. 9-18, 2017.
- 764 [45] N. H. Nie, D. H. Bent, and C. H. Hull, *SPSS: Statistical package for the social sciences*.
765 McGraw-Hill New York, 1975.
- 766 [46] C. Kothari, "Research Methodology methods and techniques second edition," ed: New Age,
767 2017.
- 768 [47] M. Shipworth, "Thermostat settings in English houses: No evidence of change between 1984
769 and 2007," *Building and Environment*, vol. 46, no. 3, pp. 635-642, 2011.
- 770 [48] J. An, D. Yan, and T. Hong, "Clustering and statistical analyses of air-conditioning intensity
771 and use patterns in residential buildings," *Energy and Buildings*, vol. 174, pp. 214-227, 2018.
- 772 [49] ASHRAE, "ASHRAE Standard 55, thermal environmental conditions for human occupancy,,"
773 Atlanta: American Society of Heating, Refrigerating and Air-Conditioning Engineers Inc, Atlanta,
774 2013.
- 775 [50] T. Huo, H. Ren, and W. Cai, "Estimating urban residential building-related energy
776 consumption and energy intensity in China based on improved building stock turnover model," *Sci*
777 *Total Environ*, vol. 650, no. Pt 1, pp. 427-437, Feb 10 2019.
- 778 [51] China Association of Building Energy Efficiency. Research Report of China Building Energy
779 Consumption 2016 [Online]. Available: [http://www.efchina.org/Attachments/Report/report-
780 20170710-1/report-20170710-1](http://www.efchina.org/Attachments/Report/report-20170710-1/report-20170710-1)
- 781 [52] J. Yi, *Concept Debate for China's Building Energy Conservation*. Beijing: China
782 Architecture & Building Press, 2016.

783

784

785 Questionnaire contents

786 Part 1: Questions of Basic information of respondents and buildings

787 Questions of Basic building information

788 Q1: Family structure (single choice):

789 Single

790 Couple

791 Couple with a Child

792 Couple with Child and the elderly

793 Others _____ *

794

795 Q2: Home time (multiple choice):

796 Morning (7:00-12:00)

797 Noon (12:00-14:00)

798 Afternoon (14:00-18:00)

799 Evening (18:00-7:00)

800

801 Q3: Dwelling structure (single choice):

802 One bedroom

- 803 Two bedrooms
- 804 Three bedrooms
- 805 Four bedrooms
- 806 Others _____ *

807 Part 2: Questions of Heating behaviors

808 (*the following behaviors were limited to weekdays)

809 Section 1. Questions for Bedroom

810 Q4: Whether or not you heat your bedroom? ***【if not, please skip】***

811 Not at all

812 If Yes, please tick the box that is relevant to your heating measures:

813 Air conditioning, temperature, with setting-point _____ °C*

814 Underfloor heating, with

815 temperature setting-point _____ °C when room occupied*;

816 temperature setting-point _____ °C when nobody at home*;

817 *(If you turn off underfloor heating when nobody is in the bedroom please write “0”)*

818 *(multiple choice)*

819 Oil heater

820 Heating radiator

821 Infrared heating

822 Fan heater

823 Electric blanket

824 Other _____ *

825

826 Q5: What is the status of door or window in your bedroom when heating is in
827 operation? (single choice)

828 Closed

829 Open with a small gap

830 Open with a big gap

831

832 Q6: How do you set the air-conditioning operation mode? (single choice)

833 Sleep mode

834 Keep on until next day

835 Setting time shutdown_____ (how many hours) *

836 Don't operate air conditioning

837 Other _____ *

838

839

840 Section 2. Questions for Living Room (contains the *study*)

841 Q7: Do you heat your living room? ***【if not, please skip】***

842 Not at all

843 Yes; Please tick the box that is relevant to your heating measures:

844 air conditioning, setting-point was _____ °C*

845 underfloor heating,

846 temperature set point _____ °C when room occupied*

847 temperature set point _____ °C when nobody at home*

848 *(If you turn off underfloor heating when nobody is in the living room please write "0")*

849 *(multiple choice)*

850 Oil heater

851 Heating radiator

852 Infrared heating

853 Fan heater

854 Electric blanket

855 Other _____ *

856

857 Q8: Your family members' clothing adjustment behaviors: (single choice)

858 Adding clothes to reduce heating dependence

859 Relying on heating rather than clothing adjustment

860

861 Q9: The usual status of doors or windows in your living room when occupier
862 heating is 'On': (single choice)

863 Closed

864 Open with a small gap

865 Open with a big gap

866

867 Q10: Occasions of air condition usage in the living room: (single choice)

868 *(If heating mode doesn't include air conditioning, this question can be skipped)*

869 Use air conditioning as long as occasion room occupied

870 Use air conditioning when feeling cold

871

872 Q11: Habits of air condition usage in the living room: (single choice)

873 *(If heating mode doesn't include air conditioning, this question can be skipped)*

874 Set a high temperature for rapid warming, then lower it when room heats up

875 Set constant temperature

876 Other _____ *

877

878

879 Section 3. Questions for Fresh Air

880 Q12: The usual status of doors or windows in your bedroom when no heating:

881 (single choice)

882 Closed

883 Open with a small gap

884 Open with a big gap

885

886 Q13: Your family members' habits of window operation: (single choice)

887 Ventilation based on the weather

888 Ventilation based on indoor air quality

889 Ventilation based on daily habits

890

891