

# *A Galerkin boundary element method for high frequency scattering by convex polygons*

Article

Published Version

Chandler-Wilde, S. N. ORCID: <https://orcid.org/0000-0003-0578-1283> and Langdon, S. (2007) A Galerkin boundary element method for high frequency scattering by convex polygons. SIAM Journal on Numerical Analysis (SINUM), 45 (2). pp. 610-640. ISSN 0036-1429 doi: [10.1137/06065595X](https://doi.org/10.1137/06065595X) Available at <https://centaur.reading.ac.uk/924/>

It is advisable to refer to the publisher's version if you intend to cite from the work. See [Guidance on citing](#).

Published version at: <http://dx.doi.org/10.1137/06065595X>

To link to this article DOI: <http://dx.doi.org/10.1137/06065595X>

Publisher: Society for Industrial and Applied Mathematics

All outputs in CentAUR are protected by Intellectual Property Rights law, including copyright law. Copyright and IPR is retained by the creators or other copyright holders. Terms and conditions for use of this material are defined in the [End User Agreement](#).

[www.reading.ac.uk/centaur](http://www.reading.ac.uk/centaur)

**CentAUR**

Central Archive at the University of Reading

Reading's research outputs online

## A GALERKIN BOUNDARY ELEMENT METHOD FOR HIGH FREQUENCY SCATTERING BY CONVEX POLYGONS\*

S. N. CHANDLER-WILDE<sup>†</sup> AND S. LANGDON<sup>†</sup>

**Abstract.** In this paper we consider the problem of time-harmonic acoustic scattering in two dimensions by convex polygons. Standard boundary or finite element methods for acoustic scattering problems have a computational cost that grows at least linearly as a function of the frequency of the incident wave. Here we present a novel Galerkin boundary element method, which uses an approximation space consisting of the products of plane waves with piecewise polynomials supported on a graded mesh, with smaller elements closer to the corners of the polygon. We prove that the best approximation from the approximation space requires a number of degrees of freedom to achieve a prescribed level of accuracy that grows only logarithmically as a function of the frequency. Numerical results demonstrate the same logarithmic dependence on the frequency for the Galerkin method solution. Our boundary element method is a discretization of a well-known second kind combined-layer-potential integral equation. We provide a proof that this equation and its adjoint are well-posed and equivalent to the boundary value problem in a Sobolev space setting for general Lipschitz domains.

**Key words.** Galerkin boundary element method, high frequency scattering, convex polygons, Helmholtz equation, large wave number, Lipschitz domains

**AMS subject classifications.** 35J05, 65R20

**DOI.** 10.1137/06065595X

**1. Introduction.** The scattering of time-harmonic acoustic waves by bounded obstacles is a classical problem that has received much attention in the literature over the years. Much effort has been put into the development of efficient numerical schemes, but an outstanding question yet to be fully resolved is how to achieve an accurate approximation to the scattered wave with a reasonable computational cost in the case that the scattering obstacle is large compared to the wavelength of the incident field.

The standard boundary or finite element method approach is to seek an approximation to the scattered field from a space of piecewise polynomial functions. However, due to the oscillatory nature of the solution, such an approach suffers from the limitation that a fixed number of degrees of freedom  $K$  are required per wavelength in order to achieve a good level of accuracy, with the accepted guideline in the engineering literature being to take  $K = 10$  (see, e.g., [53] and the references therein). A further difficulty, at least for the finite element method, is the presence of “pollution errors,” phase errors in wave propagation across the domain, which can lead to even more severe restrictions on the value of  $K$  when the wavelength is short [9, 39].

Let  $L$  be a linear dimension of the scattering obstacle, and set  $k = 2\pi/\lambda$ , where  $\lambda$  is the wavelength of the incident wave, so that  $k$  is the wave number, proportional to the frequency of the incident wave. Then a consequence of fixing  $K$  is that the number of degrees of freedom will be proportional to  $(kL)^d$ , where  $d = N$  in the case of the finite element method,  $d = N - 1$  in the case of the boundary element method,

---

\*Received by the editors March 31, 2006; accepted for publication (in revised form) October 20, 2006; published electronically April 3, 2007.

<http://www.siam.org/journals/sinum/45-2/65595.html>

<sup>†</sup>Department of Mathematics, University of Reading, Whiteknights, PO Box 220, Berkshire RG6 6AX, UK (s.n.chandler-wilde@reading.ac.uk, s.langdon@reading.ac.uk). The work of the second author was supported by a Leverhulme Trust Early Career Fellowship.

and  $N = 2$  or  $3$  is the number of space dimensions of the problem. Thus, as either the frequency of the incident wave or the size of the obstacle grows, so does the number of degrees of freedom, and hence the computational cost of the numerical scheme. As a result, the numerical solution of many realistic physical problems is intractable using current technologies. In fact, for some of the most powerful recent algorithms for three-dimensional (3D) scattering problems (e.g., [13, 21]), the largest obstacles for which numerical results have been reported have diameter not more than a few hundred times the wavelength.

For boundary element methods, the cost of setting up and solving the large linear systems which arise can be reduced substantially through a combination of preconditioned iterative methods [4, 22, 36] combined with fast matrix-vector multiply methods based on the fast multipole method [5, 26, 21] or the FFT [13]. However, this does nothing to reduce the growth in the number of degrees of freedom as  $kL$  increases (linear with respect to  $kL$  in two dimensions, quadratic in three dimensions). Thus computations become infeasible as  $kL \rightarrow \infty$ .

**1.1. Reducing the number of degrees of freedom for  $kL$  large.** To achieve a dependence of the number of degrees of freedom on  $kL$  which is lower than  $(kL)^d$ , it seems essential to use an approximation space better able to replicate the behavior of the scattered field at high frequencies than piecewise polynomials. To that end, much attention in the recent literature has focused on enriching the approximation space with oscillatory functions, specifically plane waves or Bessel functions.

A common approach (see, e.g., [8, 16, 27, 37, 53]) is to form an approximation space consisting of standard finite element basis functions multiplied by plane waves travelling in a large number of directions, approximately uniformly distributed on the unit circle (in two dimensions) or sphere (in three dimensions). Theoretical analysis (e.g., [8]) and computational results (e.g., [53]) suggest that these methods converge rapidly as the number of plane wave directions increases, with a significant reduction in the number of degrees of freedom required per wavelength, compared to standard finite and boundary element methods. But the number of degrees of freedom is still proportional to  $(kL)^d$ , and serious conditioning problems occur when the number of plane wave directions is large.

A related idea is to attempt to identify the important wave propagation directions at high frequencies, and to incorporate the oscillatory part of this high frequency asymptotic behavior into the approximation space. This is the idea behind the finite element method of [34] and the boundary element methods of [25, 19, 12, 33, 45]. This idea has been investigated most thoroughly in the case that the scattering obstacle is smooth and strictly convex. In this case the leading order oscillatory behavior is particularly simple on the boundary of the scattering obstacle, so that this approach is perhaps particularly well adapted for boundary element methods. If a direct integral equation formulation is used, in which the solution to be determined is the trace of the total field or its normal derivative on the boundary, the most important wave direction to include is that of the incident wave (see, e.g., [1, 25, 12, 28]). This approach is equivalent, in the case of a sound hard scatterer, to approximating the ratio of the total field to the incident field, with physical optics predicting that this ratio is approximately constant on the illuminated side and approximately zero on the shadow side of the obstacle at high frequencies.

In [1], Abboud, Nédélec, and Zhou consider the two-dimensional (2D) problem of scattering by a smooth, strictly convex obstacle. They suggest that the ratio of the scattered field to the incident field can be approximated with error of order

$N^{-\nu} + ((kL)^{1/3}/N)^{\nu+1}$  using a uniform mesh of piecewise polynomials of degree  $\nu$ , so that the total number of degrees of freedom  $N$  need be proportional only to  $(kL)^{1/3}$  in order to maintain a fixed level of accuracy. In fact, this paper appears to be the first in which the dependence of the error estimates on the wave number  $k$  is indicated, and the requirement that the number of degrees of freedom is proportional to  $(kL)^{1/3}$  is a big improvement over the usual requirement for proportionality to  $kL$ . This approach is coupled with a fast multipole method in [25], where impressive numerical results are reported for large scale 3D problems.

The same approach is combined with a mesh refinement concentrating degrees of freedom near the shadow boundary in [12]. The numerical results in [12] for scattering by a circle suggest that, with this mesh refinement, both the number of degrees of freedom and the total computational cost required to maintain a fixed level of accuracy remain constant as  $kL \rightarrow \infty$ . The method of [12] has recently been applied to deal with each of the multiple scatters which occur when a wave is incident on two, separated, smooth convex 2D obstacles [33]. Numerical experiments have also recently been presented in [29], where the convergence of this iterative approach to the multiple scattering problem is analyzed.

In [28] a numerical method in the spirit of [12] is proposed, namely a  $p$ -version boundary element method with a  $k$ -dependent mesh refinement in a transition region around the shadow boundary. A rigorous error analysis, which combines estimates using high frequency asymptotics of derivatives of the solution on the surface with careful numerical analysis, demonstrates that the approximation space is able to represent the oscillatory solution to any desired accuracy provided the number of degrees of freedom increases approximately in proportion to  $(kL)^{1/9}$  as  $kL$  increases. And, in fact, numerical experiments in [28], using this approximation space as the basis of a Galerkin method, suggest that a prescribed accuracy can be achieved by keeping the number of degrees of freedom fixed as the wave number increases.

The boundary element method and its analysis that we will present in this paper for the problem of scattering by a convex polygon are most closely related to our own recent work [19, 45] on the specific problem of 2D acoustic scattering by an inhomogeneous, piecewise constant impedance plane. In [19, 45] a Galerkin boundary element method for this problem is proposed, in which the leading order high frequency behavior as  $k \rightarrow \infty$ , consisting of the incident and reflected ray contributions, is first subtracted off. The remaining scattered wave, consisting of rays diffracted by discontinuities in impedance, is expressed as a sum of products of oscillatory and nonoscillatory functions, with the nonoscillatory functions being approximated by piecewise polynomials supported on a graded mesh, with larger elements away from discontinuities in impedance. For the method in [19] it was shown in that paper that the number of degrees of freedom needed to maintain accuracy as  $k \rightarrow \infty$  grows only logarithmically with  $k$ . This result was improved in [45], where it was shown, via sharper regularity results and a modified mesh, that for a fixed number of degrees of freedom the error is bounded independently of  $k$ .

**1.2. The oscillatory integral problem.** In the above paragraphs we have reviewed methods for reducing the dependence on  $k$  of the number of degrees of freedom necessary to achieve a required accuracy. Indeed some of the methods we have described above [12, 45, 33, 28] appear, in numerical experiments, to require only a number of degrees of freedom  $M = O(1)$  as  $k \rightarrow \infty$ . Further, for one specific scattering problem [45] this has been shown by a rigorous numerical analysis. However, it should be emphasised strongly that this is not the end of the story;  $M = O(1)$  as  $k \rightarrow \infty$

does not imply a computational cost which is  $O(1)$  as  $k \rightarrow \infty$ . The reason is that, while  $M$  fixed implies a fixed size of the approximating linear system, the matrix entries become increasingly difficult to evaluate, at least by conventional quadrature methods, as  $k \rightarrow \infty$ . This observation is perhaps particularly true for boundary integral equation based methods where the difficulty arises from the high frequency behavior of both the oscillatory basis functions (necessary to keep  $M$  fixed as  $k \rightarrow \infty$ ) and the oscillatory kernels of the integral operators. As a consequence, each matrix entry is a highly oscillatory integral when  $k$  is large. We discuss only briefly in this paper the effective evaluation of the matrix entries in the Galerkin method we will propose, referring the reader to [44] for most of the details. And the methods we describe in [44] are  $O(1)$  in computational cost as  $k \rightarrow \infty$  for many but not all of the matrix entries, so that further work is required to make the algorithm we will propose fully effective at high frequency. But we note that, of the papers cited above, only the methods of Bruno et al. [12], Geuzaine, Bruno, and Reitich [33], and Langdon and Chandler-Wilde [45] appear to achieve an  $O(1)$  computational cost as  $k \rightarrow \infty$ .

The issue in evaluating the matrix entries is one of numerical evaluation of oscillatory integrals. In Bruno et al. this is achieved by a “localized integration” strategy described in [12]. This strategy might be termed a “numerical method of stationary phase,” in which the integrals are approximated by localized integrals over small, wave number-dependent neighborhoods of the stationary points of the oscillatory integrand. A similar strategy for integrals of the same type arising in high frequency boundary integral methods for 3D problems is developed in [32]. Promising alternative approaches are two older methods for oscillatory integrals due to Filon [31] (recently reanalyzed by Iserles [40, 41]; see [6] for a discussion of its application to the matrix entries in a high frequency collocation boundary element method) and Levin [47], and methods based on deformation of paths of integration into the complex plane to steepest descent paths [38]. We note that, in contrast to [12, 33, 6], where Nyström/collocation methods are used and the oscillatory integrals are one-dimensional, the matrix entries in our Galerkin methods are, of course, 2D oscillatory integrals, so that development of a robust method for their evaluation is a harder problem.

**1.3. The main results of the paper.** In this paper, we consider specifically the problem of scattering by convex polygons. This is, in at least one respect, a more challenging problem than the smooth convex obstacle since the corners of the polygon give rise to strong diffracted rays which illuminate the shadow side of the obstacle much more strongly than the rays that creep into the shadow zone of a smooth convex obstacle. These creeping rays decay exponentially, so that it is enough to remove the oscillation of the incident field to obtain a sufficiently simple field to approximate by piecewise polynomials, though a wave number-dependent, carefully graded mesh (cf. [12, 28]) must be used to resolve the transition zone between illuminated and shadow regions.

This approach, of removing the oscillation of the incident field and then approximating by a piecewise polynomial, does not suffice for a scatterer with corners. In brief, our algorithm for the convex polygon is as follows, inspired by our previously developed algorithm for scattering by a piecewise constant impedance plane [19], discussed in the last paragraph of section 1.1. From the geometrical theory of diffraction, one expects, on the sides of the polygon, incident, reflected, and diffracted ray contributions. On each illuminated side, the leading order behavior as  $k \rightarrow \infty$  consists of the incident wave and a known reflected wave. The first stage in our algorithm is to separate this part of the solution explicitly. (On sides in shadow this step is omitted.)

The remaining field on the boundary consists of waves which have been diffracted at the corners and which travel along the polygon sides. We approximate this remaining field by taking linear combinations of products of piecewise polynomials with plane waves, the plane waves travelling parallel to the polygon sides. A key ingredient in our algorithm is to design a graded mesh to go on each side of the polygon for the piecewise polynomial approximation. This mesh has larger elements away from the corners and a mesh grading near the corners depending on the internal angles, in such a way as to equidistribute the approximation error over the subintervals of the mesh, based on a careful study of the oscillatory behavior of the solution.

The major results of the paper are as follows. We begin in section 2 by introducing the exterior Dirichlet scattering problem that we will solve numerically via a second kind boundary integral equation formulation. Our boundary integral equation is well known (e.g., [23]), obtained from Green's representation theorem. The boundary integral operator is a linear combination of a single-layer potential and its normal derivative, so that the integral equation is precisely the adjoint of the equation proposed independently for the exterior Dirichlet problem by Brakhage and Werner [11], Leis [46], and Panič [52]. However, it seems (see, e.g., the introduction to [14]) not to be widely appreciated that these formulations are well-posed for Lipschitz as well as smooth domains in a range of boundary Sobolev spaces; indeed there exists only a brief and partial account of these standard formulations for the Lipschitz domain case in the literature [50] (the treatment in [23] is for domains of class  $C^2$ ). We remedy this gap in the literature in section 2, showing that our operator is a bijection on the boundary Sobolev space  $H^{s-1/2}(\Gamma)$  and the adjoint operator of [11] is a bijection on  $H^{s+1/2}(\Gamma)$ , both for  $|s| \leq 1/2$ . Our starting points are known results on the (Laplace) double-layer potential operator on Lipschitz domains [57, 30] coupled with mapping properties of the single-layer potential operator [49]. (We note that this obvious approach of deducing results for the Helmholtz equation as a perturbation from the Laplace case has previously been employed for second kind boundary integral equations in Lipschitz domains in [56, 50, 48].) Of course the results we obtain apply in particular to a polygonal domain in two dimensions.

The design of our numerical algorithm depends on a careful analysis of the oscillatory behavior of the solution of the integral equation (which is the normal derivative of the total field on the boundary  $\Gamma$ ). This is the content of section 3 of the paper. In contrast, e.g., to [28], where this information is obtained by difficult high frequency asymptotics, we adapt a technique from [19, 45], where explicit representations of the solution in a half-plane are obtained from Green's representation theorem. In the estimates we obtain of high order derivatives, we take care to obtain as precise information as possible, with a view to the future design of alternative numerical schemes, perhaps based on a  $p$ - or  $hp$ -boundary element method.

Section 4 of the paper contains, arguably, the most significant theoretical and practical results. In this section we design an approximation space for the normal derivative of the total field on  $\Gamma$ . As outlined above, on each side we approximate this unknown as the sum of the leading order asymptotics (known explicitly, and zero on a side in shadow) plus an expression of the form  $\exp(iks)V_+(s) + \exp(-iks)V_-(s)$ , where  $s$  is arc-length distance along the side and  $V_{\pm}(s)$  are piecewise polynomials. We show, as a main result of the paper, that the approximation space based on this representation has the property that the error in best approximation of the normal derivative of the total field is bounded by  $C_{\nu}(n[1 + \log(kL)])^{\nu+3/2}M_N^{-\nu-1}$ , where  $M_N$  is the total number of degrees of freedom,  $L$  is the length of the perimeter,  $n$  is the number of sides of the polygon,  $\nu$  is the polynomial degree, and the constant  $C_{\nu}$

depends only on  $\nu$  and the corner angles of the polygon. This is a strong result, showing that the number of degrees of freedom need only increase like  $\log^{3/2}(kL)$  as  $kL \rightarrow \infty$  to maintain accuracy.

In section 5 we analyze a Galerkin method, based on the approximation space of section 4. We show that the same bound holds for our Galerkin method approximation to the solution of the integral equation, except that an additional stability constant is introduced. We do not attempt the (difficult) task of ascertaining the dependence of this stability constant on  $k$ . In section 6 we present some numerical results which fully support our theoretical estimates, and we discuss, briefly, some numerical implementation issues, including conditioning and evaluation of the integrals, that arise. We finish the paper with some concluding remarks and open problems.

We note that the Galerkin method is, of course, not the only way to select a numerical solution from a given approximation space. In [6] we present some results for a collocation method, based on the approximation space results in section 4. The attraction of the Galerkin method we present in section 5 is that we are able to establish stability, at least in the asymptotic limit of sufficient mesh refinement, which we do not know how to do for the collocation method.

## 2. The boundary value problem and integral equation formulation.

Consider scattering of a time-harmonic acoustic plane wave  $u^i$  by a sound-soft convex polygon  $\Upsilon$ , with boundary  $\Gamma := \bigcup_{j=1}^n \Gamma_j$ , where  $\Gamma_j$ ,  $j = 1, \dots, n$ , are the  $n$  sides of the polygon with  $j$  increasing counterclockwise, as shown in Figure 2.1. We denote by  $P_j := (p_j, q_j)$ ,  $j = 1, \dots, n$ , the vertices of the polygon, and we set  $P_{n+1} = P_1$  so that, for  $j = 1, \dots, n$ ,  $\Gamma_j$  is the line joining  $P_j$  with  $P_{j+1}$ . We denote the length of  $\Gamma_j$  by  $L_j := |P_{j+1} - P_j|$ , the external angle at each vertex  $P_j$  by  $\Omega_j \in (\pi, 2\pi)$ , the unit normal perpendicular to  $\Gamma_j$  and pointing out of  $\Upsilon$  by  $\mathbf{n}_j := (n_{j1}, n_{j2})$ , and the angle of incidence of the plane wave, as measured counterclockwise from the downward vertical, by  $\theta \in [0, 2\pi)$ . Writing  $\mathbf{x} = (x_1, x_2)$  and  $\mathbf{d} := (\sin \theta, -\cos \theta)$ , we then have

$$u^i(\mathbf{x}) = e^{ik(x_1 \sin \theta - x_2 \cos \theta)} = e^{ik\mathbf{x} \cdot \mathbf{d}}.$$

We will say that  $\Gamma_j$  is in shadow if  $\mathbf{n}_j \cdot \mathbf{d} \geq 0$  and is illuminated if  $\mathbf{n}_j \cdot \mathbf{d} < 0$ . If  $n_s$  is the number of sides in shadow and it is convenient to choose the numbering so that sides  $1, \dots, n_s$  are in shadow and sides  $n_s + 1, \dots, n$  are illuminated.

We will formulate the boundary value problem we wish to solve for the total acoustic field  $u$  in a standard Sobolev space setting. For an open set  $G \subset \mathbb{R}^N$ , let  $H^1(G) := \{v \in L^2(G) : \nabla v \in L^2(G)\}$  ( $\nabla v$  denoting here the weak gradient of  $v$ ). We recall [49] that if  $G$  is a Lipschitz domain, then there is a well-defined trace operator, the unique bounded linear operator  $\gamma : H^1(G) \rightarrow H^{1/2}(\partial G)$  which satisfies  $\gamma v = v|_{\partial G}$  in the case when  $v \in C^\infty(\bar{G}) := \{w|_{\bar{G}} : w \in C^\infty(\mathbb{R}^N)\}$ . Let  $H^1(G; \Delta) := \{v \in H^1(G) : \Delta v \in L^2(G)\}$  ( $\Delta$  the Laplacian in a weak sense), a Hilbert space with the norm  $\|v\|_{H^1(G; \Delta)} := \{\int_G [|v|^2 + |\nabla v|^2 + |\Delta v|^2] dx\}^{1/2}$ . If  $G$  is Lipschitz, then [49] there is also a well-defined normal derivative operator, the unique bounded linear operator  $\partial_{\mathbf{n}} : H^1(G; \Delta) \rightarrow H^{-1/2}(\partial G)$  which satisfies

$$\partial_{\mathbf{n}} v = \frac{\partial v}{\partial \mathbf{n}} := \mathbf{n} \cdot \nabla v,$$

almost everywhere on  $\Gamma$ , when  $v \in C^\infty(\bar{G})$ .  $H_{\text{loc}}^1(G)$  denotes the set of measurable  $v : G \rightarrow \mathbb{C}$  for which  $\chi v \in H^1(G)$  for every compactly supported  $\chi \in C^\infty(\bar{G})$ .

The polygonal domain  $\Upsilon$  is Lipschitz as is its exterior  $D := \mathbb{R}^2 \setminus \Upsilon$ . Let  $\gamma_+ : H^1(D) \rightarrow H^{1/2}(\Gamma)$  and  $\gamma_- : H^1(\Upsilon) \rightarrow H^{1/2}(\Gamma)$  denote the exterior and interior trace



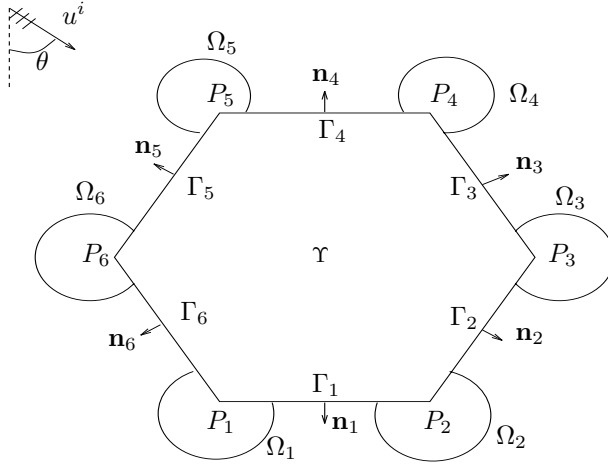


FIG. 2.1. Our notation for the polygon.

operators, respectively, and let  $\partial_{\mathbf{n}}^+ : H^1(D; \Delta) \rightarrow H^{-1/2}(\Gamma)$  and  $\partial_{\mathbf{n}}^- : H^1(\Upsilon; \Delta) \rightarrow H^{-1/2}(\Gamma)$  denote the exterior and interior normal derivative operators, respectively, the unit normal vector  $\mathbf{n}$  directed out of  $\Upsilon$ . Then the boundary value problem we seek to solve is the following: given  $k > 0$  (the wave number), find  $u \in C^2(D) \cap H_{\text{loc}}^1(D)$  such that

$$(2.1) \quad \Delta u + k^2 u = 0 \quad \text{in } D,$$

$$(2.2) \quad \gamma_+ u = 0 \quad \text{on } \Gamma,$$

and the scattered field,  $u^s := u - u^i$ , satisfies the Sommerfeld radiation condition

$$(2.3) \quad \lim_{r \rightarrow \infty} r^{1/2} \left( \frac{\partial u^s}{\partial r}(\mathbf{x}) - i k u^s(\mathbf{x}) \right) = 0,$$

where  $r = |\mathbf{x}|$  and the limit holds uniformly in all directions  $\mathbf{x}/|\mathbf{x}|$ .

**THEOREM 2.1** (see, e.g., [49, Theorem 9.11]). *The boundary value problem (2.1)–(2.3) has exactly one solution.*

**Remark 2.2.** While for compatibility with most of the boundary element literature we formulate the above boundary value problem in a standard Sobolev space setting, where one looks for a solution in the energy space  $H_{\text{loc}}^1(D)$ , we note that other alternatives are available. In particular, we might seek the solution in classical function spaces as  $u \in C^2(D) \cap C(\overline{D})$ ; this is commonly done when the boundary is sufficiently smooth [23, 24], but is also reasonable when  $D$  is Lipschitz, as it follows from standard elliptic regularity estimates up to the boundary (e.g., [42]) that if  $D$  is Lipschitz, then every solution to the Sobolev space formulation is continuous up to the boundary. A weaker requirement than  $u \in C^2(D) \cap C(\overline{D})$  is usual in the harmonic analysis literature, namely to seek  $u \in C^2(D)$  which satisfies the boundary condition (2.2) in the sense of almost everywhere tangential convergence, and to require that the nontangential maximal function of  $u$  is in  $L^p(\Gamma)$  for some  $p \in (1, \infty)$  (most commonly  $p = 2$ ). For details of this latter formulation for the sound-soft scattering problem for the Helmholtz equation, and proofs of its well-posedness (for  $2 - \epsilon < p < \infty$  and some  $\epsilon > 0$ ) via second kind integral equation formulations, see Torres and Welland [56] for the case  $\text{Im } k > 0$ , and Liu [48] and Mitrea [50] for the case  $k > 0$ .

Suppose that  $u \in C^2(D) \cap H_{\text{loc}}^1(D)$  satisfies (2.1)–(2.3). Then, by standard elliptic regularity estimates [35, section 8.11],  $u \in C^\infty(\bar{D} \setminus \Gamma_C)$ , where  $\Gamma_C := \{P_1, \dots, P_n\}$  is the set of corners of  $\Gamma$ . It is, moreover, possible to derive an explicit representation for  $u$  near the corners. For  $j = 1, \dots, n$ , let  $R_j := \min(L_{j-1}, L_j)$  (with  $L_{-1} := L_N$ ). Let  $(r, \theta)$  be polar coordinates local to a corner  $P_j$ , chosen so that  $r = 0$  corresponds to the point  $P_j$ , the side  $\Gamma_{j-1}$  lies on the line  $\theta = 0$ , the side  $\Gamma_j$  lies on the line  $\theta = \Omega_j$ , and the part of  $\bar{D}$  within distance  $R_j$  of  $P_j$  is the set of points with polar coordinates  $\{(r, \theta) : 0 \leq r < R_j, 0 \leq \theta \leq \Omega_j\}$ . Choose  $R$  so that  $R \leq R_j$  and  $\rho := kR < \pi/2$ , and let  $G$  denote the set of points with polar coordinates  $\{(r, \theta) : 0 \leq r < R, 0 \leq \theta \leq \Omega_j\}$  (see Figure 2.2). The following result, in which  $J_\nu$  denotes the Bessel function of the first kind of order  $\nu$ , follows by standard separation of variables arguments.

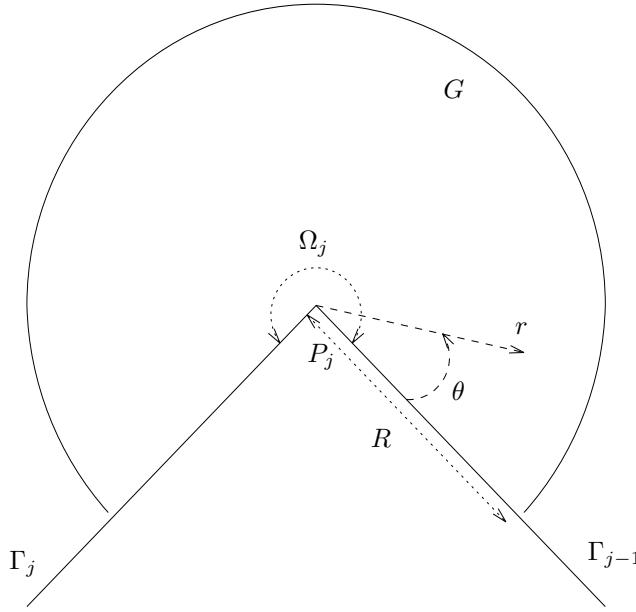


FIG. 2.2. Neighborhood of a corner.

**THEOREM 2.3** (representation near corners). *Let  $g(\theta)$  denote the value of  $u$  at the point with polar coordinates  $(R, \theta)$ . Then, where  $(r, \theta)$  denotes the polar coordinates of  $\mathbf{x}$ , it holds that*

$$(2.4) \quad u(\mathbf{x}) = \sum_{n=1}^{\infty} a_n J_{n\pi/\Omega_j}(kr) \sin\left(\frac{n\theta\pi}{\Omega_j}\right), \quad \mathbf{x} \in G,$$

where

$$(2.5) \quad a_n := \frac{2}{\Omega_j J_{n\pi/\Omega_j}(kR)} \int_0^{\Omega_j} g(\theta) \sin\left(\frac{n\theta\pi}{\Omega_j}\right) d\theta, \quad n \in \mathbb{N}.$$

**Remark 2.4.** The condition  $\rho = kR < \pi/2$  ensures that  $J_{n\pi/\Omega_j}(kR) \neq 0$ ,  $n \in \mathbb{N}$ , in fact (see (3.14)), that  $|a_n J_{n\pi/\Omega_j}(kr)| \leq C(r/R)^{n\pi/\Omega_j}$ , where the constant  $C$  is independent of  $n$  and  $\mathbf{x}$ , so that the series (2.4) converges absolutely and uniformly in  $G$ . Thus  $u \in C(\bar{D})$ . Moreover, from this representation and the behavior of the

Bessel function  $J_\nu$  (cf. Theorem 3.3) it follows that near the corner  $P_j$ ,  $\nabla u(\mathbf{x})$  has the standard singular behavior that

$$(2.6) \quad |\nabla u(\mathbf{x})| = \mathcal{O}\left(r^{\pi/\Omega_j-1}\right) \text{ as } r \rightarrow 0.$$

From [24, Theorem 3.12] and [49, Theorems 7.15 and 9.6] we see that if  $u$  satisfies the boundary value problem (2.1)–(2.3), then a form of Green's representation theorem holds, namely

$$(2.7) \quad u(\mathbf{x}) = u^i(\mathbf{x}) - \int_{\Gamma} \Phi(\mathbf{x}, \mathbf{y}) \partial_{\mathbf{n}}^+ u(\mathbf{y}) \, ds(\mathbf{y}), \quad \mathbf{x} \in D,$$

where  $\mathbf{n}$  is the normal direction directed out of  $\Upsilon$  and  $\Phi(\mathbf{x}, \mathbf{y}) := (i/4)H_0^{(1)}(k|\mathbf{x}-\mathbf{y}|)$  is the standard fundamental solution for the Helmholtz equation, with  $H_0^{(1)}$  the Hankel function of the first kind of order zero. Note that, since  $u \in C^\infty(\bar{D} \setminus \Gamma_C)$  and the bound (2.6) holds, we have in fact that  $\partial_{\mathbf{n}}^+ u = \partial u / \partial \mathbf{n} \in L^2(\Gamma) \cap C^\infty(\Gamma \setminus \Gamma_C)$ .

Starting from the representation (2.7) for  $u$ , we will obtain the boundary integral equation for  $\partial u / \partial \mathbf{n}$  which we will solve numerically later in the paper. This integral equation formulation is expressed in terms of the standard single-layer potential operator ( $\mathcal{S}$ ) and the adjoint of the double-layer potential operator ( $\mathcal{T}$ ), defined, for  $v \in L^2(\Gamma)$ , by

$$(2.8) \quad \mathcal{S}v(\mathbf{x}) := 2 \int_{\Gamma} \Phi(\mathbf{x}, \mathbf{y}) v(\mathbf{y}) \, ds(\mathbf{y}), \quad \mathcal{T}v(\mathbf{x}) := 2 \int_{\Gamma} \frac{\partial \Phi(\mathbf{x}, \mathbf{y})}{\partial \mathbf{n}(\mathbf{x})} v(\mathbf{y}) \, ds(\mathbf{y}), \quad \mathbf{x} \in \Gamma \setminus \Gamma_C.$$

We note that both  $\mathcal{S}$  and  $\mathcal{T}$  are bounded operators on  $L^2(\Gamma)$ . In fact, more generally ([56, Lemma 6.1] or see [49]),  $\mathcal{S} : H^{s-1/2}(\Gamma) \rightarrow H^{s+1/2}(\Gamma)$  and  $\mathcal{T} : H^{s-1/2}(\Gamma) \rightarrow H^{s-1/2}(\Gamma)$  for  $|s| \leq 1/2$ , and these mappings are bounded. We state the integral equation we will solve in the next theorem. Our proof of this theorem is based on the proof in [23] for domains of class  $C^2$ , modified to use more recent results on layer potentials on Lipschitz domains.

**THEOREM 2.5.** *If  $u \in C^2(D) \cap H_{\text{loc}}^1(D)$  satisfies the boundary value problem (2.1)–(2.3), then, for every  $\eta \in \mathbb{R}$ ,  $\partial_{\mathbf{n}}^+ u = \frac{\partial u}{\partial \mathbf{n}} \in L^2(\Gamma)$  satisfies the integral equation*

$$(2.9) \quad (\mathcal{I} + \mathcal{K}) \partial_{\mathbf{n}}^+ u = f \quad \text{on } \Gamma,$$

where  $\mathcal{I}$  is the identity operator,  $\mathcal{K} := \mathcal{T} + i\eta\mathcal{S}$ , and

$$f(\mathbf{x}) := 2 \frac{\partial u^i}{\partial \mathbf{n}}(\mathbf{x}) + 2i\eta u^i(\mathbf{x}), \quad \mathbf{x} \in \Gamma \setminus \Gamma_C.$$

Conversely, if  $v \in H^{-1/2}(\Gamma)$  satisfies  $(\mathcal{I} + \mathcal{K})v = f$  for some  $\eta \in \mathbb{R} \setminus \{0\}$ , and  $u$  is defined in  $D$  by (2.7), with  $\partial_{\mathbf{n}}^+ u$  replaced by  $v$ , then  $u \in C^2(D) \cap H_{\text{loc}}^1(D)$  and satisfies the boundary value problem (2.1)–(2.3). Moreover,  $\partial_{\mathbf{n}}^+ u = v$ .

*Proof.* Suppose first that  $v \in H^{-1/2}(\Gamma)$  satisfies  $(\mathcal{I} + \mathcal{K})v = f$  and define  $u$  by  $u := u^i - Sv$ , where

$$Sv(\mathbf{x}) := \int_{\Gamma} \Phi(\mathbf{x}, \mathbf{y}) v(\mathbf{y}) \, ds(\mathbf{y}), \quad \mathbf{x} \in \mathbb{R}^2 \setminus \Gamma.$$

Then [49, Chapter 9, Theorem 6.11]  $u \in C^2(\mathbb{R}^2 \setminus \Gamma) \cap H_{\text{loc}}^1(\mathbb{R}^2)$  and satisfies (2.1) in  $\mathbb{R}^2 \setminus \Gamma$  and (2.3). Thus  $u$  satisfies the boundary value problem as long as  $\gamma_+ u = 0$ .

Now standard results on boundary traces of the single-layer potential on Lipschitz domains [49] give us that

$$(2.10) \quad 2\gamma_{\pm}Sv = \mathcal{S}v, \quad 2\partial_{\mathbf{n}}^{\pm}(Sv) = (\mp\mathcal{I} + \mathcal{T})v.$$

On the other hand, we have that  $(\mathcal{I} + \mathcal{T} + i\eta\mathcal{S})v = f$ . Thus

$$2\partial_{\mathbf{n}}^{-}u = 2\frac{\partial u^i}{\partial \mathbf{n}} - (\mathcal{I} + \mathcal{T})v = i\eta\mathcal{S}v - 2i\eta\gamma_{+}u^i = -2i\eta\gamma_{-}u.$$

Applying Green's first identity [49, Theorem 4.4] to  $u \in H^1(\Upsilon; \Delta)$ , we deduce that

$$-\eta \int_{\Gamma} |\gamma_{-}u|^2 ds = \operatorname{Im} \int_{\Gamma} \partial_{\mathbf{n}}^{-}u \gamma_{-}\bar{u} ds = 0.$$

Thus  $\gamma_{+}u = \gamma_{-}u = 0$ , so that  $u$  satisfies the boundary value problem (2.1)–(2.3). Further,  $\partial_{\mathbf{n}}^{-}u = 0$  and  $\partial_{\mathbf{n}}^{+}u = v + \partial_{\mathbf{n}}^{-}u = v$ .

Conversely, if  $u$  satisfies the boundary value problem, in which case  $\partial_{\mathbf{n}}^{+}u = \frac{\partial u}{\partial \mathbf{n}} \in L^2(\Gamma) \subset H^{-1/2}(\Gamma)$  and (2.7) holds, then, applying the trace results (2.10), we deduce

$$2\gamma_{+}u^i = \mathcal{S}\partial_{\mathbf{n}}^{+}u, \quad 2\frac{\partial u^i}{\partial \mathbf{n}} = (\mathcal{I} + \mathcal{T})\partial_{\mathbf{n}}^{+}u.$$

Hence (2.9) holds.  $\square$

The above theorem, together with Theorem 2.1, implies that the integral equation (2.9) has exactly one solution in  $H^{-1/2}(\Gamma)$ , provided that we choose  $\eta \neq 0$ .

*Remark 2.6.* The idea of taking a linear combination of first and second kind integral equations to obtain a uniquely solvable boundary integral equation equivalent to an exterior scattering problem for the Helmholtz equation dates back to Brakhage and Werner [11], Leis [46], and Panič [52] for the exterior Dirichlet problem and Burton and Miller [15] for the Neumann problem. In fact, the integral equation in [11, 46, 52] is precisely the adjoint of (2.9) (see the discussion and Corollary 2.8 and Remark 2.9 below). The above proof is based on that in [23]. But, while Colton and Kress [23] restrict attention to the case when  $\Gamma$  is sufficiently smooth (of class  $C^2$ ), the proof of Theorem 2.5 is valid for arbitrary Lipschitz  $\Gamma$ , and in an arbitrary number of dimensions. (Note, however, that, for general Lipschitz  $\Gamma$ ,  $\mathcal{T}v$ , for  $v \in H^{-1/2}(\Gamma)$ , must be understood as the sum of the normal derivatives of  $Sv$  on the two sides of  $\Gamma$  [49, Chapter 7]. This definition of  $\mathcal{T}v$  is equivalent to that in (2.8) when  $v \in L^2(\Gamma)$  [56, section 4],[50, section 7].)

The following theorem, which shows that the operator  $\mathcal{I} + \mathcal{K}$  is bijective on a range of Sobolev spaces, holds for a general Lipschitz boundary  $\Gamma$  (with  $\mathcal{T}$  defined as in Remark 2.6 in the general case) in any number of space dimensions  $\geq 2$ .

**THEOREM 2.7.** *Let  $\mathcal{A} := \mathcal{I} + \mathcal{K}$  and suppose that  $\eta \in \mathbb{R} \setminus \{0\}$ . Then, for  $|s| \leq 1/2$ , the bounded linear operator  $\mathcal{A} : H^{s-1/2}(\Gamma) \rightarrow H^{s-1/2}(\Gamma)$  is bijective with bounded inverse  $\mathcal{A}^{-1}$ .*

*Proof.* It is enough to show this result for  $s = \pm 1/2$ ; it then follows for all  $s$  by interpolation [49]. We note first that, since  $H^1(\Gamma)$  is compactly embedded in  $L^2(\Gamma)$  so that  $L^2(\Gamma)$  is compactly embedded in  $H^{-1}(\Gamma)$ , and since  $\mathcal{S}$  is a bounded operator from  $H^{-1}(\Gamma)$  to  $L^2(\Gamma)$ , it follows that  $\mathcal{S}$  is a compact operator on  $H^{-1}(\Gamma)$  and  $L^2(\Gamma)$ . Let  $\mathcal{T}_0$  denote the operator corresponding to  $\mathcal{T}$  in the case  $k = 0$ ; explicitly, in the case when  $\Gamma$  is a 2D polygon,  $\mathcal{T}_0v$ , for  $v \in L^2(\Gamma)$ , is defined by (2.8) with  $\Phi(\mathbf{x}, \mathbf{y})$  replaced by  $\Phi_0(\mathbf{x}, \mathbf{y}) := -(2\pi)^{-1} \log |\mathbf{x} - \mathbf{y}|$ . Then  $\mathcal{T}_0 - \mathcal{T}$  is a bounded operator

from  $H^{-1}(\Gamma)$  to  $L^2(\Gamma)$  and thus a compact operator on  $H^{-1}(\Gamma)$  and  $L^2(\Gamma)$ . (To see the boundedness of  $\mathcal{T}_0 - \mathcal{T}$  it is perhaps easiest to show that the adjoint operator,  $\mathcal{T}'_0 - \mathcal{T}'$ , is a bounded operator from  $L^2(\Gamma)$  to  $H^1(\Gamma)$ , which follows since  $D(\mathcal{T}'_0 - \mathcal{T}')$  is a bounded operator on  $L^2(\Gamma)$ . Here  $D$  is the surface gradient operator,  $\mathcal{T}'$  and  $\mathcal{T}'_0$  are standard double-layer potential operators [49, Theorem 6.17], in particular

$$\mathcal{T}'v(\mathbf{x}) := \int_{\Gamma} \frac{\partial \Phi(\mathbf{x}, \mathbf{y})}{\partial \mathbf{n}(\mathbf{y})} v(\mathbf{y}) \mathbf{d}s(\mathbf{y}), \quad \mathbf{x} \in \Gamma,$$

and the boundedness of the integral operator  $D(\mathcal{T}'_0 - \mathcal{T}')$  follows since its kernel is continuous or weakly singular.) Thus  $\mathcal{A}$ , as an operator on  $H^{s-1/2}(\Gamma)$ ,  $s = \pm 1/2$ , is a compact perturbation of  $\mathcal{I} + \mathcal{T}_0$ . But it is known that  $\mathcal{I} + \mathcal{T}'_0$  is Fredholm of index zero on  $H^{s+1/2}(\Gamma)$  for  $|s| \leq 1/2$  (see [57, 30]), from which it follows from [49, Theorem 6.17] that the adjoint operator  $\mathcal{I} + \mathcal{T}'_0$  is Fredholm of index zero on  $H^{s-1/2}(\Gamma)$  for  $|s| \leq 1/2$ . Thus  $\mathcal{A}$  is Fredholm of index zero on  $H^{s-1/2}(\Gamma)$ ,  $s = \pm 1/2$ . Since  $\mathcal{A}$  is Fredholm with the same index on  $H^{-1}(\Gamma)$  and  $L^2(\Gamma)$ , and  $L^2(\Gamma)$  is dense in  $H^{-1}(\Gamma)$ , it follows from a standard result on Fredholm operators (see, e.g., [54, section 1]) that the null-space of  $\mathcal{A}$ , as an operator on  $H^{-1}(\Gamma)$ , is a subset of  $L^2(\Gamma)$ . But it follows from Theorems 2.1 and 2.5 that  $\mathcal{A}v = 0$  has no nontrivial solution in  $H^{-1/2}(\Gamma) \supset L^2(\Gamma)$ . Thus  $\mathcal{A} : H^{s-1/2}(\Gamma) \rightarrow H^{s+1/2}(\Gamma)$  is invertible for  $s = \pm 1/2$ .  $\square$

We have observed in Remark 2.6 that an alternative integral equation formulation for the exterior Dirichlet problem was introduced in [11, 46, 52]. In this formulation one seeks a solution to the exterior Dirichlet problem in the form of a combined single- and double-layer potential with some unknown density  $\tilde{\phi}$  and arrives at the boundary integral equation  $\mathcal{A}'\tilde{\phi} = 2\gamma_+ u^i$ , where

$$\mathcal{A}' = \mathcal{I} + \mathcal{T}' + i\eta S$$

is the adjoint of  $\mathcal{A}$  in the sense that the duality relation holds that  $\langle A\phi, \psi \rangle_{\Gamma} = \langle \phi, A'\psi \rangle_{\Gamma}$  for  $\phi \in H^{-1/2}(\Gamma)$ ,  $\psi \in H^{1/2}(\Gamma)$ , where  $\langle \phi, \psi \rangle_{\Gamma} := \int_{\Gamma} \phi(y)\psi(y)\mathbf{d}s(y)$  [49, Theorems 6.15 and 6.17]. It is known that  $\mathcal{A}'$  maps  $H^{s+1/2}(\Gamma)$  to  $H^{s+1/2}(\Gamma)$  and that this mapping is bounded for  $|s| \leq 1/2$  [56, 49]. This, the duality relation, and Theorem 2.7 imply the invertibility of  $\mathcal{A}'$ . Precisely, we have the following result.

**COROLLARY 2.8.** *For  $|s| \leq 1/2$  and  $\eta \in \mathbb{R} \setminus \{0\}$ , the mapping  $\mathcal{A}' : H^{s+1/2}(\Gamma) \rightarrow H^{s+1/2}(\Gamma)$  is bijective with bounded inverse  $\mathcal{A}'^{-1}$ .*

*Remark 2.9.* We note that brief details of a proof that the related operator  $\tilde{\mathcal{A}}' := \mathcal{I} + \mathcal{T}' + i\eta S S_0^2$ , where  $S_0$  denotes  $S$  in the case  $k = 0$ , is invertible as an operator on  $L^2(\Gamma)$  if  $\eta \in \mathbb{R} \setminus \{0\}$  are given in Mitrea [50]. Moreover, the argument outlined in [50], which follows the same pattern that we have used to prove Theorem 2.7, namely to show that  $\tilde{\mathcal{A}}'$  is Fredholm of index zero by perturbation from the Laplace case, and then to establish uniqueness by mirroring the usual uniqueness argument for smooth domains [23] (though the details of this are omitted in [50]), could be applied equally to show that  $\mathcal{A}'$  is invertible on  $L^2(\Gamma)$  for  $\eta \in \mathbb{R} \setminus \{0\}$ . Then, arguing by duality in the same way in which we deduce Corollary 2.8, we could deduce that  $\mathcal{A}$  is invertible on  $L^2(\Gamma)$ . Thus the argument outlined in [50] offers an alternative route to that written out above for establishing that  $\mathcal{A}$  and  $\mathcal{A}'$  are invertible as operators on  $L^2(\Gamma)$  for  $\eta \in \mathbb{R} \setminus \{0\}$ .

We also note that for the case  $\eta = 0$  when  $\mathcal{A}' = \mathcal{I} + \mathcal{T}'$ , it is shown that  $\mathcal{A}'$  is invertible as an operator on  $L^2(\Gamma)$  if  $\text{Im}k > 0$  in [56]. This result is sharpened in [50], where it is shown that  $\mathcal{A}'$  is also invertible as an operator on  $L^2(\Gamma)$  if  $k > 0$  is not

an eigenvalue of an appropriately stated interior Neumann problem in  $\Upsilon$ . See [50] (and Liu [48]) for further discussion of the case when  $k > 0$  is an interior Neumann eigenvalue when  $\mathcal{A}'$  has a finite-dimensional kernel.

In the remainder of the paper we will focus on the properties of  $\mathcal{A}$  as an operator on  $L^2(\Gamma)$ . We remark that the result that  $\mathcal{I} + \mathcal{T}'_0$  is Fredholm of index zero on  $L^2(\Gamma)$  dates back to [58] in the case when  $\Gamma$  is a 2D polygon. Letting  $\|\cdot\|_2$  denote the norm on  $L^2(\Gamma)$ , the technique in [58] (or see [17]) is to show that  $\mathcal{T}'_0 = \mathcal{T}'_1 + \mathcal{T}'_2$ , where  $\|\mathcal{T}'_1\|_2 < 1$ . Since taking adjoints preserves norms and compactness, and since  $\mathcal{S}$  and  $\mathcal{T} - \mathcal{T}_0$  are compact operators on  $L^2(\Gamma)$ , it holds in the case of a 2D polygon that  $\mathcal{A} = \mathcal{I} + \mathcal{K} = \mathcal{I} + \mathcal{K}_1 + \mathcal{K}_2$ , where  $\|\mathcal{K}_1\|_2 < 1$  and  $\mathcal{K}_2$  is a compact operator on  $L^2(\Gamma)$ .

Throughout the remainder of the paper we suppose that  $\eta \in \mathbb{R}$  with  $\eta \neq 0$ , so that  $\mathcal{A}$  is invertible, and let

$$(2.11) \quad C_S := \|\mathcal{A}^{-1}\|_2 = \|(\mathcal{I} + \mathcal{K})^{-1}\|_2.$$

We note that the value of  $C_S$  depends on  $k$ ,  $\eta$ , and the geometry of  $\Gamma$ . But recently an upper bound has been obtained for  $C_S$  as a function of  $k$ ,  $\eta$ , and the geometry of  $\Gamma$  in the case when  $\Gamma$  is (in two dimensions or three dimensions) the boundary of a piecewise smooth, starlike Lipschitz domain [20, Theorem 4.3], by using Rellich-type identities. In particular, for the commonly recommended choice  $|\eta| = k$  (see, e.g., [28]), this bound implies for the convex polygon that

$$(2.12) \quad C_S \leq \frac{1}{2} (1 + 9\theta + 4\theta^2)$$

for  $kR_0 \geq 1$ . Here it is assumed that the coordinate system is chosen so that the origin lies inside  $\Gamma$ , and we define  $R_0 := \max_{x \in \Gamma} |x|$ ,  $\theta := R_0/\delta_-$ , and  $\delta_-$  to be the perpendicular distance from the origin to the nearest side of the polygon. For example, in the case of a square (for which we carry out computations in section 6, choosing  $\eta = k$ ), taking the origin at the center of the square gives  $\theta = \sqrt{2}$  and so  $C_S \leq \frac{9}{2}(1 + \sqrt{2}) < 11$  for  $kR_0 \geq 1$ .

**3. Regularity results.** In this section we aim to understand the behavior of  $\partial u / \partial \mathbf{n}$ , the normal derivative of the total field on  $\Gamma$ , which is the unknown function in the integral equation (2.9). Precisely, we will obtain bounds on the surface tangential derivatives of  $\partial u / \partial \mathbf{n}$  in which the dependence on the wave number is completely explicit. This will enable us in section 4 to design a family of approximation spaces well adapted to approximating  $\partial u / \partial \mathbf{n}$ .


To understand the behavior of  $\partial u / \partial \mathbf{n}$  near the corners  $P_j$ , our technique will be to use the explicit representation (2.4). To understand the behavior away from the corners, we will need another representation for  $\partial u / \partial \mathbf{n}$  which we now derive.

Our starting point is the observation that if  $U = \{\mathbf{x} = (x_1, x_2), x_1 \in \mathbb{R}, x_2 > 0\}$  is the upper half-plane and  $v \in C^2(U) \cap C(\bar{U})$  satisfies the Helmholtz equation in  $U$  and the Sommerfeld radiation condition, then [18, Theorem 3.1]

$$(3.1) \quad v(\mathbf{x}) = 2 \int_{\partial U} \frac{\partial \Phi(\mathbf{x}, \mathbf{y})}{\partial y_2} v(\mathbf{y}) \, ds(\mathbf{y}), \quad \mathbf{x} \in U.$$

The same formula holds [18] if  $v$  is a horizontally or upwards propagating plane wave, i.e., if  $v(\mathbf{x}) = e^{ik\mathbf{x} \cdot \mathbf{d}}$  with  $\mathbf{d} = (d_1, d_2)$ ,  $|\mathbf{d}| = 1$ , and  $d_2 \geq 0$ .

To make use of this observation, we make the following construction. Extend the line  $\Gamma_j$  to infinity in both directions; the resulting infinite line comprises  $\Gamma_j$  and the

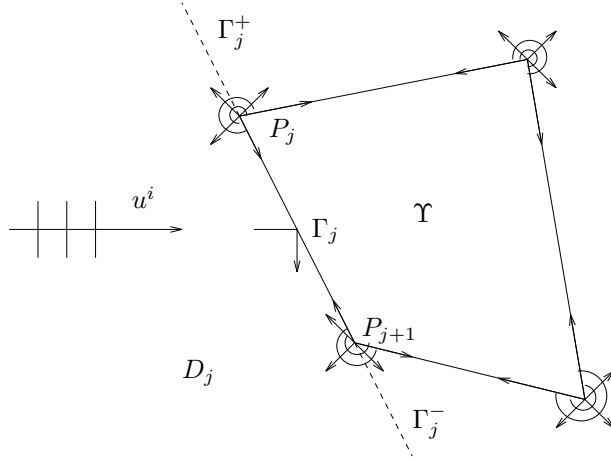FIG. 3.1. *Extension of  $\Gamma_j$ , for derivation of regularity estimates.*

half-lines  $\Gamma_j^+$  and  $\Gamma_j^-$ , above  $P_j$  and below  $P_{j+1}$ , respectively; see Figure 3.1. Let  $D_j \subset D$  denote the half-plane on the opposite side of this line to  $\Upsilon$ .

Now consider first the case when  $\Gamma_j$  is in shadow, by which we mean that  $\mathbf{n}_j \cdot \mathbf{d} \geq 0$ . Then it follows from (3.1) that

$$(3.2) \quad u^s(\mathbf{x}) = 2 \int_{\Gamma_j^+ \cup \Gamma_j \cup \Gamma_j^-} \frac{\partial \Phi(\mathbf{x}, \mathbf{y})}{\partial \mathbf{n}(\mathbf{y})} u^s(\mathbf{y}) \, ds(\mathbf{y}), \quad \mathbf{x} \in D_j,$$

and also that

$$(3.3) \quad u^i(\mathbf{x}) = 2 \int_{\Gamma_j^+ \cup \Gamma_j \cup \Gamma_j^-} \frac{\partial \Phi(\mathbf{x}, \mathbf{y})}{\partial \mathbf{n}(\mathbf{y})} u^i(\mathbf{y}) \, ds(\mathbf{y}), \quad \mathbf{x} \in D_j.$$

Since  $u = u^i + u^s$  and  $u = 0$  on  $\Gamma$ , we deduce that

$$u(\mathbf{x}) = 2 \int_{\Gamma_j^+ \cup \Gamma_j^-} \frac{\partial \Phi(\mathbf{x}, \mathbf{y})}{\partial \mathbf{n}(\mathbf{y})} u(\mathbf{y}) \, ds(\mathbf{y}), \quad \mathbf{x} \in D_j.$$

In the case when  $\Gamma_j$  is illuminated ( $\mathbf{n}_j \cdot \mathbf{d} < 0$ ), (3.2) holds, but (3.3) is replaced by

$$(3.4) \quad u^i(\mathbf{x}) = -2 \int_{\Gamma_j^+ \cup \Gamma_j \cup \Gamma_j^-} \frac{\partial \Phi(\mathbf{x}, \mathbf{y})}{\partial \mathbf{n}(\mathbf{y})} u^i(\mathbf{y}) \, ds(\mathbf{y}), \quad \mathbf{x} \in \mathbb{R}^2 \setminus \bar{D}_j.$$

Now let  $u^r(\mathbf{x}) := -u^i(\mathbf{x}')$  for  $\mathbf{x} \in D_j$ , where  $\mathbf{x}'$  is the reflection of  $\mathbf{x}$  in the line  $\Gamma_j^+ \cup \Gamma_j \cup \Gamma_j^-$ . (The physical interpretation of  $u^r$  is that it is the plane wave that would be reflected if  $\Gamma_j$  were infinitely long.) From (3.4), for  $\mathbf{x} \in D_j$ ,

$$u^r(\mathbf{x}) = 2 \int_{\Gamma_j^+ \cup \Gamma_j \cup \Gamma_j^-} \frac{\partial \Phi(\mathbf{x}', \mathbf{y})}{\partial \mathbf{n}(\mathbf{y})} u^i(\mathbf{y}) \, ds(\mathbf{y}) = -2 \int_{\Gamma_j^+ \cup \Gamma_j \cup \Gamma_j^-} \frac{\partial \Phi(\mathbf{x}, \mathbf{y})}{\partial \mathbf{n}(\mathbf{y})} u^i(\mathbf{y}) \, ds(\mathbf{y}),$$

and adding this to (3.2) we find that

$$u(\mathbf{x}) = u^i(\mathbf{x}) + u^r(\mathbf{x}) + 2 \int_{\Gamma_j^+ \cup \Gamma_j^-} \frac{\partial \Phi(\mathbf{x}, \mathbf{y})}{\partial \mathbf{n}(\mathbf{y})} u(\mathbf{y}) \, ds(\mathbf{y}), \quad \mathbf{x} \in D_j.$$

Thus on an illuminated side it holds that

$$(3.5) \quad \frac{\partial u}{\partial \mathbf{n}}(\mathbf{x}) = 2 \frac{\partial u^i}{\partial \mathbf{n}}(\mathbf{x}) + 2 \int_{\Gamma_j^+ \cup \Gamma_j^-} \frac{\partial^2 \Phi(\mathbf{x}, \mathbf{y})}{\partial \mathbf{n}(\mathbf{x}) \partial \mathbf{n}(\mathbf{y})} u(\mathbf{y}) \, ds(\mathbf{y}), \quad \mathbf{x} \in \Gamma_j.$$

The same expression, but without the term  $2 \frac{\partial u^i}{\partial \mathbf{n}}(\mathbf{x})$ , holds when  $\Gamma_j$  is in shadow. The high frequency Kirchhoff or physical optics approximation to  $\partial u / \partial \mathbf{n}$  is just  $\partial u / \partial \mathbf{n} = 2 \partial u^i / \partial \mathbf{n}$  on the illuminated sides and zero on the sides in shadow. Thus the integral in (3.5) is an explicit expression for the correction to the physical optics approximation.

The representation (3.5) is very useful in understanding the oscillatory nature of the solution on a typical side  $\Gamma_j$ . In particular we note that, in physical terms, the integral over  $\Gamma_j^+$  can be interpreted as the normal derivative on  $\Gamma_j$  of the field due to dipoles distributed along  $\Gamma_j^+$ . The point is that the field due to each dipole has the same oscillatory behavior  $e^{iks}$  on  $\Gamma_j$ . To exhibit this explicitly, we calculate, using standard properties of Bessel functions [2], that for  $\mathbf{x} \in \Gamma_j$ ,  $\mathbf{y} \in \Gamma_j^\pm$ , with  $\mathbf{x} \neq \mathbf{y}$ ,

$$(3.6) \quad \frac{\partial^2 \Phi(\mathbf{x}, \mathbf{y})}{\partial \mathbf{n}(\mathbf{x}) \partial \mathbf{n}(\mathbf{y})} = \frac{ik H_1^{(1)}(k|\mathbf{x} - \mathbf{y}|)}{4|\mathbf{x} - \mathbf{y}|} = \frac{ik^2}{4} e^{ik|\mathbf{x} - \mathbf{y}|} \mu(k|\mathbf{x} - \mathbf{y}|),$$

where  $\mu(z) := e^{-iz} H_1^{(1)}(z)/z$  for  $z > 0$ . The function  $\mu(z)$  is singular at  $z = 0$  but increasingly smooth as  $z \rightarrow \infty$ , as quantified in the next theorem (cf. [19, Lemma 2.5]).

**THEOREM 3.1.** *For every  $\epsilon > 0$ ,*

$$|\mu^{(m)}(z)| \leq C_\epsilon (m+1)! z^{-3/2-m}$$

for  $z \geq \epsilon$  and  $m = 0, 1, \dots$ , where

$$(3.7) \quad C_\epsilon = \frac{2\sqrt[4]{5}(1 + \epsilon^{-1/2})}{\pi}.$$

*Proof.* From [51, equation (12.31)],  $\mu(z) = (-2i/\pi) \int_0^\infty (t^2 - 2it)^{1/2} e^{-zt} \, dt$  for  $\operatorname{Re} z > 0$ , where the branch of  $(t^2 - 2it)^{1/2}$  is chosen so that  $\operatorname{Re}(t^2 - 2it)^{1/2} \geq 0$ . Thus

$$\mu^{(m)}(z) = (-1)^{m+1} \frac{2i}{\pi} \int_0^\infty t^{m+1/2} (t - 2i)^{1/2} e^{-zt} \, dt$$

and hence

$$|\mu^{(m)}(z)| \leq \frac{2}{\pi} \int_0^\infty t^{m+1/2} (t^2 + 4)^{1/4} e^{-zt} \, dt.$$

Now for  $t \in [0, 1]$ ,  $(t^2 + 4)^{1/4} \leq 5^{1/4}$  and for  $t \in [1, \infty)$ ,  $(t^2 + 4)^{1/4} \leq 5^{1/4} t^{1/2}$ . So

$$\begin{aligned} \frac{\pi}{2\sqrt[4]{5}} |\mu^{(m)}(z)| &\leq \int_0^\infty t^{m+1/2} e^{-zt} \, dt + \int_0^\infty t^{m+1} e^{-zt} \, dt \\ &= \Gamma(m+3/2) z^{-3/2-m} + \Gamma(m+2) z^{-2-m} \leq (1 + \epsilon^{-1/2}) \Gamma(m+2) z^{-3/2-m} \end{aligned}$$

for  $z \geq \epsilon$ .  $\square$

To make use of the above result, let  $\mathbf{x}(s)$  denote the point on  $\Gamma$  whose arc-length distance measured counterclockwise from  $P_1$  is  $s$ . Explicitly,

$$\mathbf{x}(s) = P_j + \left(s - \tilde{L}_{j-1}\right) \left(\frac{P_{j+1} - P_j}{L_j}\right) \quad \text{for } s \in [\tilde{L}_{j-1}, \tilde{L}_j], \quad j = 1, \dots, n,$$



where  $\tilde{L}_0 := 0$  and for  $j = 1, \dots, n$ ,  $\tilde{L}_j := \sum_{m=1}^j L_m$  is the arc-length distance from  $P_1$  to  $P_{j+1}$ . Define

$$(3.8) \quad \phi(s) := \frac{1}{k} \frac{\partial u}{\partial \mathbf{n}}(\mathbf{x}(s)) \quad \text{for } s \in [0, L],$$

where  $L := \tilde{L}_n$  so that  $\phi(s)$  is the unknown function of arc-length whose behavior we seek to determine. Let

$$\Psi(s) := \begin{cases} \frac{2}{k} \frac{\partial u^i}{\partial \mathbf{n}}(\mathbf{x}(s)) & \text{if } s \in (\tilde{L}_{n_s}, L), \\ 0 & \text{if } s \in (0, \tilde{L}_{n_s}), \end{cases}$$

so that  $\Psi(s)$  is the physical optics approximation to  $\phi(s)$ , and set  $\psi_j(s) := u(\tilde{\mathbf{x}}_j(s))$ ,  $s \in \mathbb{R}$ , where  $\tilde{\mathbf{x}}_j(s) \in \Gamma_j^+ \cup \Gamma_j \cup \Gamma_j^-$  is the point

$$\tilde{\mathbf{x}}_j(s) := P_j + \left(s - \tilde{L}_{j-1}\right) \left(\frac{P_{j+1} - P_j}{L_j}\right), \quad -\infty < s < \infty.$$

From (3.5) and (3.6) we have the explicit representation for  $\phi$  on the side  $\Gamma_j$  that

$$(3.9) \quad \phi(s) = \Psi(s) + \frac{i}{2} [e^{iks} v_j^+(s) + e^{-iks} v_j^-(s)], \quad s \in [\tilde{L}_{j-1}, \tilde{L}_j], \quad j = 1, \dots, n,$$

where

$$\begin{aligned} v_j^+(s) &:= k \int_{-\infty}^{\tilde{L}_{j-1}} \mu(k|s-t|) e^{-ikt} \psi_j(t) dt, \quad s \in [\tilde{L}_{j-1}, \tilde{L}_j], \quad j = 1, \dots, n, \\ v_j^-(s) &:= k \int_{\tilde{L}_j}^{\infty} \mu(k|s-t|) e^{ikt} \psi_j(t) dt, \quad s \in [\tilde{L}_{j-1}, \tilde{L}_j], \quad j = 1, \dots, n. \end{aligned}$$

The terms  $e^{iks} v_j^+(s)$  and  $e^{-iks} v_j^-(s)$  in (3.9) are the integrals over  $\Gamma_j^+$  and  $\Gamma_j^-$ , respectively, in (3.5) and can be thought of as the contributions to  $\partial u / \partial \mathbf{n}$  on  $\Gamma_j$  due to the diffracted rays travelling from  $P_j$  to  $P_{j+1}$  and from  $P_{j+1}$  to  $P_j$ , respectively, including all multiply diffracted ray components.

Thus the equation we wish to solve is (2.9), and we have the explicit representation (3.9) for its solution. At first glance this may not appear to help us, since the unknown solution  $u$  appears (as  $\psi_j$ ) on the right-hand side of (3.9). However, (3.9) is extremely helpful in understanding how  $\phi$  behaves since it explicitly separates out the oscillatory part of the solution. The functions  $v_j^\pm$  are not oscillatory away from the corners, as the following theorem quantifies. In this theorem and hereafter we let

$$(3.10) \quad u_M := \sup_{\mathbf{x} \in D} |u(\mathbf{x})| < \infty$$

and note that  $\|\psi_j\|_\infty \leq u_M$ ,  $j = 1, \dots, n$ .

**THEOREM 3.2** (solution behavior away from corners). *For  $\epsilon > 0$ ,  $j = 1, \dots, n$ , and  $m = 0, 1, \dots$ , it holds for  $s \in [\tilde{L}_{j-1}, \tilde{L}_j]$  that*

$$\begin{aligned} |v_j^{+(m)}(s)| &\leq 2C_\epsilon m! u_M k^m (k(s - \tilde{L}_{j-1}))^{-1/2-m}, \quad k(s - \tilde{L}_{j-1}) \geq \epsilon, \\ |v_j^{-(m)}(s)| &\leq 2C_\epsilon m! u_M k^m (k(\tilde{L}_j - s))^{-1/2-m}, \quad k(\tilde{L}_j - s) \geq \epsilon, \end{aligned}$$

where  $C_\epsilon$  is given by (3.7).

*Proof.* From Theorem 3.1, for  $s \in [\tilde{L}_{j-1} + \epsilon/k, \tilde{L}_j]$

$$\begin{aligned} |v_j^{+(m)}(s)| &= k^{m+1} \left| \int_{-\infty}^{\tilde{L}_{j-1}} \mu^{(m)}(k|s-t|) e^{-ikt} \psi_j(t) dt \right| \\ &\leq C_\epsilon (m+1)! k^{m+1} \|\psi_j\|_\infty \int_{-\infty}^{\tilde{L}_{j-1}} (k|s-t|)^{-3/2-m} dt \\ &= C_\epsilon \frac{(m+1)!}{(m+1/2)} k^{-1/2} \|\psi_j\|_\infty (s - \tilde{L}_{j-1})^{-1/2-m} \\ &\leq 2C_\epsilon m! u_M k^m (k(s - \tilde{L}_{j-1}))^{-1/2-m}. \end{aligned}$$

The bound on  $v_j^{-(m)}(s)$  is obtained similarly.  $\square$

The above theorem quantifies precisely the behavior of  $\partial u / \partial \mathbf{n}$  away from the corners. Complementing this bound, using Theorem 2.3 we can study the behavior of  $\partial u / \partial \mathbf{n}$  near the corners. To state this result it is convenient to extend the definition of  $\phi$  from  $[0, L]$  to  $\mathbb{R}$  by the periodicity condition  $\phi(s+L) = \phi(s)$ ,  $s \in \mathbb{R}$ .

**THEOREM 3.3** (solution behavior near corners). *If  $kR_j = \min(kL_{j-1}, kL_j) \geq \pi/4$  for  $j = 1, \dots, n$ , then for  $j = 1, \dots, n$  and  $0 < k|s - \tilde{L}_{j-1}| \leq \pi/12$ , it holds that*

$$|\phi^{(m)}(s)| \leq C u_M \sqrt{m + \frac{1}{2}} m! k^m (k|s - \tilde{L}_{j-1}|)^{-\alpha_j - m}, \quad m = 0, 1, \dots,$$

where

$$(3.11) \quad \alpha_j := 1 - \frac{\pi}{\Omega_j} \in (0, 1/2)$$

and  $C = 72\sqrt{2} \pi^{-1} e^{1/e + \pi/6}$ .

*Proof.* To analyze the behavior of  $u$  using (2.4) we will use the representation for the Bessel function of order  $\nu$  [2, equation (9.1.20)],

$$J_\nu(z) = \frac{2(z/2)^\nu}{\pi^{1/2} \Gamma(\nu + 1/2)} \int_0^1 (1-t^2)^{\nu-1/2} \cos(zt) dt \text{ for } \operatorname{Re} z > 0, \nu > -1/2,$$

where the branch of  $(z/2)^\nu$  is chosen so that  $(z/2)^\nu > 0$  for  $z > 0$  and  $(z/2)^\nu$  is analytic in  $\operatorname{Re} z > 0$ . This representation implies that

$$(3.12) \quad \cos z \leq \frac{J_\nu(z) \pi^{1/2} \Gamma(\nu + 1/2)}{2(z/2)^\nu \int_0^1 (1-t^2)^{\nu-1/2} dt} \leq 1, \quad 0 \leq z \leq \pi/2.$$

Recalling the definitions of  $R$  and  $G$  before Theorem 2.3 and the Definition (2.5) of the coefficient  $a_n$ , we have that  $\rho := kR < \pi/2$  and

$$(3.13) \quad |a_n| \leq \frac{2u_M}{J_{n\pi/\Omega_j}(\rho)}.$$

Thus, for  $0 < r < R$ ,

$$(3.14) \quad |a_n J_{n\pi/\Omega_j}(kr)| \leq \frac{2u_M}{\cos \rho} \left( \frac{r}{R} \right)^{n\pi/\Omega_j},$$

confirming that the series (2.4) converges for  $0 \leq r < R$ . Further, the bound (3.14) justifies differentiating (2.4) term by term to get that for  $\mathbf{x} \in \Gamma_{j-1} \cap G$ ,  $\frac{\partial u}{\partial \mathbf{n}}(\mathbf{x}) = kF(kr)$ , where

$$(3.15) \quad F(z) := \frac{\pi}{\Omega_j z} \sum_{n=1}^{\infty} n a_n J_{n\pi/\Omega_j}(z), \quad \operatorname{Re} z > 0, \quad |z| < \rho.$$

Since  $|\cos z| \leq e^{|\operatorname{Im} z|}$ ,  $z \in \mathbb{C}$ , so that  $|\cos zt| \leq e^{|\operatorname{Im} z|}$  for  $z \in \mathbb{C}$ ,  $0 \leq t \leq 1$ , we see from (3.13) that for  $\operatorname{Re} z > 0$ ,

$$(3.16) \quad |n a_n J_{n\pi/\Omega_j}(z)| \leq \frac{2u_M n}{\cos \rho} e^{|\operatorname{Im} z|} \left( \frac{|z|}{\rho} \right)^{n\pi/\Omega_j}.$$

Thus the series (3.15) is absolutely and uniformly convergent in  $\operatorname{Re} z > 0$ ,  $|z| < \rho_0$ , for every  $\rho_0 < \rho$ , and  $F$  is analytic in  $\operatorname{Re} z > 0$ ,  $|z| < \rho$ . Further, from (3.16) and since for  $0 \leq \alpha < 1$ ,  $\sum_{n=1}^{\infty} n \alpha^n = \alpha \frac{d}{d\alpha} \sum_{n=1}^{\infty} \alpha^n = \frac{\alpha}{(1-\alpha)^2}$ , we see that for  $\operatorname{Re} z > 0$ ,  $|z| < \rho$ ,

$$|F(z)| \leq \frac{\pi}{\Omega_j |z|} \frac{2u_M}{\cos \rho} \frac{e^{|\operatorname{Im} z|}}{(1 - |z/\rho|^{\pi/\Omega_j})^2} \left( \frac{|z|}{\rho} \right)^{\pi/\Omega_j}.$$

We can use this bound to obtain bounds on derivatives of  $F$ , and hence bounds on derivatives of  $\partial u / \partial \mathbf{n}$ . For  $0 < t \leq \rho/3$ ,  $0 < \varepsilon < t$ , from Cauchy's integral formula we have that

$$|F^{(m)}(t)| = \frac{m!}{2\pi} \left| \int_{\Gamma_\varepsilon} \frac{F(z)}{(z-t)^{m+1}} dz \right|,$$

where  $\Gamma_\varepsilon$  is the circle of radius  $\varepsilon$  centered on  $t$ , which lies in  $\operatorname{Re} z > 0$ ,  $|z| < \rho$ . Since

$$|F(z)| \leq \frac{2\pi u_M e^{|\operatorname{Im} z|} (t - \varepsilon)^{\pi/\Omega_j - 1}}{\Omega_j \rho^{\pi/\Omega_j} \cos \rho (1 - (2/3)^{\pi/\Omega_j})^2}$$

for  $z \in \Gamma_\varepsilon$ , we see that

$$(3.17) \quad |F^{(m)}(t)| \leq \frac{2\pi u_M e^t (t - \varepsilon)^{\pi/\Omega_j - 1} \varepsilon^{-m} m!}{\Omega_j \rho^{\pi/\Omega_j} \cos \rho (1 - (2/3)^{\pi/\Omega_j})^2}.$$

Now, for  $\alpha > 0$ ,  $\beta > 0$ ,  $(t - \varepsilon)^{-\alpha} \varepsilon^{-\beta}$  is minimized on  $(0, t)$  by the choice  $\varepsilon = \beta t / (\alpha + \beta)$ . Setting  $\varepsilon = mt / (m + 1 - \pi/\Omega_j)$  in (3.17), we see that

$$|F^{(m)}(t)| \leq \frac{2\pi u_M e^t m! (m + 1 - \pi/\Omega_j)^{m+1-\pi/\Omega_j} t^{\pi/\Omega_j-1-m}}{\Omega_j \rho^{\pi/\Omega_j} \cos \rho (1 - (2/3)^{\pi/\Omega_j})^2 m^m (1 - \pi/\Omega_j)^{1-\pi/\Omega_j}}.$$

Now

$$\begin{aligned} \frac{(m + 1 - \pi/\Omega_j)^{m+1-\pi/\Omega_j}}{m^m} &\leq \frac{(m + 1/2)^{m+1/2}}{m^m} = \left(1 + \frac{1}{2m}\right)^m \sqrt{m + \frac{1}{2}} \leq e^{1/2} \sqrt{m + \frac{1}{2}}, \\ \frac{2\pi}{\Omega_j (1 - \pi/\Omega_j)^{1-\pi/\Omega_j} (1 - (2/3)^{\pi/\Omega_j})^2} &\leq \frac{18}{(1 - \pi/\Omega_j)^{1-\pi/\Omega_j}} \leq 18e^{1/e}, \end{aligned}$$

and hence

$$(3.18) \quad |F^{(m)}(t)| \leq \frac{18e^{1/e+1/2+t} \sqrt{m + 1/2} m! u_M}{\rho^{\pi/\Omega_j} \cos \rho} t^{\pi/\Omega_j-1-m}, \quad 0 < t \leq \rho/3.$$

Since  $\frac{\partial u}{\partial \mathbf{n}}(\mathbf{x}) = kF(kr)$ , this implies that

$$\left| \frac{\partial^{(m)}}{\partial r^m} \left[ \frac{\partial u}{\partial \mathbf{n}}(\mathbf{x}) \right] \right| \leq \tilde{C} u_M k^{m+1} (kr)^{\pi/\Omega_j - 1 - m}, \quad 0 < r \leq R/3 < \frac{\pi}{6k},$$

where  $\tilde{C} = (18e^{1/e+1/2+\pi/6} \sqrt{m+1/2} m!)/(\rho^{\pi/\Omega_j} \cos \rho)$ . Choosing  $\rho = \pi/4$ , the result follows.  $\square$

From Theorems 3.2 and 3.3, and (3.9), which gives that

$$v_j^\pm(s) = -2ie^{\mp iks}(\phi(s) - \Psi(s)) - e^{\pm 2iks} v_j^\mp(s),$$

we deduce the following corollary, in which  $\alpha_{n+1} := \alpha_1$ .

**COROLLARY 3.4.** *Suppose that  $kR_j = \min(kL_{j-1}, kL_j) \geq \pi/4$  for  $j = 1, \dots, n$ . Then, for  $m = 0, 1, \dots$ , there exists  $C_m > 0$ , dependent only on  $m$ , such that if  $j \in \{1, \dots, n\}$ , then*

$$\begin{aligned} |v_j^{+(m)}(s)| &\leq C_m u_M k^m (k(s - \tilde{L}_{j-1}))^{-\alpha_j - m}, \quad 0 < k(s - \tilde{L}_{j-1}) \leq \pi/12, \\ |v_j^{-(m)}(s)| &\leq C_m u_M k^m (k(\tilde{L}_j - s))^{-\alpha_{j+1} - m}, \quad 0 < k(\tilde{L}_j - s) \leq \pi/12. \end{aligned}$$

The following limiting case suggests that the bounds in Theorem 3.2 and Corollary 3.4 are optimal in their dependence on  $k$ ,  $s - \tilde{L}_{j-1}$ , and  $\tilde{L}_j - s$ , in the sense that no sharper bound holds uniformly in the angle of incidence. Suppose that  $\Upsilon$  lies in the right-hand half-plane with  $P_1$  located at the origin and  $\mathbf{d} \cdot \mathbf{n}_1 = 0$ , and consider the limit  $\min(kL_0, kL_1) \rightarrow \infty$  and  $\Omega_1 \rightarrow 2\pi$ . In this limit  $\alpha_1 \rightarrow 1/2$ , and it is plausible that  $u(\mathbf{x}) \rightarrow u_{\text{k.e.}}(\mathbf{x})$ , where  $u_{\text{k.e.}}$  is the solution to the following “knife edge” diffraction problem: where  $\Gamma_{\text{k.e.}} := \{(x_1, 0) : x_1 \geq 0\}$ , given the incident plane wave  $u^i$ , find the total field  $u_{\text{k.e.}} \in C^2(\mathbb{R}^2 \setminus \Gamma_{\text{k.e.}}) \cap C(\mathbb{R}^2)$  such that  $\Delta u_{\text{k.e.}} + k^2 u_{\text{k.e.}} = 0$  in  $\mathbb{R}^2 \setminus \Gamma_{\text{k.e.}}$ ,  $u_{\text{k.e.}} = 0$  on  $\Gamma_{\text{k.e.}}$ , and  $u_{\text{k.e.}} - u^i$  has the correct radiating behavior. The solution to this problem which satisfies the physically correct radiation condition is given by [10, equation (8.24)]. This solution implies that  $\varphi(s) := \frac{1}{k} \frac{\partial u_{\text{k.e.}}}{\partial \mathbf{n}}((s, 0)) = \pm e^{iks} v(s)$ , where the  $+/-$  sign is taken on the upper/lower surface of the knife edge and  $v(s) := \hat{c}(ks)^{-1/2}$ , where  $\hat{c} = e^{-i\pi/4} \sqrt{2/\pi}$ . The function  $v(s)$  and its derivatives satisfy the bounds on  $v_1^\pm$  in Theorem 3.2 and Corollary 3.4 (with  $\alpha_j = 1/2$ ), but do not satisfy any sharper bounds in terms of dependence on  $k$  or  $s - \tilde{L}_{j-1}$ .

**4. The approximation space.** Our aim now is to use the regularity results of section 3 to design an optimal approximation space for the numerical solution of (2.9). We begin by rewriting (2.9) in parametric form. Defining, for  $j = 1, \dots, n$ ,

$$a_j := \frac{p_{j+1} - p_j}{L_j}, \quad b_j := \frac{q_{j+1} - q_j}{L_j}, \quad c_j := p_j - a_j \tilde{L}_{j-1}, \quad d_j := q_j - b_j \tilde{L}_{j-1},$$

and noting that  $n_{j1} = b_j$ ,  $n_{j2} = -a_j$ , we can rewrite (2.9) as

$$(4.1) \quad \phi(s) + \int_0^L \kappa(s, t) \phi(t) dt = f(s), \quad s \in [0, L],$$

where, for  $\mathbf{x}(s) \in \Gamma_l$ ,  $\mathbf{y}(t) \in \Gamma_j$ , i.e., for  $s \in (\tilde{L}_{l-1}, \tilde{L}_l)$ ,  $t \in (\tilde{L}_{j-1}, \tilde{L}_j)$ ,

$$\kappa(s, t) := -\frac{1}{2} \left[ \eta H_0^{(1)}(kR) + ik[(a_l b_j - b_l a_j)t + b_l(c_l - c_j) - a_l(d_l - d_j)] \frac{H_1^{(1)}(kR)}{R} \right],$$

with  $R = R(s, t) := \sqrt{(a_l s - a_j t + c_l - c_j)^2 + (b_l s - b_j t + d_l - d_j)^2}$  and  $f \in L^2(0, L)$  defined by

$$f(s) := 2i[b_l \sin \theta + a_l \cos \theta + (\eta/k)]e^{ik((a_l s + c_l) \sin \theta - (b_l s + d_l) \cos \theta)}.$$

The first step in our numerical method is to separate off the explicitly known leading order behavior, the physical optics approximation  $\Psi(s)$ . Thus we introduce a new unknown,

$$(4.2) \quad \varphi := \phi - \Psi \in L^2(0, L).$$

Substituting into (4.1) we have

$$(4.3) \quad \varphi + K\varphi = F,$$

where the integral operator  $K : L^2(0, L) \rightarrow L^2(0, L)$  and  $F \in L^2(0, L)$  are defined by

$$K\psi(s) := \int_0^L \kappa(s, t)\psi(t) dt, \quad 0 \leq s \leq L, \quad F := f - \Psi - K\Psi.$$

Equation (4.3) is the integral equation we will solve numerically. By Theorem 2.7, (4.3) has a unique solution in  $L^2(0, L)$  and  $\|(I + K)^{-1}\|_2 = C_S$ , where  $C_S$  is defined in (2.11) and  $I$  is the identity operator on  $L^2(0, L)$ .

We will design an approximation space to represent  $\varphi$  based on (3.9). The novelty of the scheme we propose is that on each side  $\Gamma_j$ ,  $j = 1, \dots, n$ , of the polygon, we approximate  $v_j^\pm$  by conventional piecewise polynomials, rather than approximating  $\varphi$  itself. This makes sense since, as quantified by Theorem 3.2, the functions  $v_j^\pm$  are smooth (their higher order derivatives are small) away from the corners  $P_j$  and  $P_{j+1}$ . To approximate  $v_j^\pm$  we use piecewise polynomials of a fixed degree  $\nu \geq 0$  on a graded mesh, the mesh grading adapted in an optimal way to the bounds of Theorems 3.2 and 3.3. In [19] the 2D problem of scattering of a plane wave by a straight boundary of piecewise constant surface impedance was considered. We will construct a similar mesh on each side of the polygon as was used on each interval of constant impedance in [19], except that we use a different grading near the corners, with the grading near each corner dependent on the angle at that corner.

To construct this mesh we choose a constant  $c^* > 0$  (we take  $c^* = 2\pi$  in the numerical examples in section 6) and set  $\lambda^* := c^*/k$ . Next, for every  $A > \lambda^*$ , we define a composite graded mesh on  $[0, A]$ , with a polynomial grading on  $[0, \lambda^*]$  and a geometric grading on  $[\lambda^*, A]$  (note that the mesh on  $[0, \lambda^*]$  is similar to that classically used near corners (e.g., [17, 7]) for solving Laplace's equation on polygonal domains).

**DEFINITION 4.1.** *For  $A > \lambda^*$ ,  $N = 2, 3, \dots$ ,  $\Lambda_{N,A,q} := \{y_0, \dots, y_{N+N_{A,q}}\}$  is the mesh consisting of the points*

$$(4.4) \quad y_i = \lambda^* \left( \frac{i}{N} \right)^q, \quad i = 0, \dots, N, \quad \text{and} \quad y_{N+j} := \lambda^* \left( \frac{A}{\lambda^*} \right)^{j/N_{A,q}}, \quad j = 1, \dots, N_{A,q},$$

where  $N_{A,q} := \lceil N^* \rceil$ , i.e.,  $N_{A,q}$  is the smallest integer greater than or equal to  $N^*$ , and

$$N^* := \frac{-\log(A/\lambda^*)}{q \log(1 - 1/N)}.$$

Let us explain the rationale behind this definition. Having the bounds of Theorems 3.2 and 3.3 in mind, the mesh on  $[0, \lambda^*]$  is chosen to be approximately optimal if  $q$  is chosen appropriately (see Theorem 4.2 below), in terms of equidistributing the error between the subintervals of the mesh when  $s^{-\alpha}$ , with  $0 < \alpha < 1/2$ , is approximated on  $[0, \lambda^*]$  in the  $L^2$  norm. That the mesh we propose on  $[0, \lambda^*]$  has this property and the appropriate choice of  $q$  as a function of  $\alpha$  is well known and dates back to Rice [55]. Similarly, the mesh on  $[\lambda^*, A]$  is chosen to be approximately optimal, in terms of equidistributing the error between the subintervals of the mesh, when  $s^{-1/2}$  is approximated on  $[\lambda^*, A]$  in the  $L^2$  norm. Finally, the choice of  $N^*$  ensures a smooth transition between the two parts of the mesh, and thus approximately the same  $L^2$  error in the two adjacent subintervals on either side of  $\lambda^*$ . In particular, in the case that  $N_{A,q} = N^*$ , it holds that  $y_{N+1}/y_N = y_N/y_{N-1}$ , so that  $y_{N-1}$  and  $y_N$  are points in both the polynomial and the geometric parts of the mesh. Note that by the mean value theorem,  $-\log(1 - 1/N) = 1/(\xi N)$  for some  $\xi \in (1 - 1/N, 1)$ , and hence

$$(4.5) \quad N_{A,q} < \frac{N \log(kA/c^*)}{q} + 1.$$

For  $a < b$  let  $\|\cdot\|_{2,(a,b)}$  denote the norm on  $L^2(a, b)$ ,  $\|f\|_{2,(a,b)} := \{\int_a^b |f(s)|^2 ds\}^{1/2}$ . Similarly, for  $f \in C[a, b]$ , let  $\|f\|_{\infty,(a,b)} := \sup_{a < s < b} |f(s)|$ . For  $A > \lambda^*$ ,  $\nu \in \mathbb{N} \cup \{0\}$ ,  $q \geq 1$ , let  $\Pi_{N,\nu} \subset L^2(0, A)$  denote the set of piecewise polynomials

$$\Pi_{N,\nu} := \{\sigma : \sigma|_{(y_{j-1}, y_j)} \text{ is a polynomial of degree } \leq \nu \text{ for } j = 1, \dots, N + N_{A,q}\},$$

and let  $P_N^*$  be the orthogonal projection operator from  $L^2(0, A)$  to  $\Pi_{N,\nu}$ , so that setting  $p = P_N^* f$  minimizes  $\|f - p\|_{2,(0,A)}$  over all  $p \in \Pi_{N,\nu}$ .

**THEOREM 4.2.** *Suppose that  $f \in C^\infty(0, \infty)$ ,  $kA > c^*$ , and  $\alpha \in (0, 1/2)$ , and that for  $m = 0, 1, 2, \dots$ , there exist constants  $c_m > 0$  such that*

$$(4.6) \quad |f^{(m)}(s)| \leq \begin{cases} c_m k^m (ks)^{-\alpha-m}, & ks \leq 1, \\ c_m k^m (ks)^{-1/2-m}, & ks \geq 1. \end{cases}$$

*Then, with the choice  $q := (2\nu + 3)/(1 - 2\alpha)$ , there exists a constant  $C_\nu$ , dependent only on  $c^*$ ,  $\nu$ , and  $\alpha$ , such that for  $N = 2, 3, \dots$ ,*

$$\|f - P_N^* f\|_{2,(0,A)} \leq \frac{C_\nu \tilde{c}_\nu (1 + \log(kA/c^*))^{1/2}}{k^{1/2} N^{\nu+1}},$$

where  $\tilde{c}_\nu := \max(c_0, c_{\nu+1})$ .

*Proof.* Throughout the proof let  $C_\nu$  denote a positive constant whose value depends on  $\nu$ ,  $c^*$ , and  $\alpha$ , not necessarily the same at each occurrence. For  $0 \leq a < b \leq A$ , let  $p_{a,b,\nu}$  denote the polynomial of degree  $\leq \nu$  which is the best approximation to  $f$  in the  $L^2$  norm on  $(a, b)$ . Then it follows from Taylor's theorem that

$$(4.7) \quad \|f - p_{a,b,\nu}\|_{2,(a,b)} \leq C_\nu (b - a)^{\nu+3/2} \|f^{(\nu+1)}\|_{\infty,(a,b)}.$$

Now

$$(4.8) \quad \|f - P_N^* f\|_{2,(0,A)}^2 = \sum_{j=1}^{N+N_{A,q}} \int_{y_{j-1}}^{y_j} |f - P_N^* f|^2 ds = \sum_{j=1}^{N+N_{A,q}} e_j,$$

where  $e_j := \|f - p_{y_{j-1}, y_j, \nu}\|_{2, (y_{j-1}, y_j)}^2$ . From the definition (4.4) we see that

$$(4.9) \quad e_1 \leq \int_0^{y_1} |f(s)|^2 ds \leq c_0^2 k^{-2\alpha} \int_0^{\lambda^*/N^q} s^{-2\alpha} ds \leq \frac{C_\nu c_0^2}{kN^{2\nu+3}}.$$

Using (4.7) we have, for  $j = 2, 3, \dots, N + N_{A,q}$ ,

$$(4.10) \quad e_j \leq C_\nu (y_j - y_{j-1})^{2\nu+3} \|f^{(\nu+1)}\|_{\infty, (y_{j-1}, y_j)}^2.$$

Further, for  $j = 2, \dots, N$ ,

$$(4.11) \quad y_j - y_{j-1} = \frac{c^*}{kN^q} [j^q - (j-1)^q] \leq \frac{c^* q j^{q-1}}{kN^q},$$

and, using (4.6) and since  $N/(j-1) \leq 2N/j$ ,

$$(4.12) \quad \|f^{(\nu+1)}\|_{\infty, (y_{j-1}, y_j)} \leq c_{\nu+1} k^{-\alpha} y_{j-1}^{-\alpha-\nu-1} \leq c_{\nu+1} k^{\nu+1} \left(\frac{2N}{j}\right)^{q(\alpha+\nu+1)}.$$

Combining (4.10)–(4.12) we see that for  $j = 2, \dots, N$ ,

$$(4.13) \quad e_j \leq \frac{C_\nu c_{\nu+1}^2}{kN^{2\nu+3}}.$$

For  $j = N+1, \dots, N_{A,q}$ , recalling (4.4) and the choice of  $N^*$  and then using (4.11),

$$y_j - y_{j-1} = y_{j-1} \left( \frac{y_j - y_{j-1}}{y_{j-1}} \right) \leq y_{j-1} \left( \frac{y_N - y_{N-1}}{y_{N-1}} \right) \leq y_{j-1} \frac{q}{N-1} \leq 2y_{j-1} \frac{q}{N}.$$

Also, from (4.6),

$$\|f^{(\nu+1)}\|_{\infty, (y_{j-1}, y_j)} \leq c_{\nu+1} k^{-1/2} y_{j-1}^{-\nu-3/2}.$$

Using these bounds in (4.10), we see that the bound (4.13) holds also for  $j = N+1, \dots, N + N_{A,q}$ . Combining (4.8), (4.9), and (4.13),

$$\|f - P_N^* f\|_{2, (0, A)}^2 \leq \frac{C_\nu \tilde{c}_\nu^2 (N + N_{A,q})}{kN^{2\nu+3}} \leq \frac{C_\nu \tilde{c}_\nu^2 (1 + \log(kA/c^*))}{kN^{2\nu+2}},$$

using (4.5). Hence the result follows.  $\square$

We assume through the remainder of the paper that  $c^* > 0$  is chosen so that

$$(4.14) \quad kL_j \geq c^*, \quad j = 1, \dots, n.$$

For  $j = 1, \dots, n$ , recalling (3.11), we define  $q_j := (2\nu + 3)/(1 - 2\alpha_j)$  and the two meshes

$$\Gamma_j^+ := \tilde{L}_{j-1} + \Lambda_{N, L_j, q_j}, \quad \Gamma_j^- := \tilde{L}_j - \Lambda_{N, L_j, q_{j+1}}.$$

Letting  $e_\pm(s) := e^{\pm iks}$ ,  $s \in [0, L]$ , we then define

$$V_{\Gamma_j^+, \nu} := \{\sigma e_+ : \sigma \in \Pi_{\Gamma_j^+, \nu}\}, \quad V_{\Gamma_j^-, \nu} := \{\sigma e_- : \sigma \in \Pi_{\Gamma_j^-, \nu}\}$$

for  $j = 1, \dots, n$ , where

$$\begin{aligned}\Pi_{\Gamma_j^+}^\nu &:= \{\sigma \in L^2(0, L) : \sigma|_{(\tilde{L}_{j-1}+y_{m-1}, \tilde{L}_{j-1}+y_m)} \text{ is a polynomial of degree } \leq \nu \\ &\quad \text{for } m = 1, \dots, N + N_{L_j, q_j}, \text{ and } \sigma|_{(0, \tilde{L}_{j-1}) \cup (\tilde{L}_j, L)} = 0\}, \\ \Pi_{\Gamma_j^-}^\nu &:= \{\sigma \in L^2(0, L) : \sigma|_{(\tilde{L}_j-\tilde{y}_m, \tilde{L}_j-\tilde{y}_{m-1})} \text{ is a polynomial of degree } \leq \nu \\ &\quad \text{for } m = 1, \dots, N + N_{L_j, q_{j+1}}, \text{ and } \sigma|_{(0, \tilde{L}_{j-1}) \cup (\tilde{L}_j, L)} = 0\},\end{aligned}$$

with  $0 = y_0 < y_1 < \dots < y_{N+N_{L_j, q_j}} = L_j$  the points of the mesh  $\Lambda_{N, L_j, q_j}$  and  $0 = \tilde{y}_0 < \tilde{y}_1 < \dots < \tilde{y}_{N+N_{L_j, q_{j+1}}} = \tilde{L}_j$  the points of the mesh  $\Lambda_{N, L_j, q_{j+1}}$ . We define  $P_N^+$  and  $P_N^-$  to be the orthogonal projection operators from  $L^2(0, L)$  onto  $\Pi_{\Gamma^+}^\nu$  and  $\Pi_{\Gamma^-}^\nu$ , respectively, where  $\Pi_{\Gamma^\pm}^\nu$  denotes the linear span of  $\bigcup_{j=1, \dots, n} \Pi_{\Gamma_j^\pm}^\nu$ . We also define the functions  $v_\pm \in L^2(0, L)$  by

$$v_+(s) := v_j^+(s), \quad v_-(s) := v_j^-(s), \quad \tilde{L}_{j-1} < s < \tilde{L}_j, \quad j = 1, \dots, n.$$

We then have the following error estimate, in which  $u_M$  is as defined in (3.10) and we abbreviate  $\|\cdot\|_{2, (0, L)}$  by  $\|\cdot\|_2$ .

**THEOREM 4.3.** *There exists a constant  $C_\nu > 0$ , dependent only on  $c^*$ ,  $\nu$ , and  $\Omega_1, \Omega_2, \dots, \Omega_n$ , such that*

$$\|v_+ - P_N^+ v_+\|_2 \leq C_\nu u_M \frac{n^{1/2} (1 + \log(k\bar{L}/c^*))^{1/2}}{k^{1/2} N^{\nu+1}},$$

where  $\bar{L} := (L_1 \dots L_n)^{1/n}$ , with an identical bound holding on  $\|v_- - P_N^- v_-\|_2$ .

*Proof.* From Theorem 3.2, Corollary 3.4, and Theorem 4.2,

$$\|v_+ - P_N^+ v_+\|_2^2 = \sum_{j=1}^n \|v_j^+ - P_N^+ v_j^+\|_{2, (\tilde{L}_{j-1}, \tilde{L}_j)}^2 \leq n \frac{C_\nu^2 u_M^2 (1 + \log(k\bar{L}))}{k N^{2\nu+2}},$$

and the result follows.  $\square$

Our approximation space  $V_{\Gamma, \nu}$  is the linear span of

$$\bigcup_{j=1, \dots, n} \{V_{\Gamma_j^+}^\nu \cup V_{\Gamma_j^-}^\nu\}.$$

The dimension of this approximation space, i.e., the number of degrees of freedom, is

$$(4.15) \quad M_N = 2(\nu + 1) \sum_{j=1}^n (N + N_{L_j, q_j}) < 2(\nu + 1) n N (1 + N^{-1} + \log(k\bar{L}/c^*))$$

by (4.5). We define  $P_N$  to be the operator of orthogonal projection from  $L^2(0, L)$  onto  $V_{\Gamma, \nu}$ . It remains to prove a bound on  $\|\varphi - P_N \varphi\|_2$ , showing that our mesh and approximation space are well adapted to approximating  $\varphi$ .

To use Theorem 4.3 we note from (3.9) and (4.2) that  $\varphi = \frac{i}{2}(e_+ v_+ + e_- v_-)$ . But  $e_+ P_N^+ v_+ + e_- P_N^- v_- \in V_{\Gamma, \nu}$  and  $P_N \varphi$  is the best approximation to  $\varphi$  in  $V_{\Gamma, \nu}$ . Applying



Theorem 4.3 we thus have that

$$\begin{aligned}
\|\varphi - P_N \varphi\|_2 &\leq \left\| \varphi - \frac{i}{2}(e_+ P_N^+ v_+ + e_- P_N^- v_-) \right\|_2 \\
&= \frac{1}{2} \|e_+(v_+ - P_N^+ v_+) + e_-(v_- - P_N^- v_-)\|_2 \\
&\leq \|e_+\|_\infty \|v_+ - P_N^+ v_+\|_2 + \|e_-\|_\infty \|v_- - P_N^- v_-\|_2 \\
&\leq C_\nu u_M \frac{n^{1/2}(1 + \log^{1/2}(k\bar{L}))}{k^{1/2} N^{\nu+1}}.
\end{aligned}$$

Combining this bound with (4.15), we obtain the following main result of the paper. We remind the reader that we are assuming throughout that (4.14) holds.

**THEOREM 4.4.** *There exist positive constants  $C_\nu$  and  $C'_\nu$ , depending only on  $c^*$ ,  $\nu$ , and  $\Omega_1, \Omega_2, \dots, \Omega_n$ , such that*

$$k^{1/2} \|\varphi - P_N \varphi\|_2 \leq C_\nu u_M \frac{n^{1/2}(1 + \log(k\bar{L}/c^*))^{1/2}}{N^{\nu+1}} \leq C'_\nu u_M \frac{(n[1 + \log(k\bar{L}/c^*)])^{\nu+3/2}}{M_N^{\nu+1}}.$$

A comment on the factor  $k^{1/2}$  on the left-hand side is probably helpful. Reflecting that the solution of the physical problem must be independent of the unit of length measurement and that we are designing our numerical scheme to preserve this property, it is easy to see that the values of both  $k^{1/2} \|\varphi\|_2$  and  $k^{1/2} \|\varphi - P_N \varphi\|_2$  remain fixed as  $k$  changes if we keep  $kL_j$  fixed for  $j = 1, \dots, n$  (and also, of course, keep  $\Omega_j$ ,  $j = 1, \dots, n$ ,  $c^*$ , and  $\nu$  fixed). Thus inclusion of the factor  $k^{1/2}$  ensures that the value of  $k^{1/2} \|\varphi - P_N \varphi\|_2$  is independent of the unit of length measurement as are the bounds on the right-hand side.

**5. Galerkin method.** Theorem 4.4 has shown that it is possible to approximate accurately the solution of the integral equation (4.3) with a number of degrees of freedom that grows only very modestly as the wave number increases. To select an approximation,  $\varphi_N$ , from the approximation space  $V_{\Gamma, \nu}$  we use the Galerkin method. Let  $(\cdot, \cdot)$  denote the usual inner product on  $L^2(0, L)$ , defined by  $(\chi_1, \chi_2) := \int_0^L \chi_1(s) \bar{\chi}_2(s) ds$ , so that  $\|\chi\|_2 = (\chi, \chi)^{1/2}$ . Then our Galerkin method approximation  $\varphi_N \in V_{\Gamma, \nu}$  is defined by

$$(5.1) \quad (\varphi_N, \rho) + (K\varphi_N, \rho) = (F, \rho) \quad \text{for all } \rho \in V_{\Gamma, \nu};$$

equivalently

$$(5.2) \quad \varphi_N + P_N K \varphi_N = P_N F.$$

Our goal now is to show that (5.2) has a unique solution  $\varphi_N$ , to establish a bound on the error  $\|\varphi - \varphi_N\|_2$  in this numerical method, and to relate this error to the best approximation error  $\|\varphi - P_N \varphi\|_2$ . We begin by establishing that  $I + P_N K$  is invertible if  $N$  is large enough. We remind the reader (see the end of section 2) that we are assuming that  $\eta \in \mathbb{R}$ , the coupling parameter in the integral equation, is chosen with  $\eta \neq 0$ , which ensures that  $I + K$  is invertible.

**THEOREM 5.1.** *For all  $v \in L^2(0, L)$ ,  $\|P_N v - v\|_2 \rightarrow 0$  as  $N \rightarrow \infty$ .*

*Proof.* Since  $\|P_N\|_2 = 1$ , it is enough to show that  $P_N v \rightarrow v$  in  $L^2(0, L)$  for all  $v \in C^\infty[0, L]$ , a dense subset of  $L^2(0, L)$ . But this follows from Theorem 4.2 and the definition of  $P_N$ .  $\square$

THEOREM 5.2. *There exists a constant  $N^* \geq 2$ , dependent only on  $\Gamma$ ,  $k$ , and  $\eta$ , such that, for  $N \geq N^*$ , the operator  $I + P_N K : L^2(0, L) \rightarrow L^2(0, L)$  is bijective with*

$$(5.3) \quad C_s := \sup_{N \geq N^*} \|(I + P_N K)^{-1}\|_2 < \infty,$$

so that (5.2) has exactly one solution for  $N \geq N^*$ .

*Proof.* Recalling the discussion at the end of section 2, we note that it holds that  $K = K_1 + K_2$ , where  $\|K_1\|_2 < 1$  and  $K_2$  is a compact operator on  $L^2(0, L)$ . Since  $\|P_N K_1\|_2 \leq \|K_1\|_2 < 1$ ,  $I + P_N K_1$  is invertible and  $\|(I + P_N K_1)^{-1}\|_2 \leq (1 - \|K_1\|_2)^{-1}$ . Since  $K_2$  is compact and  $I + K$  is injective, it follows from Theorem 5.1 and standard perturbation arguments for projection methods (e.g., [7, Theorem 8.2.1], [17]) that  $(I + P_N K)^{-1}$  exists and is uniformly bounded for all  $N$  sufficiently large.  $\square$

From (4.3) and (5.2) it follows that  $\varphi - \varphi_N = (I + P_N K)^{-1}(\varphi - P_N \varphi)$ , and hence

$$(5.4) \quad \|\varphi - \varphi_N\|_2 \leq \|(I + P_N K)^{-1}\|_2 \|\varphi - P_N \varphi\|_2.$$

Combining (5.3) and (5.4) with Theorem 4.4, we obtain our final error estimate.

THEOREM 5.3. *There exist positive constants  $C_\nu$  and  $C'_\nu$ , depending only on  $c^*$ ,  $\nu$ , and  $\Omega_1, \Omega_2, \dots, \Omega_n$ , such that*

$$(5.5) \quad \begin{aligned} k^{1/2} \|\varphi - \varphi_N\|_2 &\leq C_s C_\nu u_M \frac{n^{1/2} (1 + \log(k\bar{L}/c^*))^{1/2}}{N^{\nu+1}} \\ &\leq C_s C'_\nu u_M \frac{(n[1 + \log(k\bar{L}/c^*)])^{\nu+3/2}}{M_N^{\nu+1}} \end{aligned}$$

for  $N \geq N^*$ , where  $N^*$  and  $C_s$  are as defined in Theorem 5.2.

Note that we will take  $c^* = 2\pi$  and  $\eta = k$  in all our numerical calculations in the next section. Note also that, while the constants  $C_\nu$  and  $C'_\nu$ , from the best approximation theorem, Theorem 4.4, depend only on  $c^*$ ,  $\nu$ , and the corner angles of  $\Gamma$ , the numbers  $N^*$  and  $C_s$  depend additionally on  $k$ ,  $L_1, L_2, \dots, L_n$ , and  $\eta$ . We do not attempt the difficult task of elucidating this dependence in this paper. We note only that, very recently, for the boundary integral equation formulation (2.9) applied to scattering by a circle, Domínguez, Graham, and Smyshlyaev [28] have shown that  $\mathcal{I} + \mathcal{K}$  is elliptic if  $\eta = \pm k$  and  $k$  is sufficiently large, so that every Galerkin method is automatically stable; specifically, (5.3) holds for every  $N^*$  if  $P_N$  is the orthogonal projection from  $L^2(0, L)$  onto the Galerkin approximation space. Further it follows from results in [28] that, at worst,  $C_s = O(k^{1/3})$  as  $k \rightarrow \infty$  in the circle case. Our numerical results in section 6 will suggest the stronger result that for our particular scheme and geometry, the bound of Theorem 5.3 holds with a constant  $C_s$  independent of  $k$ . We recall from section 2 (2.12) that it has been shown that the corresponding continuous continuity constant  $C_S = O(1)$  as  $k \rightarrow \infty$  if the choice  $\eta = k$  is made.

Of course our aim in approximating  $\varphi$  by  $\varphi_N$  is to approximate  $\partial_{\mathbf{n}}^+ u$  and hence, via (2.7), the solution  $u$  of the scattering problem. Clearly, from (3.8) and (4.2), an approximation to  $\partial u / \partial \mathbf{n}$  is

$$\frac{\partial u}{\partial \mathbf{n}}(\mathbf{x}(s)) \approx k(\Psi(s) + \varphi_N(s)), \quad 0 \leq s \leq L.$$

Using this approximation in (2.7), we conclude that

$$(5.6) \quad u(\mathbf{x}) \approx u_N(\mathbf{x}) := u^i(\mathbf{x}) - k \int_0^L \Phi(\mathbf{x}, \mathbf{x}(s)) [\Psi(s) + \varphi_N(s)] ds, \quad \mathbf{x} \in D.$$

Theorem 5.3 implies the following error estimate.

**THEOREM 5.4.** *There exist positive constants  $C_\nu$  and  $C'_\nu$ , depending only on  $c^*$ ,  $\nu$ , and  $\Omega_1, \Omega_2, \dots, \Omega_n$ , such that*

$$\frac{\sup_{\mathbf{x} \in D} |u(\mathbf{x}) - u_N(\mathbf{x})|}{\sup_{\mathbf{x} \in D} |u(\mathbf{x})|} \leq C_s C_\nu \frac{n(1 + \log(k\bar{L}/c^*))}{N^{\nu+1}} \leq C_s C'_\nu \frac{(n[1 + \log(k\bar{L}/c^*)])^{\nu+2}}{M_N^{\nu+1}}$$

for  $N \geq N^*$ , where  $N^*$  and  $C_s$  are as defined in Theorem 5.2.

*Proof.* From (2.7) and (5.6),

$$\begin{aligned} |u(\mathbf{x}) - u_N(\mathbf{x})| &= k \left| \int_0^L \Phi(\mathbf{x}, \mathbf{x}(s)) [\varphi(s) - \varphi_N(s)] ds \right| \\ &\leq \frac{k}{4} \left\{ \int_0^L |H_0^{(1)}(k|\mathbf{x} - \mathbf{x}(s)|)|^2 ds \right\}^{1/2} \|\varphi - \varphi_N\|_2 \\ &\leq \frac{k}{4} \left\{ 2 \sum_{j=1}^n \int_0^{L_j/2} |H_0^{(1)}(kt)|^2 dt \right\}^{1/2} \|\varphi - \varphi_N\|_2 \\ &\leq C_\nu k^{1/2} n^{1/2} (1 + \log(k\bar{L}/c^*))^{1/2} \|\varphi - \varphi_N\|_2, \end{aligned}$$

where we have used that  $|H_0^{(1)}(t)|$  is a monotonic decreasing function of  $t$  on  $(0, \infty)$  and that  $|H_0^{(1)}(t)| = O(t^{-1/2})$  as  $t \rightarrow \infty$  (see e.g., [2]). The result now follows from Theorem 5.3.  $\square$

**6. Numerical results.** There has been much work on the optimal choice of the parameter  $\eta$  in (2.9) (see, e.g., [3, 43]). Here we choose  $\eta = k$  as in [28]. We also set  $c^* = 2\pi$  and restrict attention to the case  $\nu = 0$ . For higher values of  $\nu$  the implementation of the scheme is similar. Note that, with  $c^* = 2\pi$  and  $\nu = 0$ , there are approximately  $N$  degrees of freedom used to represent the solution in the first wavelength on each side adjacent to a corner.

The equation we wish to solve is (5.1) with  $\nu = 0$ . Writing  $\varphi_N$  as a linear combination of the basis functions of  $V_{\Gamma,0}$ , we have

$$\varphi_N(s) = \sum_{j=1}^{M_N} v_j \rho_j(s), \quad 0 \leq s \leq L,$$

where  $\rho_j$  is the  $j$ th basis function and  $M_N$  is the dimension of  $V_{\Gamma,0}$ . For  $p = 1, \dots, n$ , where  $n$  is the number of sides of the polygon, we define  $n_p^\pm$  to be the number of points in the mesh  $\Gamma_p^\pm$ , so that  $n_p^+ = N + N_{L_p, q_p}$ ,  $n_p^- = N + N_{L_p, q_{p+1}}$ , and we denote the points of the mesh  $\Gamma_p^\pm$  by  $s_{p,l}^\pm$  for  $l = 1, \dots, n_p^\pm$ , with  $s_{p,1}^\pm < \dots < s_{p,n_p^\pm}^\pm$ . Setting  $n_1 := 0$ ,  $n_p := \sum_{j=1}^{p-1} (n_j^+ + n_j^-)$  for  $p = 2, \dots, n-1$ , we define, for  $p = 1, \dots, n$ ,

$$\rho_{n_p+j}(s) := \begin{cases} e^{iks} \chi_{(s_{p,j-1}^+, s_{p,j}^+)}(s) / \sqrt{s_{p,j}^+ - s_{p,j-1}^+}, & j = 1, \dots, n_p^+, \\ e^{-iks} \chi_{(s_{p,j-1}^-, s_{p,j}^-)}(s) / \sqrt{s_{p,j}^- - s_{p,j-1}^-}, & j = n_p^+ + 1, \dots, n_p^+ + n_p^-, \end{cases}$$

where  $\chi_{(y_1, y_2)}$  denotes the characteristic function of the interval  $(y_1, y_2)$ . From (4.15),  $M_N = \sum_{j=1}^n (n_j^+ + n_j^-) < 2nN(3/2 + \log(k\bar{L}/c^*))$ .

Equation (5.1) with  $\nu = 0$  is equivalent to the linear system

$$(6.1) \quad \sum_{j=1}^{M_N} v_j((\rho_j, \rho_m) + (K\rho_j, \rho_m)) = (F, \rho_m), \quad m = 1, \dots, M_N.$$

In order to set up this linear system we need to determine the integrals  $(\rho_j, \rho_m)$ ,  $(K\rho_j, \rho_m)$ , and  $(F, \rho_m)$ . We note that many of the integrals  $(K\rho_j, \rho_m)$  and  $(F, \rho_m)$  are highly oscillatory; in particular, all these integrals become highly oscillatory in the limit as  $k \rightarrow \infty$  with  $N$  fixed. The efficient calculation of these integrals is an aspect of the numerical scheme which requires further research, as discussed in section 1.2. But note that explicit formulae for the analytic evaluation of some of these integrals, and a consideration of the quadrature techniques required to evaluate the rest of them numerically, are presented in [44].

Another important issue is the conditioning of the linear system. Standard analysis of the Galerkin method for second kind equations [7] implies that, where  $M := [(\rho_j, \rho_m)]$  is the mass matrix (which is necessarily Hermitian and positive definite) and  $A = [(\rho_j, \rho_m) + (K\rho_j, \rho_m)]$  is the whole matrix, it holds that  $\text{cond}_2 A \leq C_s \text{cond}_2 M$ , where  $C_s$  is defined by (5.3). Thus Theorem 5.2 implies that  $\text{cond}_2 A$  is bounded as  $N \rightarrow \infty$  if the mass matrix is well conditioned. Unfortunately, it appears that, as  $N \rightarrow \infty$  with  $k$  fixed,  $M$  must ultimately become badly conditioned. However, the results below will show only moderate condition numbers of  $A$  even for large values of  $N$  (see Table 6.1). More positively, in the limit as  $k \rightarrow \infty$  with  $N$  fixed,  $\text{cond}_2 M \rightarrow 1$ . To see this we observe that if  $(\rho_j, \rho_m)$  is a nonzero off-diagonal element of the mass matrix (in which case the supports of  $\rho_j$  and  $\rho_m$  are overlapping subintervals of the meshes  $\Gamma_p^+$  and  $\Gamma_p^-$  for some side  $p$ ), it holds that  $|(\rho_j, \rho_m)| = |\sin(ko)|\sqrt{o/(kS_1S_2)}$ , where  $S_1$  and  $S_2$  are the lengths of the two subintervals, and  $o$  is the length of the overlap.

As a numerical example, we consider the problem of scattering by a square with sides of length  $2\pi$ . In this case  $n = 4$  and  $\Omega_j = 3\pi/2$ ,  $j = 1, 2, 3, 4$ . The corners of the square are  $P_1 := (0, 0)$ ,  $P_2 := (2\pi, 0)$ ,  $P_3 := (2\pi, 2\pi)$ ,  $P_4 := (0, 2\pi)$ , and the incident angle is  $\theta = \pi/4$ , so the incident field is directed towards  $P_4$ , with  $P_2$  in shadow (as shown in Figure 6.1, where the total acoustic field is plotted for  $k = 10$ ).

In Figure 6.2 we plot  $|\varphi_N(s)|$  against  $s$  for  $k = 10$  and  $N = 4, 16, 64, 256$ . As we expect,  $|\varphi_N(s)|$  is highly peaked at the corners of the polygon,  $s = 0, 2\pi, 4\pi, 6\pi$  and  $8\pi$  (which is the same corner as  $s = 0$ ), where  $\varphi(s)$  is infinite. Except at these corners,  $|\varphi_N(s)|$  appears to be converging pointwise as  $N$  increases. (We do not plot  $\varphi_N(s)$  itself, which is highly oscillatory.)

In order to test the convergence of our scheme, we take the “exact” solution to be that computed with a large number of degrees of freedom, namely with  $N = 256$ . For  $k = 5$  and  $k = 320$  the relative  $L^2$  errors  $\|\varphi_N - \varphi_{256}\|_2 / \|\varphi_{256}\|_2$  are shown in Table 6.1 (all  $L^2$  norms are computed by approximating by discrete  $L^2$  norms, sampling at 100000 evenly spaced points around the boundary of the square). For this example, Theorem 5.3 predicts that for  $N \geq N^*$ ,  $\|\varphi - \varphi_N\|_2 \leq CN^{-1}$ , where  $C$  is a constant. Thus Theorem 5.3 predicts that for  $N > N^*$ , the average rate of convergence is

$$EOC := \frac{\log(\|\varphi - \varphi_N\|_2 / \|\varphi - \varphi_{N^*}\|_2)}{\log(N/N^*)} \geq 1 - \frac{\hat{C}}{\log(N/N^*)} \sim 1$$

as  $N \rightarrow \infty$ , where  $\hat{C} := \log(\|\varphi - \varphi_N\|_2 / C)$ . This behavior is clearly seen in the *EOC*

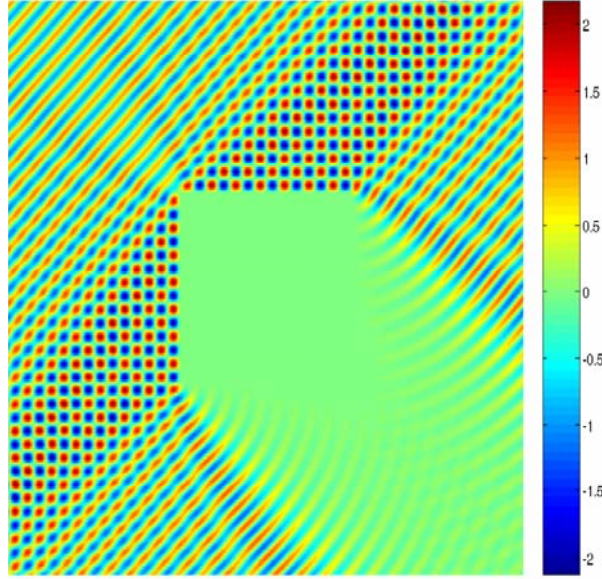


FIG. 6.1. Total acoustic field, scattering by a square,  $k = 10$ . Incident field is directed from the top left corner towards the bottom right corner.

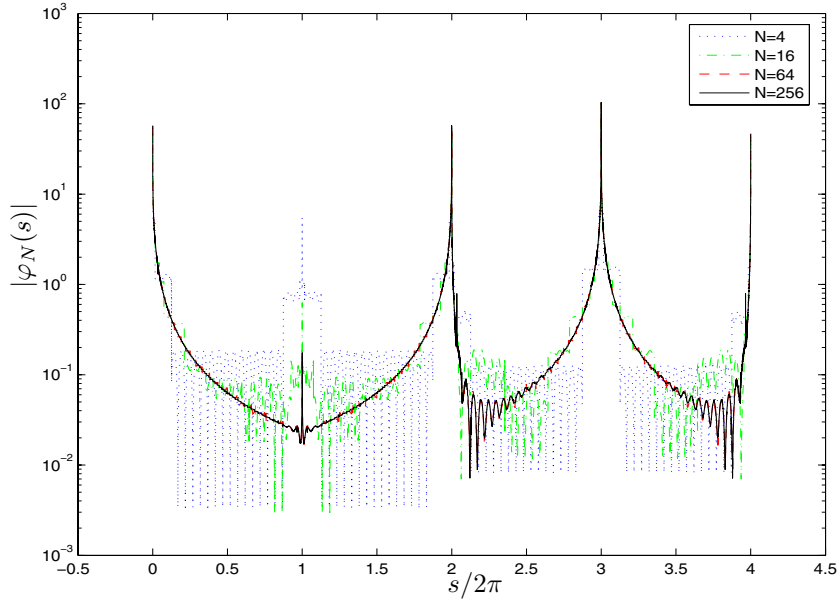


FIG. 6.2.  $|\varphi_N(s)|$  plotted against  $s$ , various  $N$ , for scattering by a square of side length ten wavelengths.

values (defined with  $N^* = 8$ ) in Table 6.1 for both values of  $k$ . We also show in Table 6.1 the 2 norm condition number,  $\text{cond}_2 A$ , of the matrix  $A = [(\rho_j, \rho_m) + (K\rho_j, \rho_m)]$  for each example. Unlike methods where the approximation space is formed by multiplying standard finite element basis functions by many plane waves travelling in a large number of directions [27, 53, 37], the condition number does not grow signifi-

TABLE 6.1  
Errors and relative  $L^2$  errors, various  $N$ ,  $k = 5$ , and  $k = 320$ .

$k$	$N$	$M_N$	$k^{1/2}\ \varphi_N - \varphi_{256}\ _2$	$\ \varphi_N - \varphi_{256}\ _2/\ \varphi_{256}\ _2$	$EOC$	$\text{cond}_2 A$
5	8	88	$5.7339 \times 10^{-1}$	$2.4426 \times 10^{-1}$		$9.5 \times 10^0$
	16	176	$3.7454 \times 10^{-1}$	$1.5955 \times 10^{-1}$	0.6	$4.6 \times 10^1$
	32	360	$1.6176 \times 10^{-1}$	$6.8909 \times 10^{-2}$	0.9	$2.6 \times 10^1$
	64	712	$7.7267 \times 10^{-2}$	$3.2916 \times 10^{-2}$	1.0	$2.4 \times 10^2$
	128	1416	$3.3541 \times 10^{-2}$	$1.4289 \times 10^{-2}$	1.0	$1.5 \times 10^3$
320	8	120	$7.0765 \times 10^{-1}$	$3.6736 \times 10^{-1}$		$2.4 \times 10^2$
	16	240	$5.9792 \times 10^{-1}$	$3.1040 \times 10^{-1}$	0.2	$6.9 \times 10^2$
	32	472	$1.9668 \times 10^{-1}$	$1.0211 \times 10^{-1}$	0.9	$8.1 \times 10^2$
	64	944	$7.5808 \times 10^{-2}$	$3.9354 \times 10^{-2}$	1.1	$1.1 \times 10^3$
	128	1888	$4.8814 \times 10^{-2}$	$2.5341 \times 10^{-2}$	1.0	$3.8 \times 10^3$

TABLE 6.2  
Errors and relative  $L^2$  errors, various  $k$ ,  $N = 64$ .

$k$	$M_N$	$k^{1/2}\ \varphi_{64} - \varphi_{256}\ _2$	$\ \varphi_{64} - \varphi_{256}\ _2/\ \varphi_{256}\ _2$	$\text{cond}_2 A$
5	712	$7.7267 \times 10^{-2}$	$3.2916 \times 10^{-2}$	$2.4 \times 10^2$
10	752	$6.6373 \times 10^{-2}$	$2.8702 \times 10^{-2}$	$8.4 \times 10^1$
20	792	$3.8309 \times 10^{-1}$	$1.6914 \times 10^{-1}$	$5.1 \times 10^3$
40	824	$1.3162 \times 10^{-1}$	$5.9856 \times 10^{-2}$	$1.2 \times 10^3$
80	864	$7.4315 \times 10^{-2}$	$3.4801 \times 10^{-2}$	$2.7 \times 10^3$
160	904	$7.0884 \times 10^{-2}$	$3.4570 \times 10^{-2}$	$1.4 \times 10^3$
320	944	$7.5808 \times 10^{-2}$	$3.9354 \times 10^{-2}$	$1.1 \times 10^3$
640	984	$6.4280 \times 10^{-2}$	$3.5693 \times 10^{-2}$	$1.5 \times 10^3$

TABLE 6.3  
Relative errors,  $|u_N(\mathbf{x}) - u_{256}(\mathbf{x})|/|u_{256}(\mathbf{x})|$ , as a function of  $N$ , at three points  $\mathbf{x}$ .

$k$	$N$	$\mathbf{x} = (-\pi, 3\pi)$	$\mathbf{x} = (3\pi, 3\pi)$	$\mathbf{x} = (3\pi, -\pi)$
5	4	$1.9587 \times 10^{-2}$	$1.0071 \times 10^{-3}$	$1.5885 \times 10^{-2}$
	8	$4.2629 \times 10^{-3}$	$2.8031 \times 10^{-3}$	$2.3215 \times 10^{-3}$
	16	$3.6284 \times 10^{-4}$	$3.1410 \times 10^{-4}$	$1.3513 \times 10^{-3}$
	32	$6.7523 \times 10^{-5}$	$2.9803 \times 10^{-5}$	$1.7939 \times 10^{-5}$
	64	$1.2675 \times 10^{-5}$	$5.9626 \times 10^{-6}$	$4.6158 \times 10^{-6}$
320	4	$2.2938 \times 10^{-3}$	$2.9350 \times 10^{-3}$	$2.0897 \times 10^{-2}$
	8	$4.3176 \times 10^{-3}$	$1.5157 \times 10^{-3}$	$1.1652 \times 10^{-2}$
	16	$3.3908 \times 10^{-3}$	$9.6409 \times 10^{-4}$	$9.3922 \times 10^{-3}$
	32	$3.3898 \times 10^{-4}$	$1.6984 \times 10^{-4}$	$9.0526 \times 10^{-4}$
	64	$1.0022 \times 10^{-4}$	$9.6493 \times 10^{-5}$	$2.6204 \times 10^{-4}$

cantly as the number of degrees of freedom increases.

In Table 6.2 we fix  $N = 64$  and show  $\|\varphi_{64} - \varphi_{256}\|_2/\|\varphi_{256}\|_2$  and  $k^{1/2}\|\varphi_{64} - \varphi_{256}\|_2$  for increasing values of  $k$ . Both measures of errors remain approximately constant in magnitude as  $k$  increases. Recall that, keeping  $N$  fixed as  $k$  increases corresponds to keeping the number of degrees of freedom per wavelength fixed near each corner and increasing the total number of degrees of freedom,  $M_N$ , approximately in proportion to  $\log(k\bar{L})$ . Thus these results are consistent with the approximation error estimate of Theorem 4.2 which suggests that increasing  $M_N$  proportional to  $\log^{3/2}(k\bar{L})$  is enough to keep the error bounded; indeed these results are suggestive that the bound (5.5) in the Galerkin error estimate, Theorem 5.3, holds with a constant  $C_s$  which is independent of  $k$ . Note that the condition number of the coefficient matrix  $A$  only increases modestly as  $k$  increases, and is approximately constant for  $k \geq 40$ .

In Table 6.3 we show numerical convergence of the total field  $u_N(\mathbf{x})$  at the three

points  $\mathbf{x} = (-\pi, 3\pi)$  (illuminated),  $\mathbf{x} = (3\pi, 3\pi)$ , and  $\mathbf{x} = (3\pi, -\pi)$  (shadow), for  $k = 5$  and  $k = 320$ . The errors are consistent with the estimate of Theorem 5.4. As might be expected for the computation of linear functionals of  $\varphi_N$ , the relative errors in Table 6.3 are a lot smaller and converge to zero more rapidly than the relative errors in the computation of the boundary data in Tables 6.1 and 6.2.

**7. Conclusions.** In this paper we have described a novel Galerkin boundary integral equation method for solving problems of high frequency scattering by convex polygons. In section 2, building on previous results for Lipschitz domains [56, 48, 50, 49], we have shown that the standard second kind boundary integral equations for the exterior Dirichlet problem for the Helmholtz equation are well-posed for general Lipschitz domains in a scale of Sobolev spaces. We have understood very completely in section 3 the oscillatory behavior of the normal derivative of the field on the boundary of the polygon. We have then used this understanding to design an optimal graded mesh for approximation of the diffracted field by products of piecewise polynomials and plane waves. Our error analysis demonstrates that the number of degrees of freedom required to achieve a prescribed level of accuracy using the best approximation to the solution from the approximation space grows only logarithmically with respect to the wave number  $k$  as  $k \rightarrow \infty$ . Numerical experiments indicate that the same statement holds for the Galerkin approximation from the same approximation space. However, while we have established that the error in the Galerkin approximation space is bounded by the stability constant  $C_s$  times the best approximation error, our Theorem 5.3 holds only for a sufficiently refined mesh and we have not established a bound on  $C_s$  which is independent of  $k$ , to mirror the recently established bound (2.12) on the corresponding continuous stability constant.

There are very many open problems in extending the results of this paper to more general scatterers. In this extension we expect that our mesh design and parts of our analysis will have relevance for representing certain components of the total field. For example, in the case of 2D convex curvilinear polygons, something close to the mesh grading we use may be appropriate on each side of the polygon, especially at higher frequencies when the waves diffracted by the corners become more localized near the corners. In the case of three-dimensional scattering by convex polyhedra, it seems to us that the mesh we propose may be useful in representing the variation of edge scattered waves in the direction perpendicular to the edge.

**Acknowledgments.** The authors gratefully acknowledge helpful discussions with Markus Melenk (Vienna) and Johannes Elschner (WIAS, Berlin) and the helpful comments of the anonymous referees.

## REFERENCES

- [1] T. ABBOUD, J.-C. NÉDÉLEC, AND B. ZHOU, *Méthode des équations intégrales pour les hautes fréquences*, C. R. Acad. Sci. Paris Sér. I Math., 318 (1994), pp. 165–170.
- [2] M. ABRAMOWITZ AND I. STEGUN, *Handbook of Mathematical Functions*, Dover, New York, 1972.
- [3] S. AMINI, *On the choice of the coupling parameter in boundary integral formulations of the exterior acoustic problem*, Appl. Anal., 35 (1990), pp. 75–92.
- [4] S. AMINI AND N. D. MAINES, *Preconditioned Krylov subspace methods for boundary element solution of the Helmholtz equation*, Internat. J. Numer. Methods Engrg., 41 (1998), pp. 875–898.
- [5] S. AMINI AND A. T. J. PROFIT, *Multi-level fast multipole Galerkin method for the boundary integral solution of the exterior Helmholtz equation*, in Current Trends in Scientific Computing (Xi'an, 2002), Contemp. Math. 329, AMS, Providence, RI, 2003, pp. 13–19.

- [6] S. ARDEN, S. N. CHANDLER-WILDE, AND S. LANGDON, *A collocation method for high frequency scattering by convex polygons*, J. Comput. Appl. Math., to appear.
- [7] K. E. ATKINSON, *The Numerical Solution of Integral Equations of the Second Kind*, Cambridge University Press, Cambridge, UK, 1997.
- [8] I. BABUŠKA AND J. M. MELENK, *The partition of unity method*, Internat. J. Numer. Methods Engrg., 40 (1997), pp. 727–758.
- [9] I. M. BABUŠKA AND S. A. SAUTER, *Is the pollution effect of the FEM avoidable for the Helmholtz equation considering high wave numbers?*, SIAM J. Numer. Anal., 34 (1997), pp. 2392–2423. Reprinted in SIAM Rev., 42 (2000), pp. 451–484.
- [10] J. J. BOWMAN, T. B. A. SENIOR, AND P. L. E. USLENGHI, *Electromagnetic and Acoustic Scattering by Simple Shapes*, North-Holland, Amsterdam, 1969.
- [11] H. BRAKHAGE AND P. WERNER, *Über das Dirichletsche Aussenraumproblem für die Helmholtzsche Schwingungsgleichung*, Arch. Math., 16 (1965), pp. 325–329.
- [12] O. P. BRUNO, C. A. GEUZAINÉ, J. A. MONRO, JR., AND F. REITICH, *Prescribed error tolerances within fixed computational times for scattering problems of arbitrarily high frequency: The convex case*, Philos. Trans. R. Soc. Lond. Ser. A Math. Phys. Eng. Sci., 362 (2004), pp. 629–645.
- [13] O. P. BRUNO AND L. A. KUNYANSKY, *A fast, high-order algorithm for the solution of surface scattering problems: Basic implementation, tests, and applications*, J. Comput. Phys., 169 (2001), pp. 80–110.
- [14] A. BUFFA AND S. SAUTER, *On the acoustic single layer potential: Stabilization and Fourier analysis*, SIAM J. Sci. Comput., 28 (2006), pp. 1974–1999.
- [15] A. J. BURTON AND G. F. MILLER, *The application of integral equation methods to the numerical solution of some exterior boundary-value problems*, Proc. Roy. Soc. Lond. Ser. A, 323 (1971), pp. 201–210.
- [16] O. CESSENAT AND B. DESPRÉS, *Using plane waves as base functions for solving time harmonic equations with the ultra weak variational formulation*, J. Comput. Acoust., 11 (2003), pp. 227–238.
- [17] G. CHANDLER, *Galerkin's method for boundary integral equations on polygonal domains*, J. Aust. Math. Soc. Ser. B, 26 (1984), pp. 1–13.
- [18] S. N. CHANDLER-WILDE, *Boundary value problems for the Helmholtz equation in a half-plane*, in Proceedings of the Third International Conference on Mathematical and Numerical Aspects of Wave Propagation, G. Cohen, ed., SIAM, Philadelphia, 1995, pp. 188–197.
- [19] S. N. CHANDLER-WILDE, S. LANGDON, AND L. RITTER, *A high-wavenumber boundary-element method for an acoustic scattering problem*, Philos. Trans. R. Soc. Lond. Ser. A Math. Phys. Eng. Sci., 362 (2004), pp. 647–671.
- [20] S. N. CHANDLER-WILDE AND P. MONK, *Wave-number-explicit bounds in time-harmonic scattering*, SIAM J. Math. Anal., submitted.
- [21] W. C. CHEW, J. M. SONG, T. J. CUI, S. VELAMPARAMBIL, M. L. HASTRITER, AND B. HU, *Review of large scale computing in electromagnetics with fast integral equation solvers*, CMES Comput. Model. Eng. Sci., 5 (2004), pp. 361–372.
- [22] S. H. CHRISTIANSEN AND J. C. NÉDÉLEC, *Preconditioners for the numerical solution of boundary integral equations from electromagnetism*, C. R. Acad. Sci. Paris Sér. I Math., 331 (2000), pp. 733–738 (in French).
- [23] D. L. COLTON AND R. KRESS, *Integral Equation Methods in Scattering Theory*, Wiley, New York, 1983.
- [24] D. COLTON AND R. KRESS, *Inverse Acoustic and Electromagnetic Scattering Theory*, Springer-Verlag, Berlin, 1992.
- [25] E. DARRIGRAND, *Coupling of fast multipole method and microlocal discretization for the 3-D Helmholtz equation*, J. Comput. Phys., 181 (2002), pp. 126–154.
- [26] E. DARVE AND P. HAVÉ, *A fast multipole method for Maxwell equations stable at all frequencies*, Philos. Trans. R. Soc. Lond. Ser. A Math. Phys. Eng. Sci., 362 (2004), pp. 603–628.
- [27] A. DE LA BOURDONNAYE AND M. TOLENTINO, *Reducing the condition number for microlocal discretization problems*, Philos. Trans. R. Soc. Lond. A, 362 (2004), pp. 541–559.
- [28] V. DOMÍNGUEZ, I. G. GRAHAM, AND V. P. SMYSHLYAEV, *A Hybrid Numerical-Asymptotic Boundary Integral Method for High-Frequency Acoustic Scattering*, Preprint 1/2006, Bath Institute for Complex Systems, University of Bath, Bath, UK, 2006.
- [29] F. ECEVIT AND F. REITICH, *A high-frequency integral equation method for electromagnetic and acoustic scattering simulations: Rate of convergence of multiple scattering iterations*, in Proceedings of the Seventh International Conference on Mathematical and Numerical Aspects of Wave Propagation, Providence, RI, 2005, pp. 145–147.
- [30] J. ELSCHNER, *The double layer potential operator over polyhedral domains I: Solvability in weighted Sobolev spaces*, Appl. Anal., 45 (1992), pp. 117–134.



- [31] L. N. G. FILON, *On a quadrature formula for trigonometric integrals*, Proc. Roy. Soc. Edinburgh, 49 (1928), pp. 38–47.
- [32] M. GANESH, S. LANGDON, AND I. SLOAN, *Efficient evaluation of highly oscillatory acoustic scattering integrals*, J. Comput. Appl. Math., to appear.
- [33] C. GEUZAINÉ, O. BRUNO, AND F. REITICH, *On the  $O(1)$  solution of multiple-scattering problems*, IEEE Trans. Magnetism, 41 (2005), pp. 1488–1491.
- [34] E. GILADI AND J. B. KELLER, *A hybrid numerical asymptotic method for scattering problems*, J. Comput. Phys., 174 (2001), pp. 226–247.
- [35] D. GILBARG AND N. S. TRUDINGER, *Elliptic Partial Differential Equations of Second Order*, Springer-Verlag, Berlin, 1983.
- [36] P. J. HARRIS AND K. CHEN, *On efficient preconditioners for iterative solution of a Galerkin boundary element equation for the three-dimensional exterior Helmholtz problem*, J. Comput. Appl. Math., 156 (2003), pp. 303–318.
- [37] T. HUTTUNEN, P. MONK, F. COLLINO, AND J. P. KAIPIO, *The ultra-weak variational formulation for elastic wave problems*, SIAM J. Sci. Comput., 25 (2004), pp. 1717–1742.
- [38] D. HUYBRECHS AND S. VANDEWALLE, *On the evaluation of highly oscillatory integrals by analytic continuation*, SIAM J. Numer. Anal., 44 (2006), pp. 1026–1048.
- [39] F. IHLENBURG, *Finite Element Analysis of Acoustic Scattering*, Springer-Verlag, New York, 1998.
- [40] A. ISERLES, *On the numerical quadrature of highly-oscillating integrals. I. Fourier transforms*, IMA J. Numer. Anal., 24 (2004), pp. 365–391.
- [41] A. ISERLES, *On the numerical quadrature of highly-oscillating integrals. II. Irregular oscillations*, IMA J. Numer. Anal., 25 (2005), pp. 25–44.
- [42] C. E. KENIG, *Harmonic Analysis Techniques for Second Order Elliptic Boundary Value Problems*, AMS, Providence, RI, 1994.
- [43] R. KRESS, *Minimizing the condition number of boundary integral operators in acoustic and electromagnetic scattering*, Quart. J. Mech. Appl. Math., 38 (1985), pp. 323–341.
- [44] S. LANGDON AND S. N. CHANDLER-WILDE, *Implementation of a boundary element method for high frequency scattering by convex polygons*, in Advances in Boundary Integral Methods, Proceedings of the 5th UK Conference on Boundary Integral Methods, K. Chen, ed., Liverpool University Press, Liverpool, UK, 2005, pp. 2–11.
- [45] S. LANGDON AND S. N. CHANDLER-WILDE, *A wavenumber independent boundary element method for an acoustic scattering problem*, SIAM J. Numer. Anal., 43 (2006), pp. 2450–2477.
- [46] R. LEIS, *Zur Dirichletschen Randwertaufgabe des Außenraumes der Schwingungsgleichung*, Math. Z., 90 (1965), pp. 205–211.
- [47] D. LEVIN, *Analysis of a collocation method for integrating rapidly oscillatory functions*, J. Comput. Appl. Math., 78 (1997), pp. 131–138.
- [48] C. LIU, *The Helmholtz Equation on Lipschitz Domains*, Preprint 1356, IMA, University of Minnesota, Minneapolis, MN, 1995.
- [49] W. MCLEAN, *Strongly Elliptic Systems and Boundary Integral Equations*, Cambridge University Press, Cambridge, UK, 2000.
- [50] M. MITREA, *Boundary value problems and Hardy spaces associated to the Helmholtz equation in Lipschitz domains*, J. Math. Anal. Appl., 202 (1996), pp. 819–842.
- [51] F. OBERHETTINGER AND L. BADI, *Tables of Laplace Transforms*, Springer-Verlag, New York, Heidelberg, 1973.
- [52] O. J. PANIĆ, *On the solubility of exterior boundary-value problems for the wave equation and for a system of Maxwell's equations*, Uspekhi Mat. Nauk, 20 (1965), pp. 221–226 (in Russian).
- [53] E. PERREY-DEBAIN, O. LAGROUCHE, P. BETTESS, AND J. TREVELYAN, *Plane-wave basis finite elements and boundary elements for three-dimensional wave scattering*, Philos. Trans. R. Soc. Lond. Ser. A Math. Phys. Eng. Sci., 362 (2004), pp. 561–577.
- [54] S. PRÖSSDORF AND B. SILBERMANN, *Numerical Analysis for Integral and Related Operator Equations*, Birkhäuser Verlag, Basel, Switzerland, 1991.
- [55] J. R. RICE, *On the degree of convergence of nonlinear spline approximation*, in Approximations with Special Emphasis on Spline Functions, I. J. Schoenberg, ed., Academic Press, New York, 1969.
- [56] R. H. TORRES AND G. V. WELLAND, *The Helmholtz equation and transmission problems with Lipschitz interfaces*, Indiana Univ. Math. J., 42 (1993), pp. 1457–1485.
- [57] G. VERCHOTA, *Layer potentials and boundary value problems for Laplace's equation in Lipschitz domains*, J. Funct. Anal., 59 (1984), pp. 572–611.
- [58] V. J. ŠELEPOV, *The index of an integral operator of potential type in the space  $L_p$* , Soviet Math. Dokl., 10 (1969), pp. 754–757.